




Product Number: 0900-0-00-00-00-00-11-0

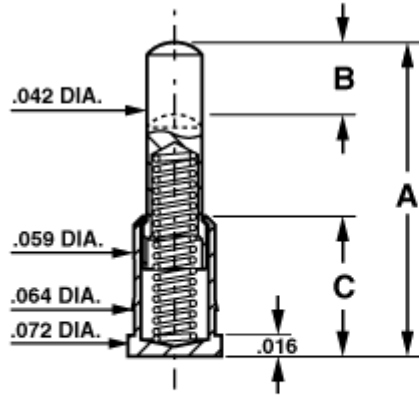

CONTACT STYLE	INITIAL HEIGHT A	STROKE	
		B	C
0900-0	.137	.039	.098
0900-1	.177	.055	.106
0900-2	.197	.055	.106
0900-3	.217	.055	.106
0900-4	.236	.055	.106

Description:

0900 - Spring-Loaded Pin

Packaging:

Packaged in Bulk

0900-X-00-00-00-00-11-0

Standard stroke, Surface mount  
Low profile

Mill-Max Part Number	Shell Plating	Contact Plating	RoHS Compliant
0900-0-00-00-00-00-11-0	20 μ" Gold over Nickel	00	

SHELL MATERIAL:

BRASS ALLOY (UNS C36000) per ASTM B 16

Properties of BRASS ALLOY:

- Chemical composition: Cu 61.5%, Zn 35.4%, Pb 3.1%†
- Hardness as machined: 80-90 Rockwell B
- Density: .307 lbs/in<sup>3</sup>
- Electrical conductivity: 26% IACS\*
- Melting point: 900°C/885°C (liquidus/solidus)

†(3 to 4% lead is used to permit "free machining" and is permitted by EC Directive 2002/95Annex 6; so all pin materials are RoHS compliant)

\*International Annealed Copper Standard, i.e. as a % of pure copper.