
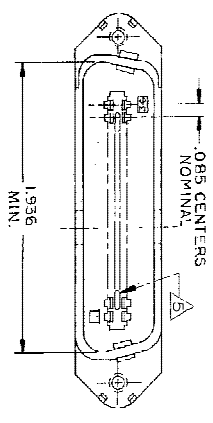
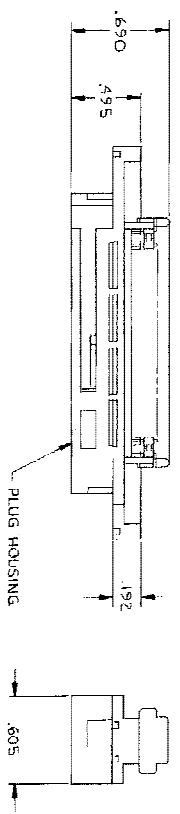


THIS DRAWING IS UNCLASSIFIED
 BY: TEO ELECTRONICS CORPORATION
 ALL RIGHTS RESERVED.

4 3 2 1

REV	DATE	DESCRIPTION	BY	CHKD	
00			J		
REVISED PER EOP-06-000523					
				DATE	BY
				8/24/07	ZYR/WLM

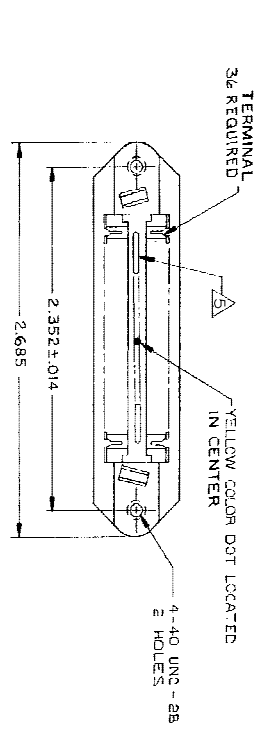

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
3. MATERIAL: HOUSING - POLYPHENYLENE (BLACK)
 TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH .000030 MIN GOLD,
 OR, GOLD FLASH OVER .000030 MIN PALLADIUM NICKEL, ON
 CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE
 OVER ENTIRE TERMINAL.
4. WIRE SIZE: 28-27-28 AWG 7 STRANDS OF COPPER CONDUCTORS, MAX INSULATION
 Ø.045 IS ACCEPTABLE FOR MOST APPLICATIONS.

△ CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

THIS DRAWING IS A CONTROLLED DOCUMENT		DATE	12-26-79	BY	G. BOWMAN
APPROVED FOR RELEASE		DATE	12-27-79	BY	M.O. FRIEL
APPROVED FOR PRODUCT SPEC		DATE	12-28-79	BY	M.O. WARD
APPLICATION SPEC		DATE		BY	
CUSTOMER DRAWING		DATE		BY	

552444

AS SHOWN 552444-1

DESCRIPTION PART NO

TYCO Electronics Corporation
 Harrisburg, PA 17105-5088

PLUG ASSY, 36 POSITIONS, E SLOT
 W/ 4-40 HOLES, CHAMP-LOK

SIZE DATE CODE DRAWING NO
 A2 100779 P-552444

SHEET 1 OF 1

REV J