
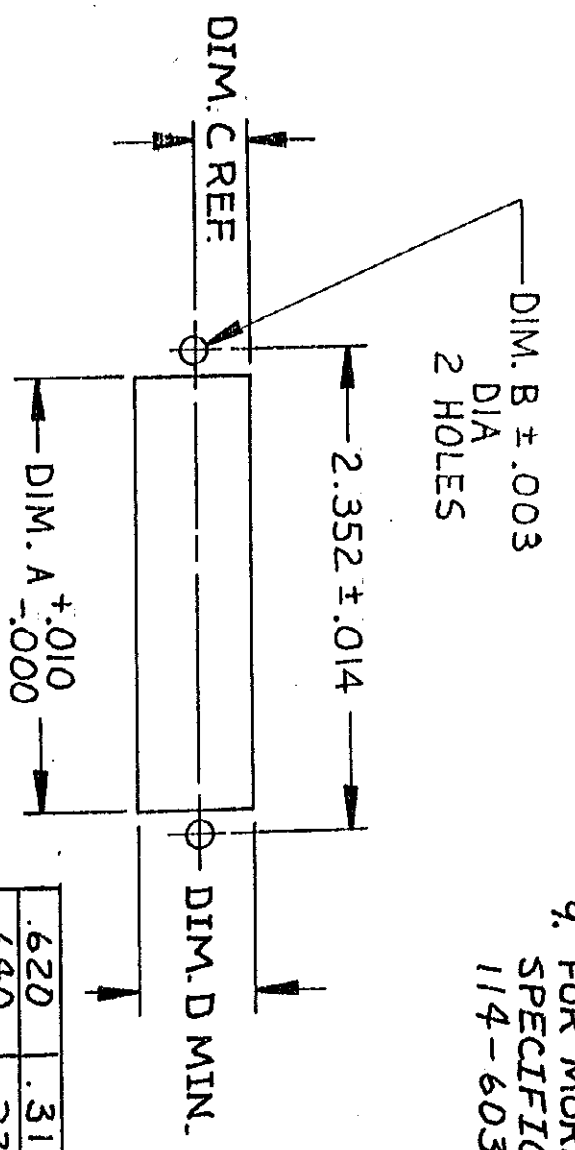
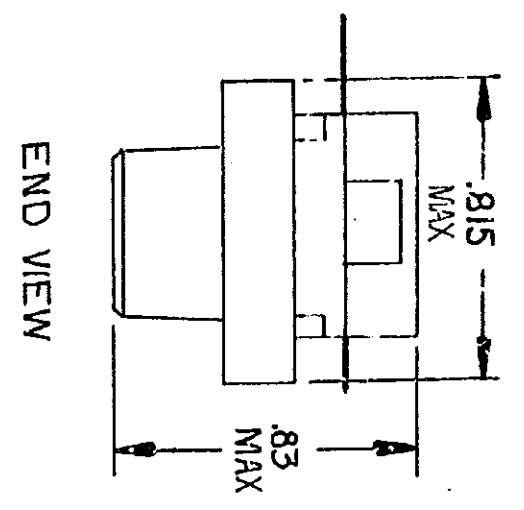


REVISIONS			
P	F	DESCRIPTION	DATE
D	LTR	REV PER ECN AA-3451	7/16/86
			BD
			4

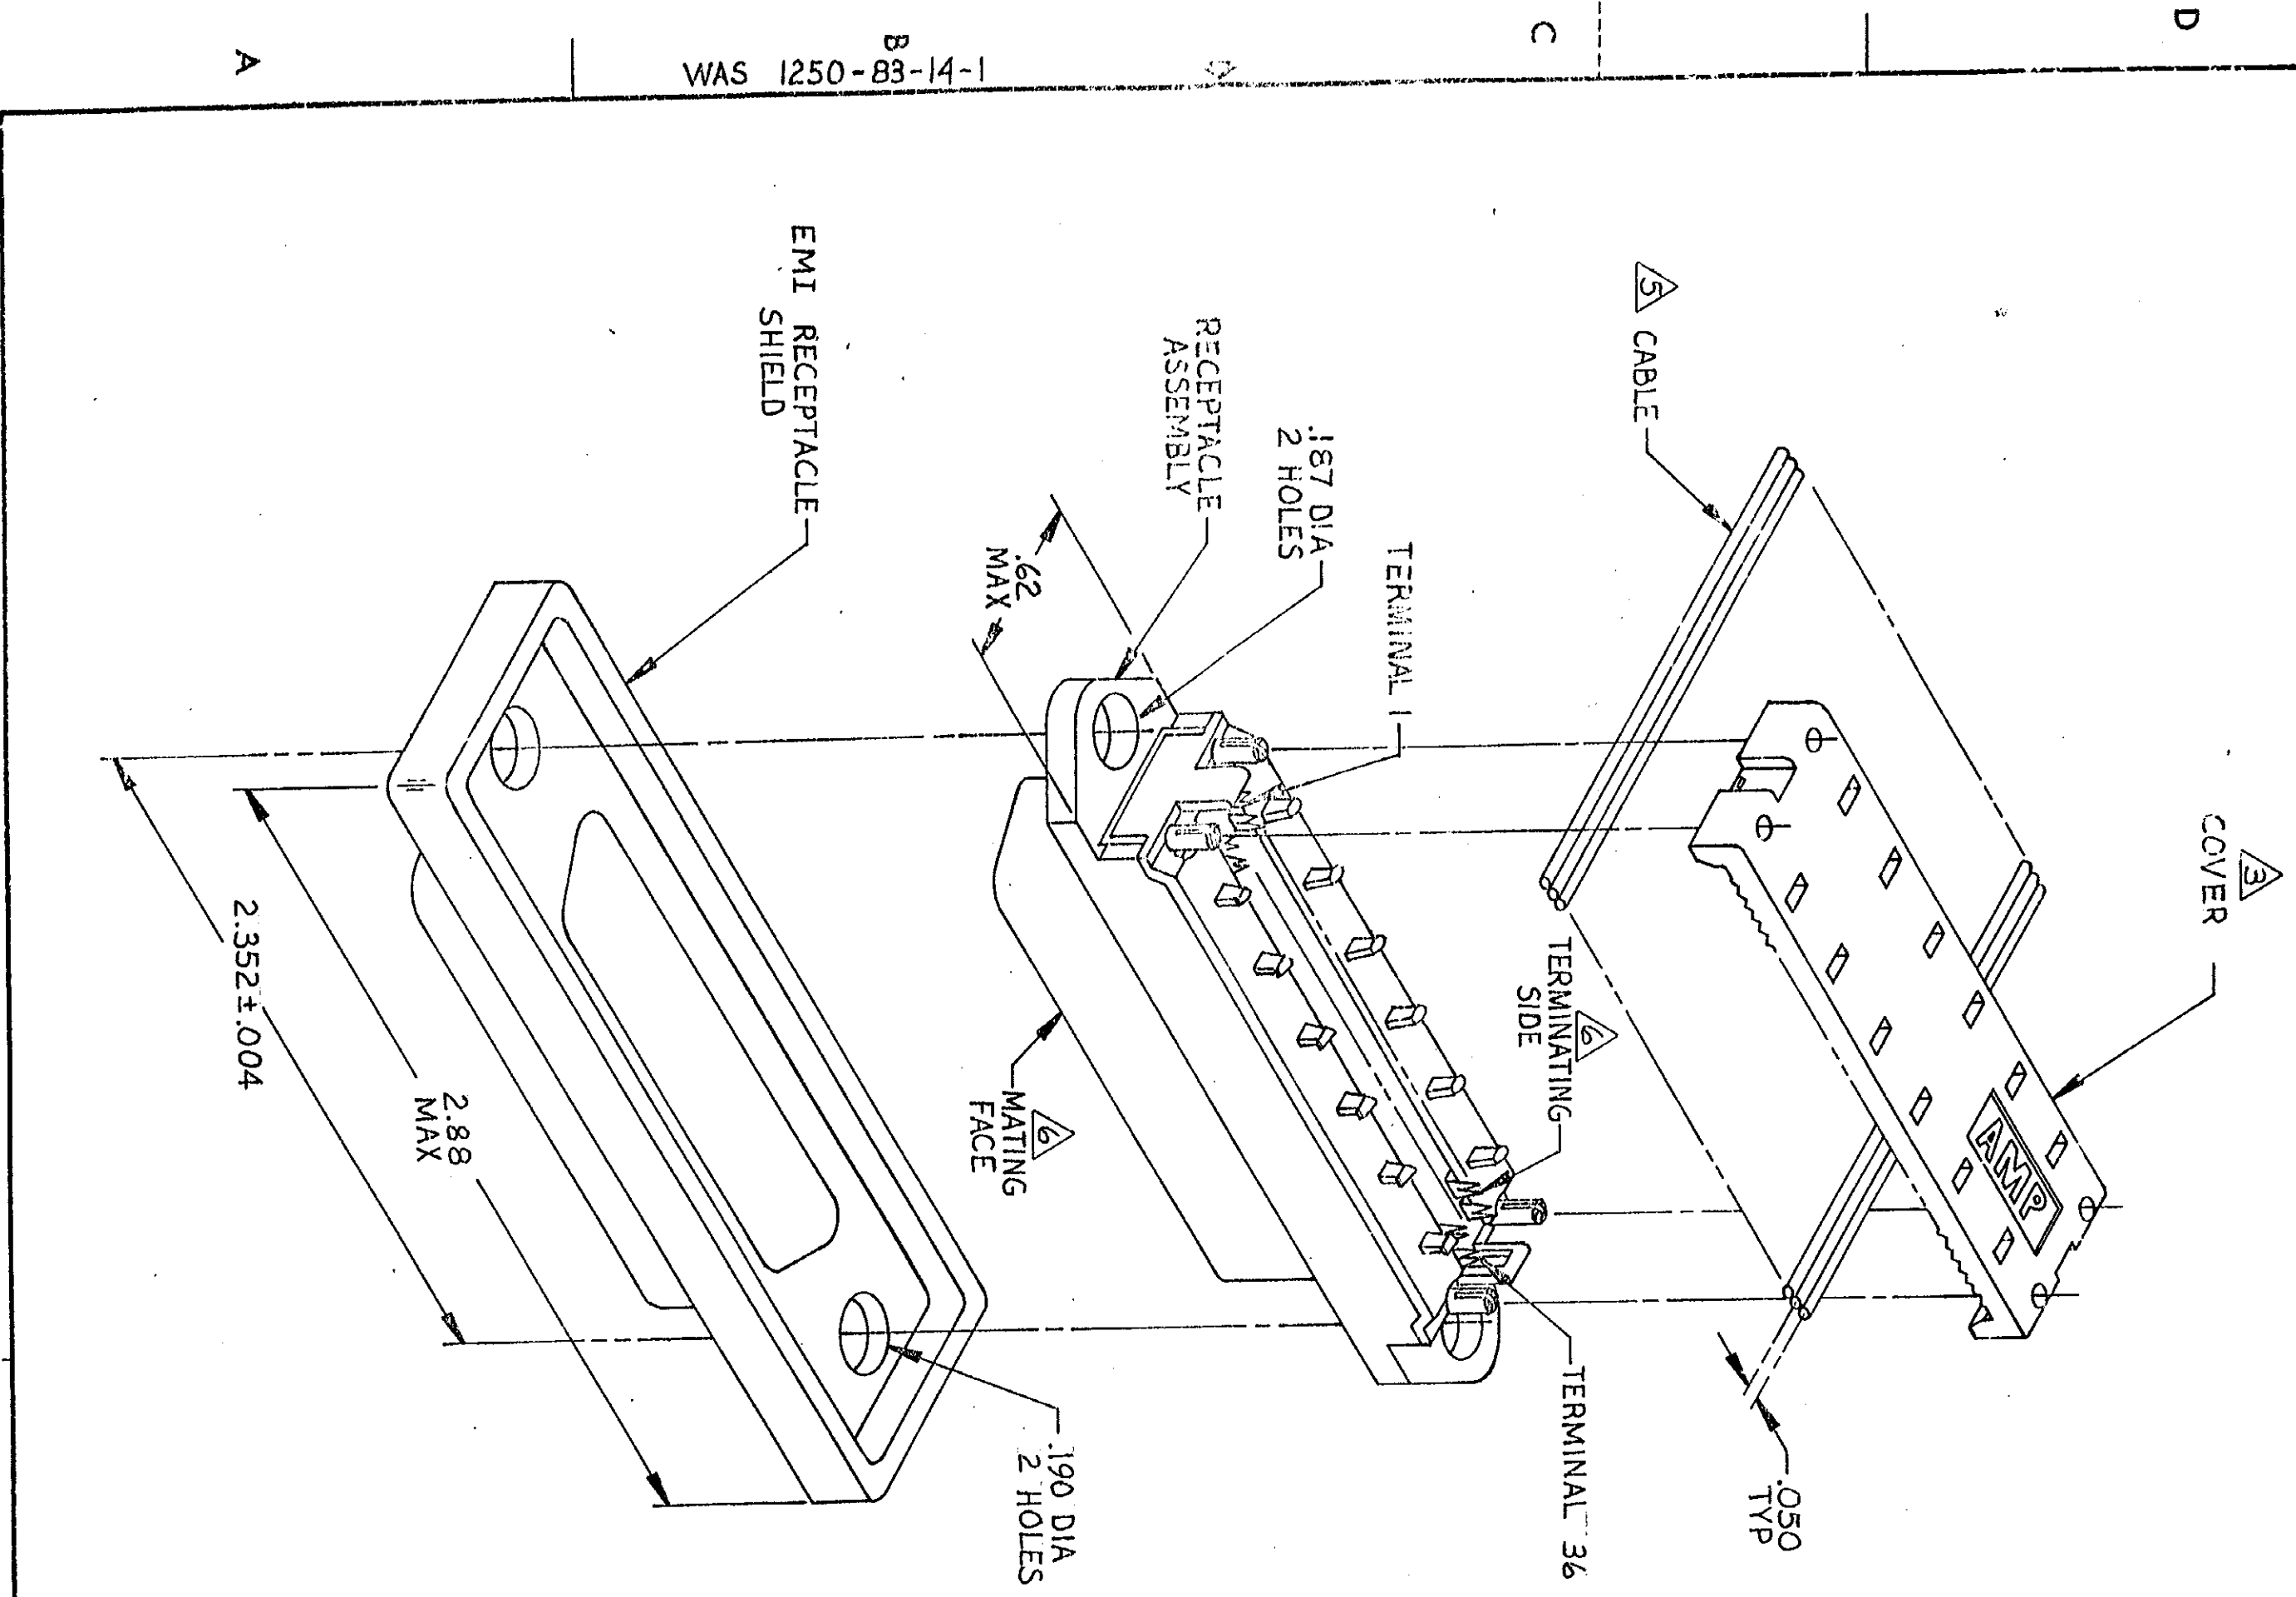

SUGGESTED PANEL CUTOUT

DIM. D	DIM. C	DIM. B	DIM. A	DESCRIPTION
.620	.310	.149	2.085	REAR PANEL MOUNTING
.640	.320	.126	2.000	FRONT PANEL MOUNTING

- 1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- 2. MATERIAL: HOUSING & COVER - POLYPHENYLENE OXIDE (BLACK)
TERMINALS - GOLD OVER NICKEL PLATED
HIGH STRENGTH COPPER ALLOY ON
MATING FACE & GOLD FLASH OVER NICKEL
PLATE ON TERMINATING SIDE.
EMI SHIELD - NICKEL PLATED DIE CASTING.
- 3. COVER SHOWN LOOSE BUT SHIPPED ASSEMBLED.
- 4. WIRE RANGE: 26 AWG SOLID THRU 30 AWG SOLID
AND 28 AWG STRANDED RIBBON CABLE.
- 5. FLAT CABLE SHALL BE FURNISHED BY CUSTOMER.
- 6. MATING FACE CONSISTS OF TWO ROWS OF TERMINALS
ON .085 CENTERS. TERMINATING SIDE CONSISTS OF
TERMINALS ON .100 CENTERS FOR AN EFFECTIVE
.050 TERMINATION.
- 7. PANEL THICKNESS RANGE: OUTSIDE MOUNTING-.125 MAX.
INSIDE MOUNTING-.062 MAX.
- 8. EMI SHIELD SHIPPED LOOSE.
- 9. FOR MORE INFORMATION REFER TO AMP PRODUCT
SPECIFICATION 108-6076 & APPLICATION SPEC
114-6030.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± .005 ANGLES		CONTRACT NO	AMP INCORPORATED Harrisburg, Pa. 17105
MATERIAL	FINISH	DR	NAME
		M. St. Buehly	EMI RECEPTACLE ASSEMBLY, 36 POSITION, LOW PROFILE, SHIELDED, CHAMP LATCH
		CHK M. St. Buehly	
		APPD M. St. Buehly	
		APPD J. D. ...	
		DSGN APPD	SIZE FSCM NO DRAWING NO
		OTHER APPD	C 00779 554348
			SCALE 2:1 SHEET 1 OF 1

554348-1 AS SHOWN

554348