
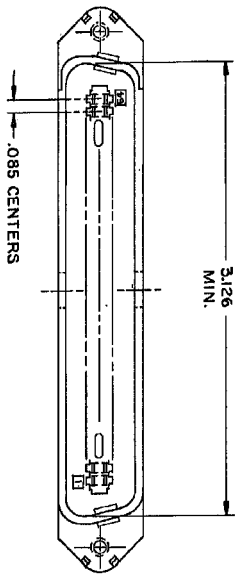
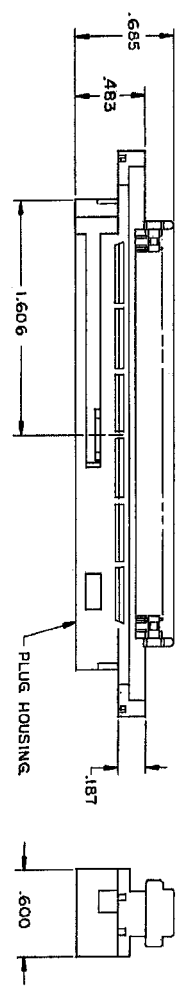


REV	DATE	DESCRIPTION	BY	CHKD
00	12-28-79	REVISED PER ECO-86-00653	H	ZYR/W/L/M

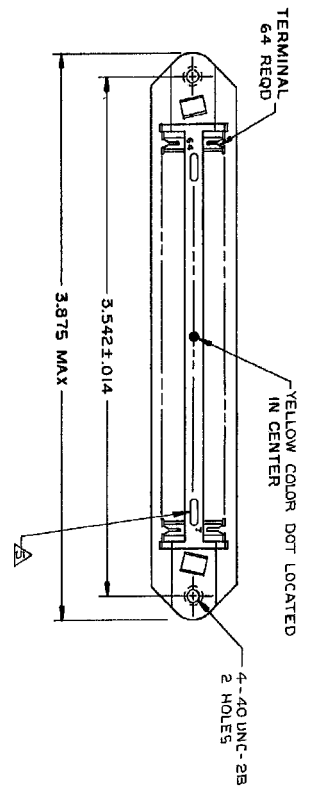

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
 2. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
 3. MATERIAL:
 - HOUSING - THERMOPLASTIC (BLACK)
 - TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH .000030 MIN GOLD, OR GOLD FLASH OVER .000030 MIN PALLADIUM NICKEL, ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
 4. WIRE SIZE: 26, 27, OR 28 AWG 7 STRANDS OF COPPER CONDUCTORS, MAX INSULATION ϕ .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
- △ CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

THIS DRAWING IS A CONTROLLED DOCUMENT		DATE: 12-28-79	
DRAWINGS		BY: G. BOWMAN	
CHECKS		DATE: 12-28-79	
APPROVED: M.D. FRIEL		DATE: 12-28-79	
DRAWING NO: 552488		PART NO: 552488-1	
APPLICATION SPEC		DESCRIPTION: PLUG ASSEMBLY, 64 POSITION, E SLOT	
RECORD		SCALE: 1" = 1"	
CUSTOMER DRAWING		SHEET: 1 OF 1	