



DESCRIPTION: MALE CENTRONICS BACKSHELL KIT

- BACKSHELL KIT INCLUDES:**
 (1) SOLDER CUP CONNECTOR
 (1) BACKSHELL WITH STRAIN RELIEF, (2) SCREWS
 (1) FACE PLATE
 (1) RUBBER GROMMET

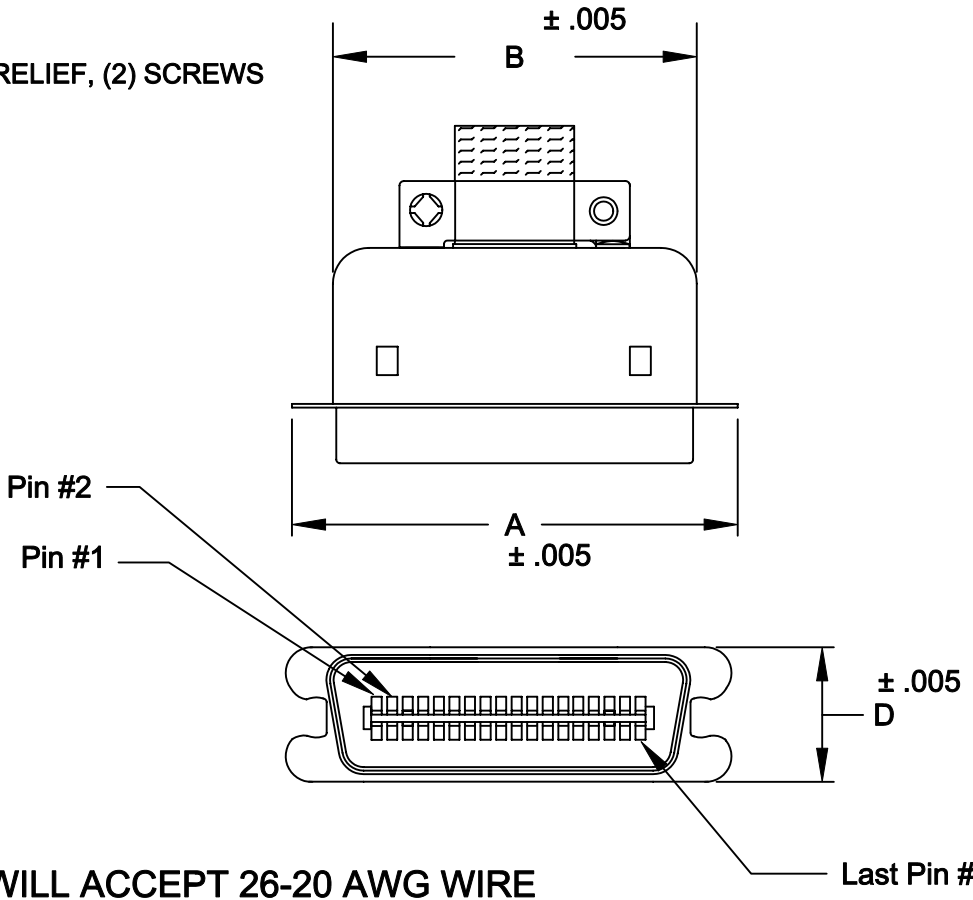

WILL ACCEPT 26-20 AWG WIRE

- 110-YYY-103L001
- SERIES _____
- POSITIONS _____
- 014 _____
- 024 - NOT AVAILABLE _____
- 036 _____
- 050 _____
- GENDER _____
- 1 = MALE _____
- 2 = FEMALE _____
- TERMINATION _____
- 0 = SOLDER CUP _____
- SHELL PLATING _____
- 3 = NICKEL _____
- HARDWARE OPTIONS _____
- 00 = NOT AVAILABLE _____
- PLATING OPTIONS _____
- 1 = GOLD FLASH _____

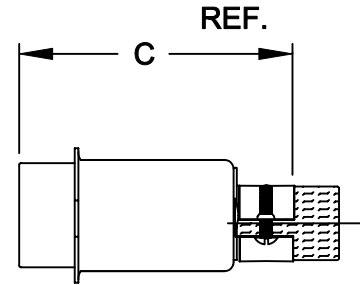

	A	B	C	D
014	1.496	1.132	1.572	.622
	38.00	29.75	40.06	15.80
024	1.919	1.593	1.560	.622
	48.75	40.45	39.61	15.80
036	2.431	2.090	1.624	.622
	61.76	53.10	41.25	15.80
050	3.026	2.677	1.730	.622
	76.86	68.00	43.95	15.80

MATERIALS:

- INSULATOR: GLASS-FILLED THERMOPLASTIC**
 UL RATED 94V-0 - 230°C PROCESS TEMP.
- CONTACTS: COPPER ALLOY**
- SHELL: STEEL, NICKEL PLATED**
- RoHS COMPLIANT**
- ELECTRICALS:**
- CONTACT CURRENT RATING: 5 AMPS**
- DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.**
- INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC**
- CONTACT RESISTANCE: 30 mOHMS MAXIMUM**
- OPERATING TEMPERATURE: -55°C TO +125°C**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 7-15-05
	<h1>NorComp</h1>		CHECKED:	DATE:
SCALE: 1:1			SHEET 1	OF 1
		DWG NO.	110-YYY-103L001	