
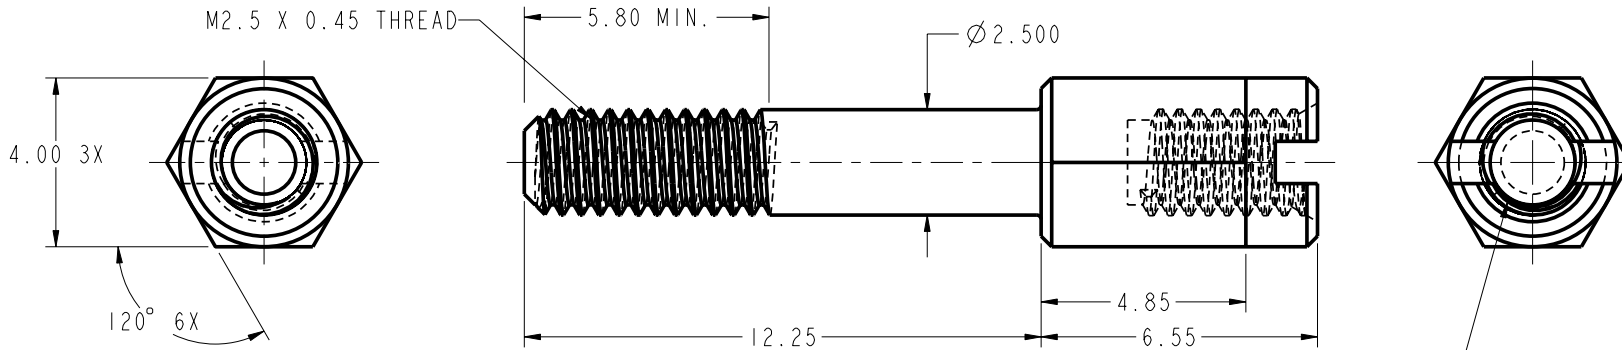


PRODUCT NUMBER
10009634-001/10009634-001LF

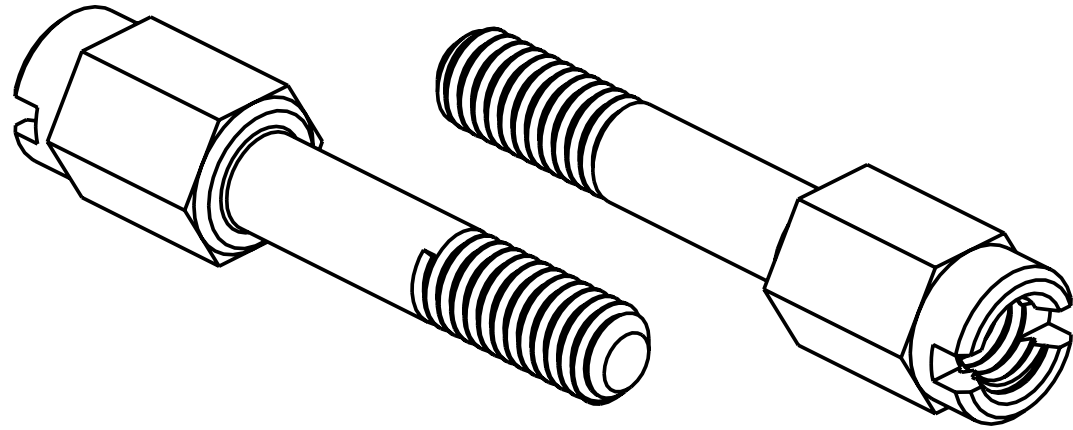

M2.5 X 0.45 THREADS
X 4.50 DEEP MIN.

NOTES

1. MATERIAL: STAINLESS STEEL
2. MAXIMUM TORQUE OF 0.45 N-m (4 lbf-in) ALLOWED FOR THREADED STANDOFF AT ASSEMBLY TO RECEPTACLE GROUND PLATE.
3. LF SUFFIX ADDED TO THE PARTNUMBER FOR ROHS COMPLIANT VERSIONS
4. LF PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-12-083
5. LEAD FREE OR ROHS DIRECTIVE LABELLING TO BE PROVIDED AS PER GS-14-920 FOR LEAD FREE VERSION

rev	ecn no	dr	date
A	V03-0936	GIP	2003/08/21
B	V03-0999	GIP	2003/09/23
C	106-0123	HVN	2006/07/26
D	106-0181	HVN	2006/09/28
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface 3.200	tolerance std	projection	mm
Dr G.PETERS		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Eng D.BRANN	2003/08/21	ANGULAR	0.X ±.30		
Chr HIRAN V N	2006/09/28	LINEAR	0.XX ±.10	ECN 106-0123	
Appr HIRAN V N	2006/09/28	0° ±2°	0.XXX ±.050	Spec ref	
		THREADED STANDOFF		dwg no 10009634	Rev. D
catalog no		CUSTOMER		sheet 1 of 1	

REV F - 2006-04-17