


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

REV	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
2	BD	48				B	REVISED & REDRAWN PER ECN-2262	-	-
						C	REVISED PER ECN BD5212	08/28/91	-
						D	OBS -2 PER ECN BD6177	08/17/92	TS

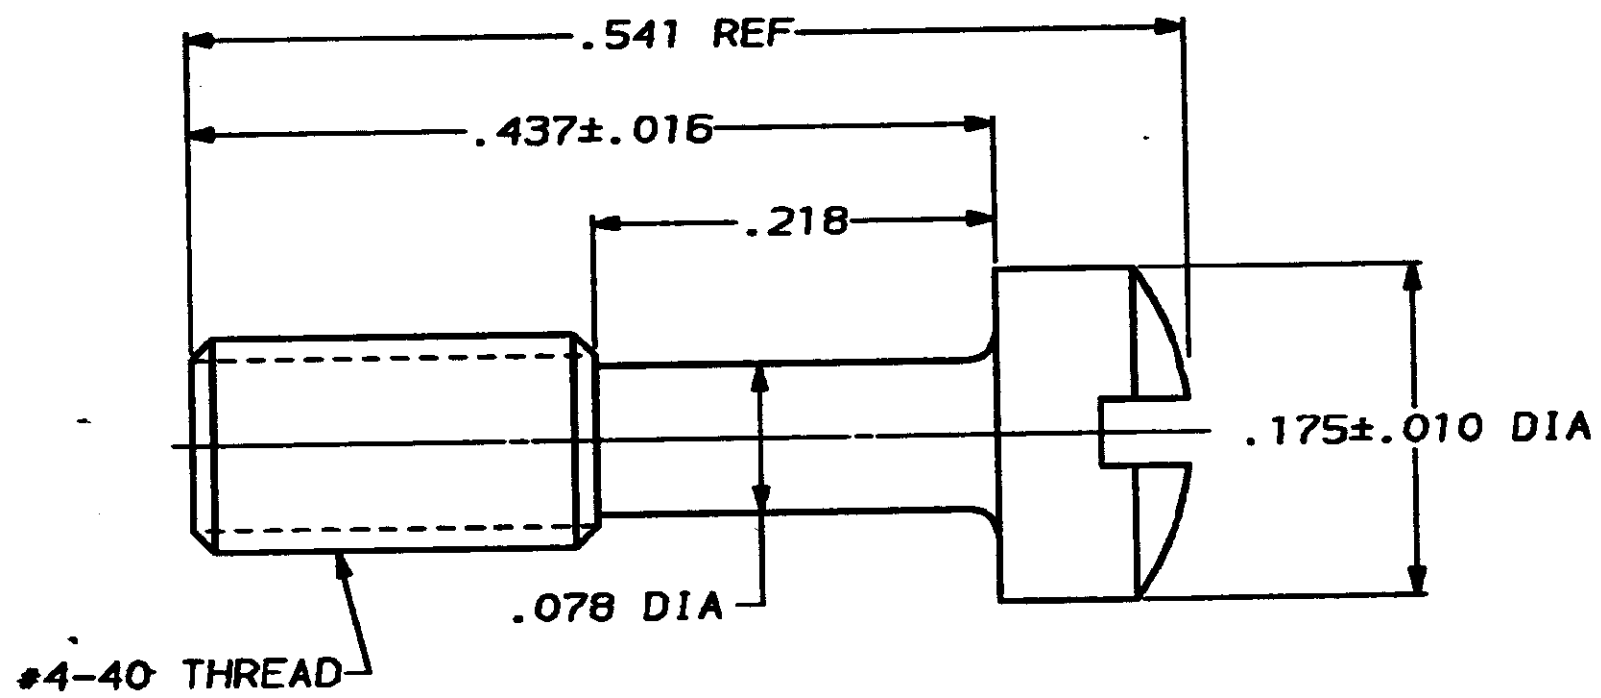

1. MUST BE USED WITH PART NUMBER 206473.
2. ZINC PLATED PER ASTM B633, TYPE II, CLASS SC1, YELLOW CHROMATE.
3. ZINC PLATED PER ASTM B633, TYPE III, CLASS SC1, CLEAR CHROMATE.

	3	206052-3
OBSOLETE	2	206052-2
FINISH		PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 12 PLC DEC * - 13 PLC DEC * .005 ANGLES * -	OR C. SIGNIF 9-10-88 N. S. LEECH APPD 8-15-88 R.A. MOORE APPD 8-10-88 V. J. MOORE	AMP INCORPORATED HERTFORDSHIRE, ENGLAND	
MATERIAL COLD ROLLED STEEL PER ASTM A108	PRODUCT SPEC	SADDLE SCREW, AMPLIMITE®	
FINISH SEE TABLE	APPLICATION SPEC	SIZE B	PART NO 00779
		SCALE 10.1	DRAWING NO 206052
			SHEET 1 OF 1

CUSTOMER DRAWING