
# CTF SERIES PLASTIC D SUBMINIATURE SHELL (ACCESSORIES)

### General

HIROSE CTF series plastic D subminiature shells offer the highest quality of mechanical design and appearance. Available to fit 9, 15, 25, and 37 position connectors and

most competitors products. LN mounts allow for design flexibility.

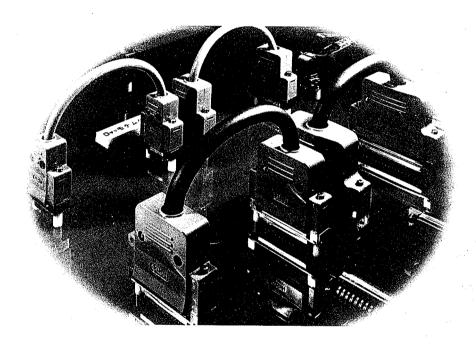

### **Features**

- (1) Standard screw type locking mechanism provides a strong and secure lock.
- (2) ABS resin molding material offers light weight, sturdy construction.
- (3) Easy to assemble and service because the case is split at the center of the cable inlet and few screws are used.
- (4) Two types of locking devices are available, rectangular and hexagonal, to meet different panel mounting complies.
- (5) The 25-contact model complies with the modem plug case specified in JIS-C-6361.
- (6) Can easily incorporate solderling (HD) and crimping.

## **Applications**


Modems in communications equipment such as computers, peripherals and terminal equipment, control

equipment, measuring instruments, and export equipment.

### **Materials**

Part	Material	Finish		
Plug case	ABS resin	2.5PB 6/2(color)		
Locking device	Steel or zinc alloy die casting	Treatment with dichromate over zinc plating		

### **Ordering Information**

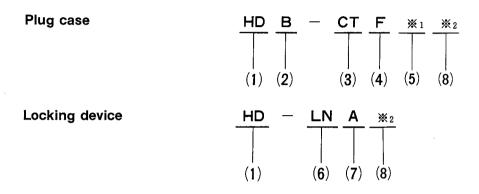

- (1) Connector series
- (2) Connector size: E (9 contacts), A (15 contacts), B (25 contacts), C(37 contacts) Note: Not available for 50pos. cover.
- (3) Type of plug case

CT: Plug case with a vertical cable inlet opening

(4) Serial sign for series

F: Plug case made of plastic

(5) Locking screws

No sign: To be locked with a screwdriver

1: To be locked by hand

(6) Locking device

LN: screw type locking device

(7) Type of locking device

Provided with a sequence of upper-case alphabe-

tic charactors.

No sign: Rectangular


A: Hexagonal

(8) Type of screw


Provided with a sequence of Arabic numerls.

No sign: M2.6 (4-40): inch

## Dataphone shell (To be locked with a screwdriver)

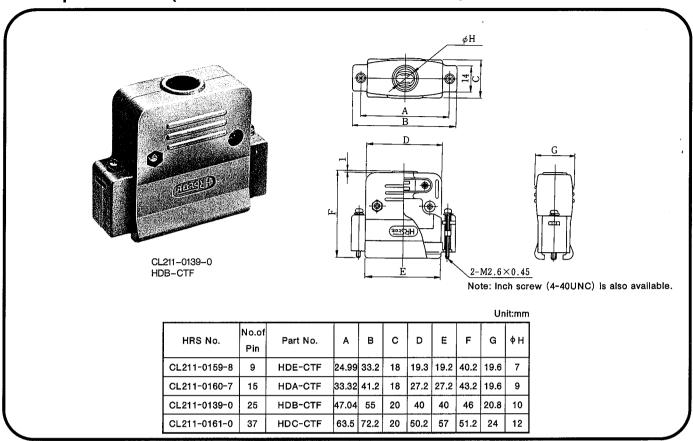

## Dataphone Shell (To be locked by hand)

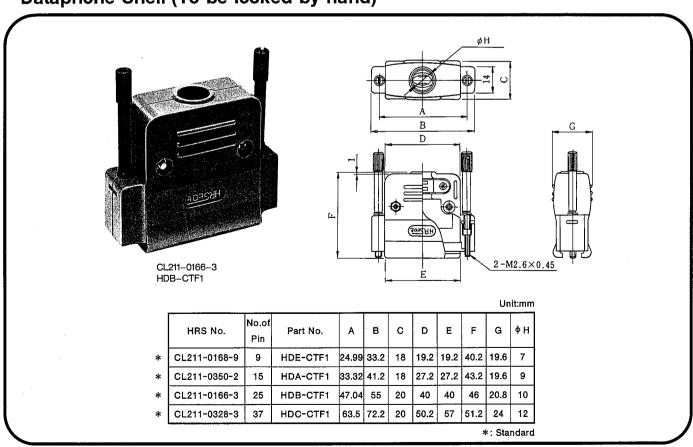

## SM Series (D SUB) Accessory

### Spring lock

Material

Body:

Stainless steel

Screws:


Steel

Finish

Treated with


dichromate over

zinc plating

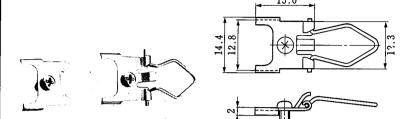

CL211-0122-8


 $M2.6 \times 0.45$ 




 $M2.6 \times 0.45$ 

CL211-0123-0 DA-LP

### Sliding lock





Material

Body:


Stainless steel


Screws: Finish

Steel

Screws: Treated with dichromate

over zinc plating







(1) Connector size: E( 9 contacts)

A(15 contacts) B(25 contacts)


C (37 contacts)

	HGS.No.	Part No.	Α	В	No.of pin
	CL211-0679-8	DE-PLA	35.37	28.51	9
	CL211-0680-7	DA-PLA	43.7	36.84	15
1	CL211-0681-0	DB-PLA	57.42	50.56	25
I	CL211-0682-2	DC-PLA	73.88	67.02	37

### D-PLB

CL211-0732-9







Material Body:


Steel

Finish Screws:


Treated with dichromate

over zinc plating






(2) Applicable for any size of our connectors.



### SM Series (D SUB) Accessory

### Screw lock (for HD-LNA)

Note: Minimum ordering quantity is one package, which contains two units.

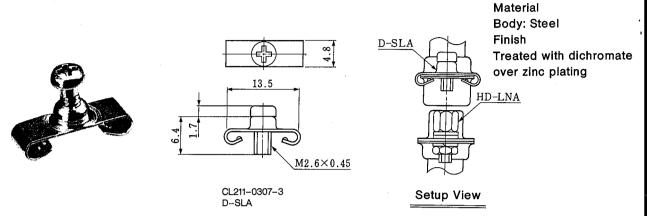


Before mounting the D-SLA, loosen the screw slightly

- Note (1) Applicable for 9 to 37 contacts.
  - (2) Minimum ordering quantity is one package which contains two units.

#### Locking device


Note: Minimum ordering quantity is one package, which contains two units.

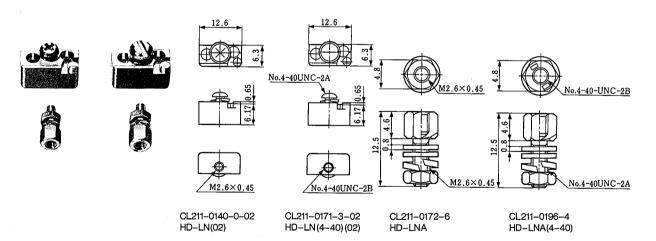


			_
	Applicable panel thickness	Finish	
HD-LN	Treated with dichroma over zinc plating		
HD-LN (4-40)	1.2mm or less	Treated with dichromat over zinc plating	
HD-LN (02)	4.0.4.0	Treated with dichromate over zinc plating	
HD-LN (4-40) (02)	1.2-1.6mm	Treated with dichromate over zinc plating	

Material
Steel or zinc alloy
Finish
Treated with dichromate over zinc plating


## SM Series (D SUB) Accessory

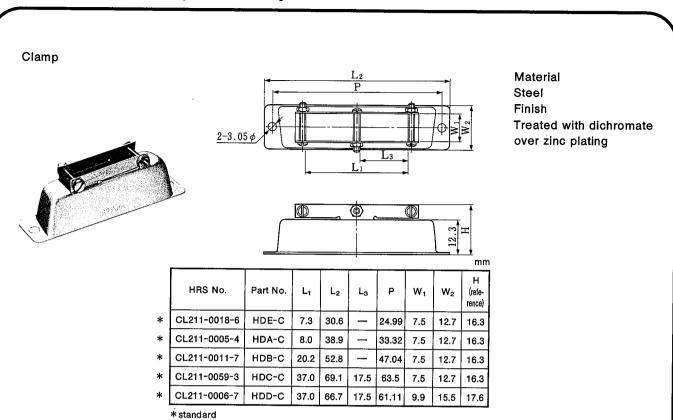












For male connector	HRS No.	No.of pin	Part No.	Α	В
	CL211-0777-7	9	DE-9P-DC1	18.7	10.2
	CL211-0778-0	15	DA-15P-DC1	27.0	10.2
	CL211-0779-2	25	DB-25P-DC1	41.0	10.4
	CL211-0780-1	37	DC-37P-DC1	57.7	10.6
	CL211-0781-4	50	DD-50P-DC1	55.0	13.3

	HRS No.	No.of pin	Part No.	A	В
For female connector	CL211-0782-7	9	DE-9S-DC1	17.4	8.8
	CL211-0783-0	15	DA-15S-DC1	25.6	8.8
	CL211-0784-2	25	DB-25S-DC1	39.3	8.8
	CL211-0785-5	37	DC-37S-DC1	55.8	8.8
	CL211-0786-8	50	DD-50S-DC1	53.4	11.6

Note:Dust cap for male connector cannot be used for the connector with locking device (LN)







HOE-9S-OC HRSECTE

Material
Polyethylene resin
Finish
Color: Natural

CL211-0162-2 DB-25S-DC CL211--0130-6 HDE--9S--DC