

1


2

3

4

A


A

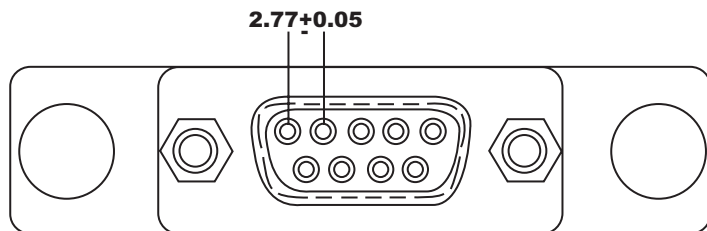

2.77±0.05

B

B

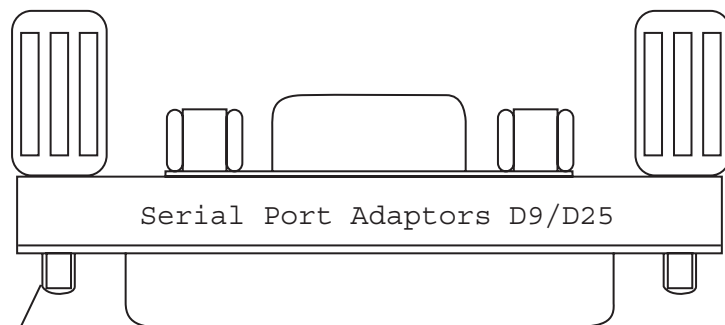


Serial Port Adaptors D9/D25

UNC #4-40

2.77±0.05

C

C

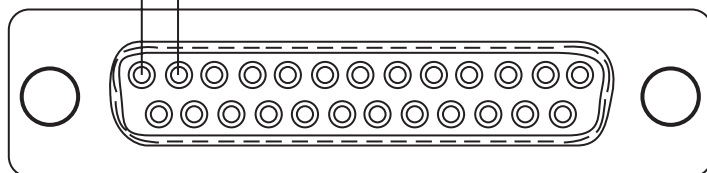

MA 001D (DB9F/25F Adaptor)

PIN Out: 09Female 25Female

1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

1.Label: Orange Color with White Character

2.One Side: Serial Port Adaptors D9/D25

3.The Other Side: MINI Adapter

Specification:

1.Insulator: PBT glass fiber reinforced UL 94VO

2.Contact: Brass

3.Contact Plating: Gold Plated over Nickel

4.Shell: Tin Plated Shell

5.Current Rating: 3 AMP

6.Dielectric Strength: 500V AC for one minute

7.Insulator Resistance: 500M min at 500 V DC

8.Temperature:-25°C +105°C

Description

Name :

AB469-R

ASSMANN
Electronic Components

RoHS
Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4

D

D