
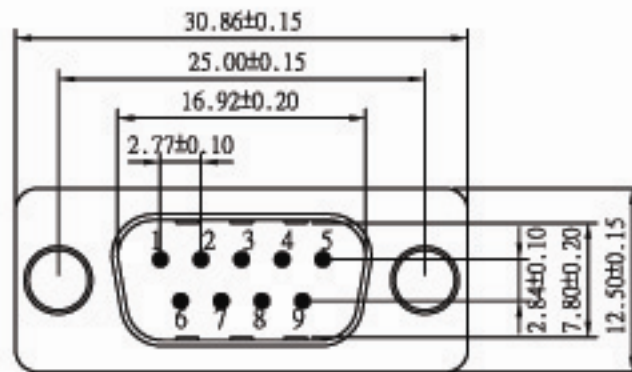
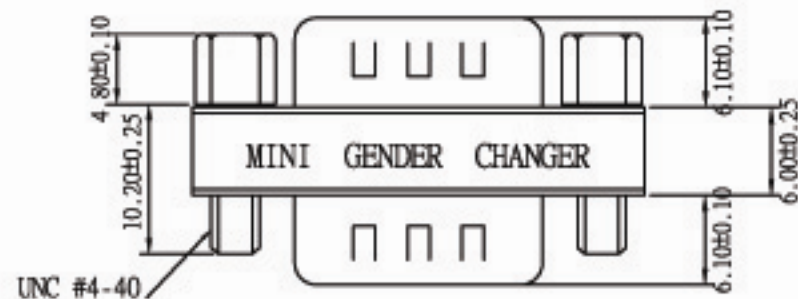




UNC #4-40 Hexscrew

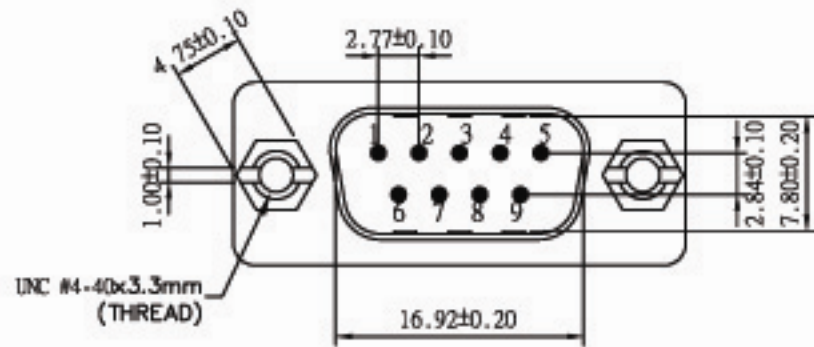

DGC 09 M/M GENDER CHANGER

PIN OUT: 9Male

9Male

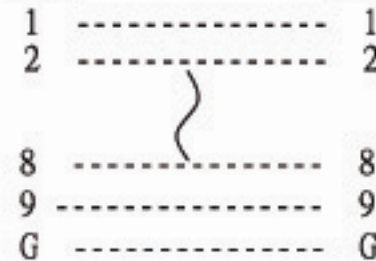

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 ASSMANN ELECTRONICS

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C — +105°C

Edition
A2

ASSMANN Electronics, Inc.

SCALE
2:1

UNLESS OTHERWISE SPECIFIED TOLERANCES:
φ: ±0.10
L: ±0.15
S: ±0.05

PART NO.

AB410-R

DWG NO.

TD0001-03

DATE

30/Jun-2003

2

修改螺絲(螺絲5.2mm改為6.2mm)

2003/06/30

1

修改貼紙(R.O.C. PATENT 64341 ASSMANN ELECTRONICS 改為MINI GENDER CHANGER)

2001/11/30



DRAWN

Fu Hao

CHECKED

APPRD

Customer REVISION

DESCRIPTION

DATE

PAGE
1/1