



UNC #4-40 Hexscrew


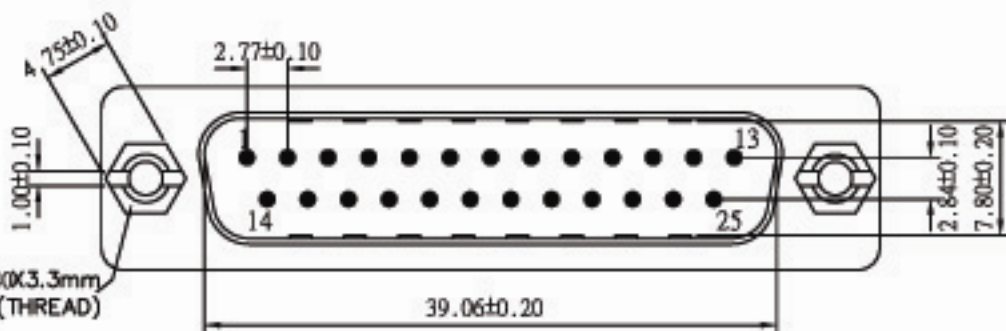


DGC 25 M/M GENDER CHANGER

PIN OUT: 25Male

25Male

1	-----	1
2	-----	2
24	-----	24
25	-----	25
G	-----	G

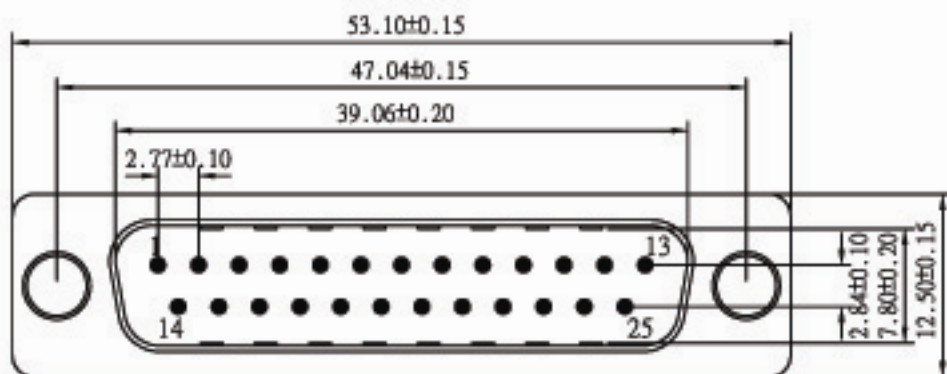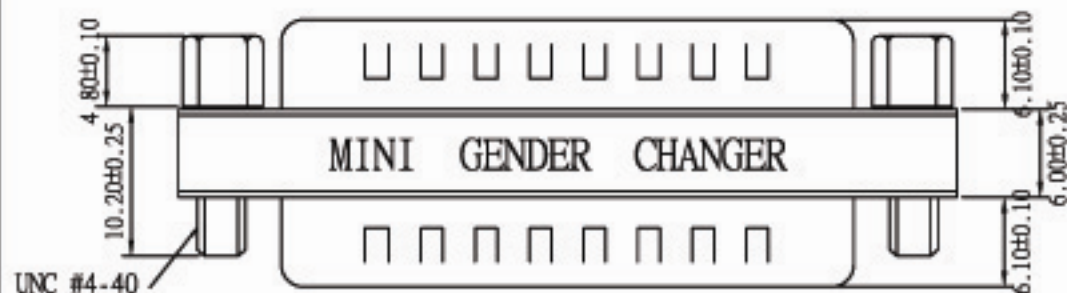

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 CHINA

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C—+105°C

Edition  
A2

ASSMANN Electronics, Inc.

SCALE  
2:1

UNLESS OTHERWISE SPECIFIED TOLERANCES:  
M: 0.10 0.20  
F: 0.05 0.15  
G: 0.05 0.10

PART NO.

AB414-R

DWG NO.

TD0007-03

DATE

30/Jun-2003

UNIT  
mm

Page  
1/1



DRAWN

*Fu Hao*

CHECKED

APPRD

Customer	REVISION	DESCRIPTION	DATE
	2	修改螺絲(螺絲5.2mm改為6.2mm)	2003/06/30
	1	修改貼紙(R.O.C. PATENT 64341 <small>CHINA</small> 改為MINI GENDER CHANGER)	2001/11/30