



SIZE	Part Num.	Threading
25	8655MHRA2501LF	UNC 4.40

NOTES:

Material and finish: Zinc die-cast
nickel plated
Cable strain relief: Steel fibre reinforced
Polycarbonate (UL94V-0)
for EMI/RFI screening
Jackscrew: black UNC 4.40
Temperature range: -40°C to 120°C
Cable diameter: 4,0 to 13,0mm
Attenuation factor: >40 dB between 30MHz
and 1 GHz
Packaging: Bulk, in box of 100 P/N
Covers screwing force (max): 100Ncm
Jackscrew screwing force (max): 75 Ncm

NOTE:RoHS INFORMATIONS

-The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
-The product is not intended to be exposed to a manufacturing solder process.
-Packaging spec: see GS-14-920.

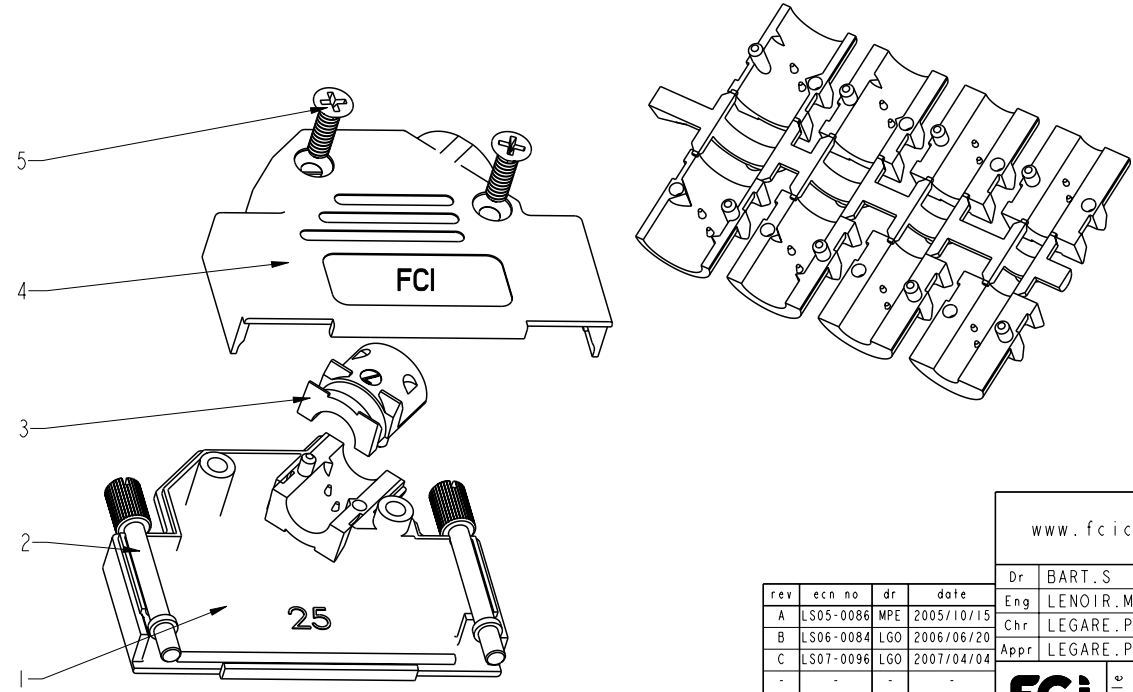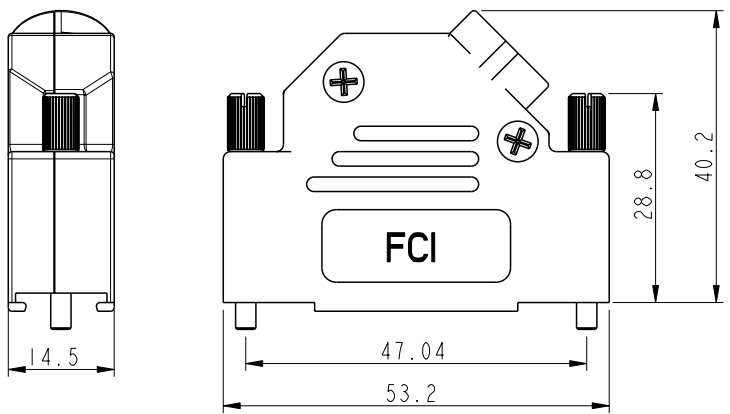

DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1			1	
JACKSCREW	2	1		2	
STRAIN RELIEF	3			2	
COVER TOP	4			1	
SCREW POZIDRIVE	5			2	


Copyright FCI

rev	ecn no	dr	date
A	LS05-0086	MPE	2005/10/15
B	LS06-0084	LGO	2006/06/20
C	LS07-0096	LGO	2007/04/04
-	-	-	-
-	-	-	-
-	-	-	-


www.fciconnect.com		surface - ✓	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	BART.S	2005/10/15	ANGULAR	LINEAR	size A3 Scale 3:2
Eng	LENOIR.M	2005/10/15	0.X	±0.3	ECN LS07-0096
Chr	LEGARE.P	2005/10/15	0.XX	±0.1	
Appr	LEGARE.P	2005/10/15	0.XXX	±0.05	
Product family				D-SUB	Spec ref
				D-SUB METAL SHELLS	
				ANGLED	10061512C
catalog no				-	Rev. C
				-	sheet 1 of 3

REV F - 2006-04-17


SIZE	Part Num.	Threading
09	8655MHRA0901LF	UNC 4.40

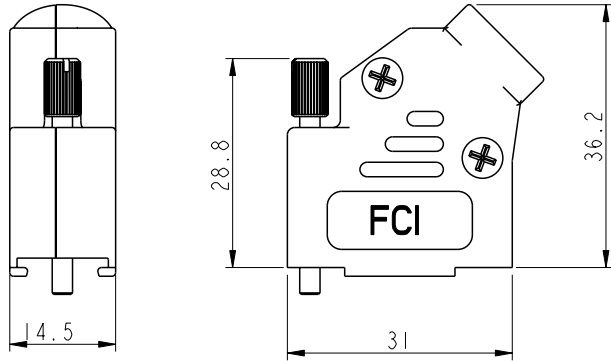

SIZE	Part Num.	Threading
15	8655MHRA1501LF	UNC 4.40

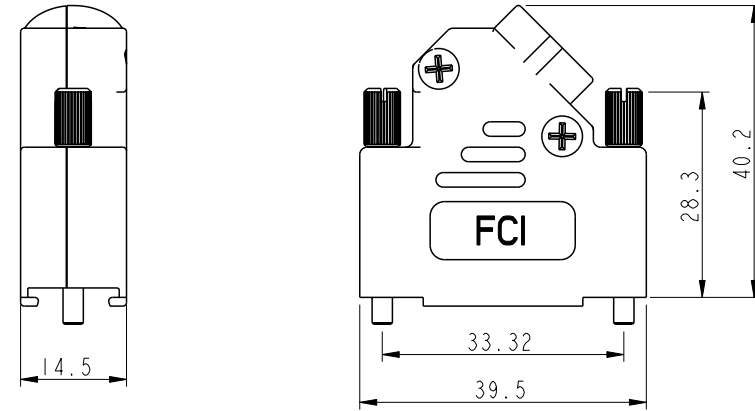

SIZE	Part Num.	Threading
37	8655MHRA3701LF	UNC 4.40

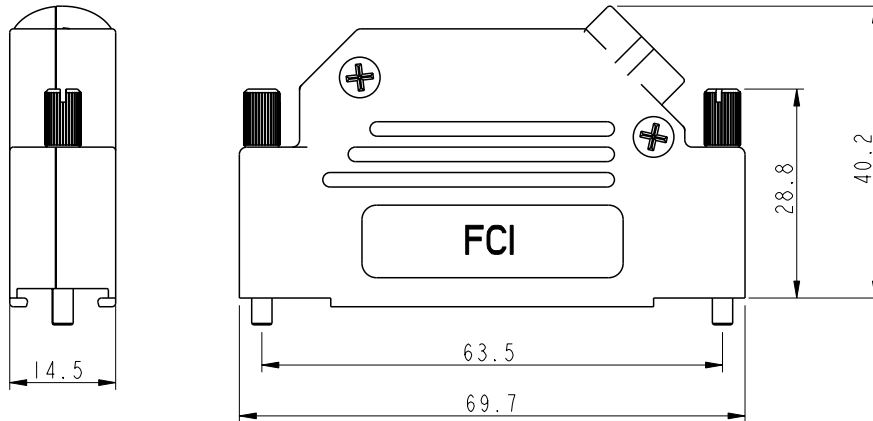


Copyright FCI.

www.fciconnect.com		surface - ✓	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	BART.S	2005/10/15	ANGULAR	size	Scale
Eng	LENOIR.M	2005/10/15	LINEAR	A3	3:2
Chr	LEGARE.P	2005/10/15	0° ±2°	0.X ±0.3	
				0.XX ±0.1	
				0.XXX ±0.05	ECN LS07-0096
Appr	LEGARE.P	2005/10/15	Product family	D-SUB	Spec ref
	title D-SUB METAL SHELLS			dwg no	10061512C
					Rev. C
			catalog no	-	sheet 2 of 3


REV F - 2006-04-17

CABLING INSTRUCTIONS


1- Use two halves of strain relief, different sizes can be mixed (Ø4,5,7 or 9)

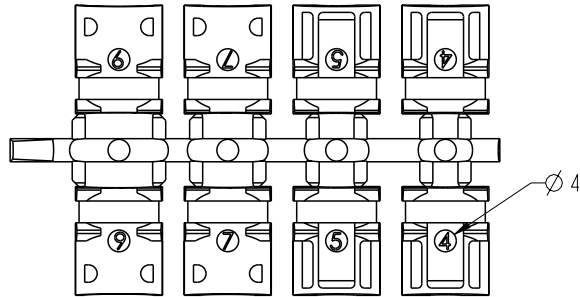


2- Strip cable 18mm and shape to two pigtails

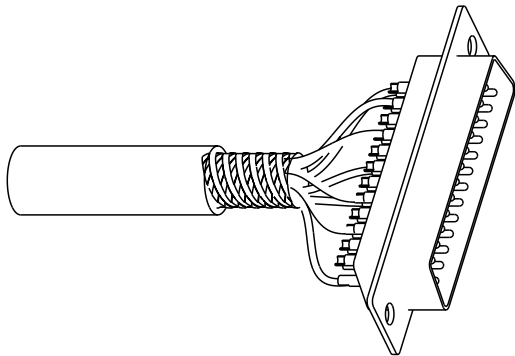


3- Attach the strain relief around the cable

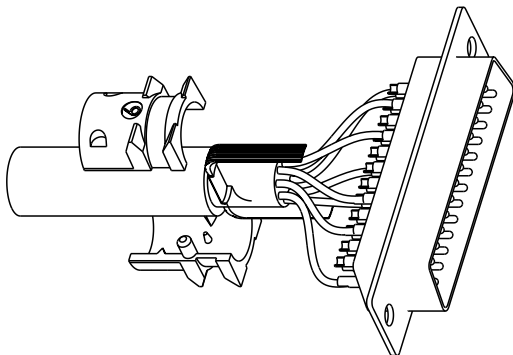


4- Bend cable shielding back on outside of strain relief

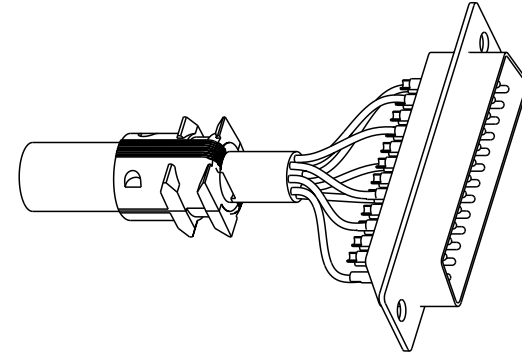

5- Mount connector and cable into the backshell

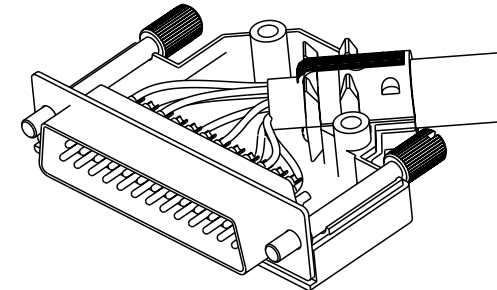

6- Assemble the other half screwing force: 100 Ncm

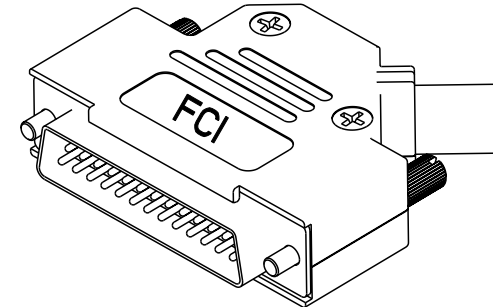

Copyright FCI.

REV 1 - 2006-04-17

www.fciconnect.com			surface - ✓ ISO 1302	tolerance std ISO 406 ISO 1101	projection ⊕	mm ↔
TOLERANCES UNLESS OTHERWISE SPECIFIED			ANGULAR	LINEAR	size A3	Scale 3:2
Dr	BART.S	2005/10/15	0° ±2°	0.X ±0.3 0.XX ±0.1 0.XXX ±0.05	ECN	LS07-0096
Eng	LENOIR.M	2005/10/15			Spec ref	
Chr	LEGARE.P	2005/10/15				
Appr	LEGARE.P	2005/10/15	Product family	D-SUB		
	title D-SUB METAL SHELLS ANGLED		dwg no	10061512C		Rev. C
	catalog no	-			sheet 3 of 3	