



SIZE	Part Num.	Threading
25	8655PHRA2501LF	UNC 4.40

NOTES:

Material: Polycarbonat (UL94V-0)
 Cable strain relief: Steel fibre reinforced Polycarbonat (UL94V-0)
 Temperature range: -40°C to 120°C
 Cable diameter: 4,0 to 13,0 mm
 Jackscrew: UNC 4.40 black
 Packaging: Bulk, in box of 100 P/N
 Covers screwing force (max): 100 Ncm
 Jackscrew screwing force (max): 75 Ncm

A

B

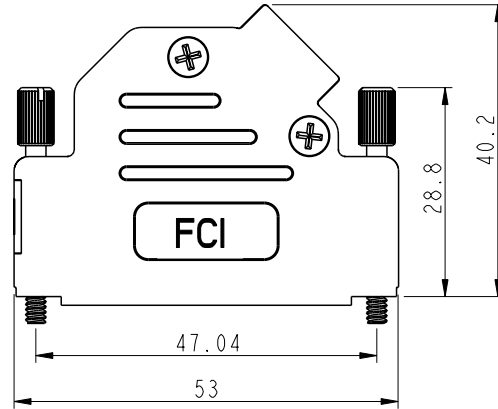




A

B

NOTE:RoHS INFORMATIONS
 -The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
 -The product is not intended to be exposed to a manufacturing solder process.
 -Packaging spec: see GS-14-920.

C

D

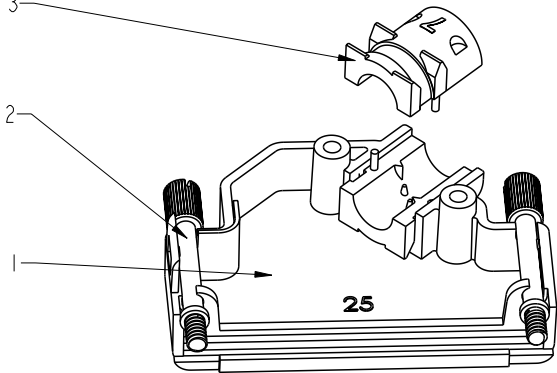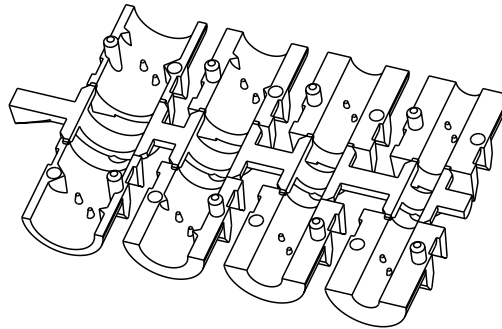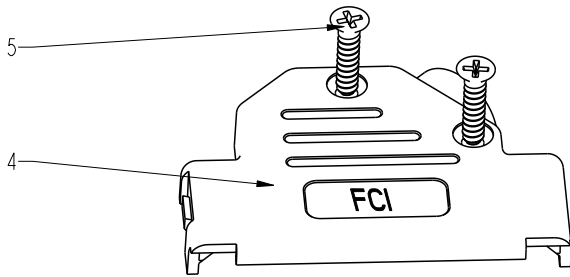

DESIGNATION	REP	09	15	25	37
COVER BOTTOM	1			1	
JACKSCREWS	2	1		2	
STRAIN RELIEF	3			2	
COVER TOP	4			1	
SCREWS POZIDRIVE	5			2	



Copyright FCI.

rev	ecn no	dr	date
A	LS05-0086	MPE	2005/10/05
B	LS06-0084	LGO	2006/06/20
C	LS07-0096	LGO	2007/04/04
-	-	-	-
-	-	-	-
-	-	-	-


www.fciconnect.com		surface -	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	BART.S	2005/10/17	ANGULAR	size A3	Scale 3:2
Eng	LENOIR.M	2005/10/17	LINEAR		
Chr	LEGARE.P	2005/10/17	0° ±2°		
Appr	LEGARE.P	2005/10/17	Product family	D-SUB	Spec ref
		D-SUB PLASTIC SHELLS		10061513C	Rev. C
		ANGLED			
		CUSTOMER		sheet 1 of 3	

SIZE	Part Num.	Threading
9	8655PHRA090ILF	UNC 4.40

SIZE	Part Num.	Threading
15	8655PHRA150ILF	UNC 4.40

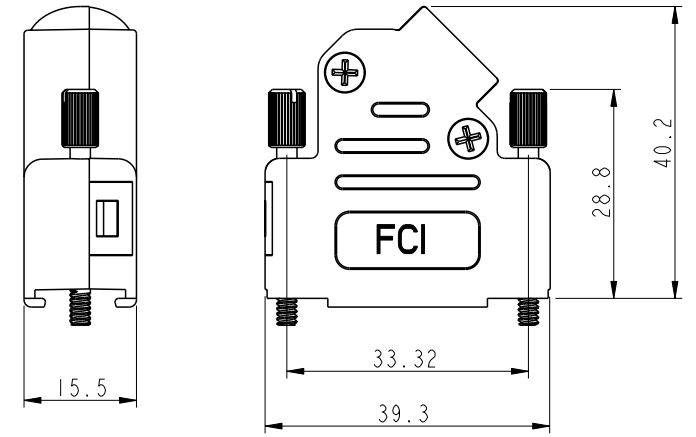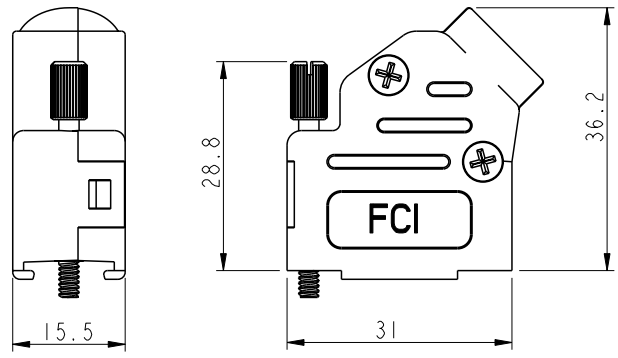

SIZE	Part Num.	Threading
37	8655PHRA370ILF	UNC 4.40

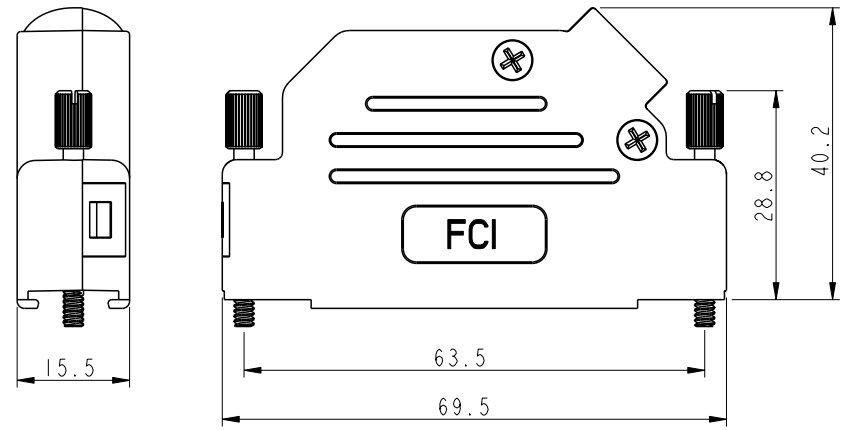


Copyright FCI

www.fciconnect.com		surface - <input checked="" type="checkbox"/>	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	BART.S	2005/10/17	ANGULAR	size	Scale
Eng	LENOIR.M	2005/10/17	LINEAR	A3	3:2
Chr	LEGARE.P	2005/10/17	0° ±2°	0.X ±0.3	ECN LS07-0096
				0.XX ±0.1	
				0.XXX ±0.05	
Appr	LEGARE.P	2005/10/17	Product family	D-SUB	Spec ref
	title D-SUB PLASTIC SHELLS			dwg no	10061513C
					Rev. C
				ANGLED	
				catalog no	CUSTOMER sheet 2 of 3


REV I - 2006-04-17

CABLING INSTRUCTIONS


1- Use two halves of strain relief different sizes can be mixed (Ø4,5,7 or 9)

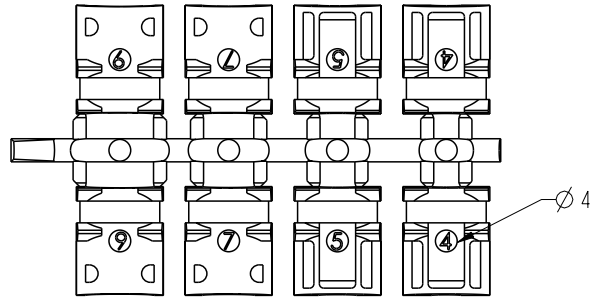


3- Mount connector and cable into the backshell

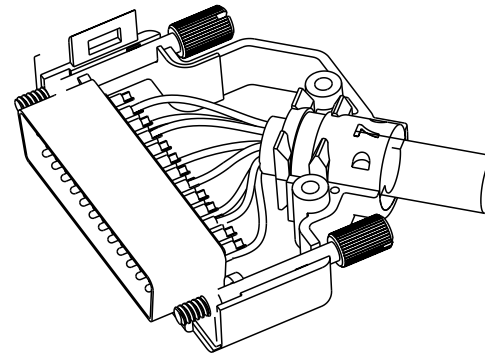

2- Attach the strain relief around the cable

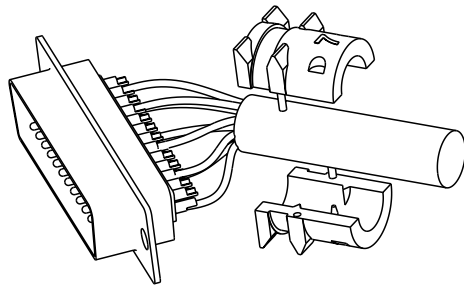

4- Assemble the other half screwing force: 100 Ncm

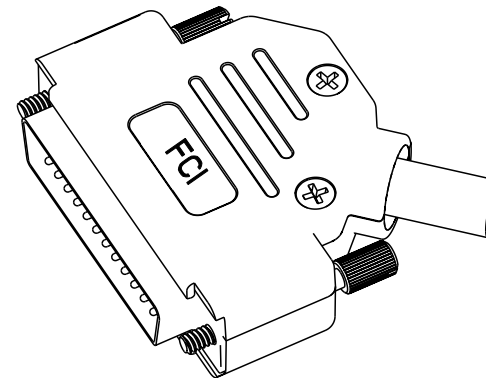

Copyright FCI.

www.fciconnect.com			surface - ✓ ISO 1302	tolerance std ISO 406 ISO 1101	projection mm		
			TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	BART.S	2005/10/17	ANGULAR	LINEAR	0.X ±0.3	size	Scale
Eng	LENOIR.M	2005/10/17			0.XX ±0.1	A3	3:2
Chr	LEGARE.P	2005/10/17	0° ±2°		0.XXX ±0.05	ECN	LS07-0096
Appr	LEGARE.P	2005/10/17	Product family		D-SUB	Spec ref	-
	title D-SUB PLASTIC SHELLS				dwg no	10061513C	
	ANGLED					Rev.	C
	catalog no				-	CUSTOMER	sheet 3 of 3

REV 1 - 2006-04-17