
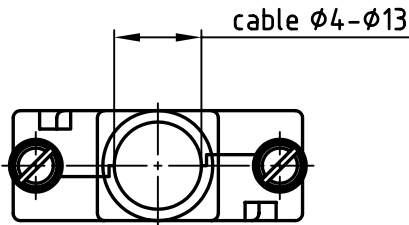
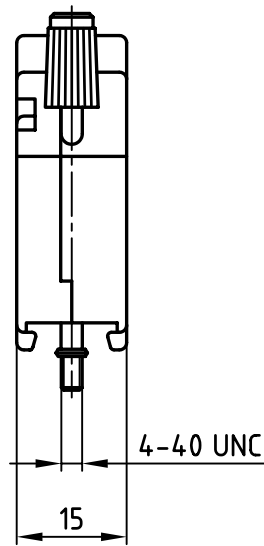


used for: D-SUB

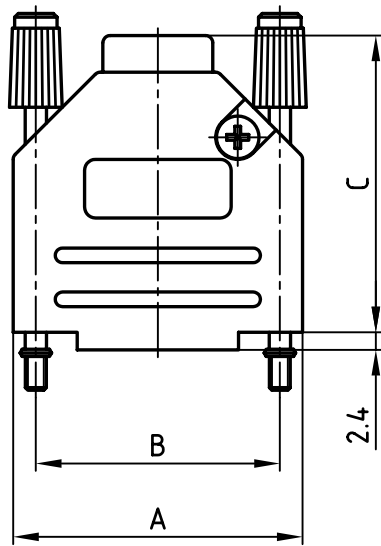

No. of pos.	A	B	C	Part NO.
9	31.0	25.0	38.3	165X02609XE
15	39.5	33.3	40.5	165X02619XE
25	53.4	47.0	47.3	165X02629XE
37	70.9	63.5	52.2	165X02639XE

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

Technical Data:

Material and finish: zinc die-cast, nickel plated
 Cable strain relief: steel fibre reinforced polycarbonate UL 94 V-0
 Temperature range: -40°C to +120°C
 Attenuation factor: > 40dB between 30 MHz and 1 GHz

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

tolerance		scale: 1:1	
2006	date	material: SEE NOTES	
drawn	09.02.	title:	
appd.	09.02.	METAL HOOD	
norm		9-37pos. EMI/RFI SHIELDING	
d-old		with straight cabel exit and jack screws	
a	Origin	dwg no:	AutoCAD 2004
rev.	description		16K1A1744
	date		DIN-A
	name		4
		part no:	SEE TABLE
			sh: 1/1

