THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REDRAWN PER EC 0S13-0148-04	08MAR05	TS	JG

1. MATERIAL:
   HERMAPHRODITIC BACKSHELL– STEEL.
   SPRING LATCH– STAINLESS STEEL.
   HERMAPHRODITIC SPRING LATCH COVER– UL 94V-0 RATED
   ABS MOLDING COMPOUND, COLOR–BLACK.
2. PLATING:
   HERMAPHRODITIC BACKSHELL– 5µm MIN BRIGHT NICKEL OVER
   2.5µm MIN COPPER.
3. RECOMMENDED WIRE: 30 AWG WITH A 0.56–0.64 INSULATION DIAMETER,
   WIRE MUST BE APPROVED BY AMP ENGINEERING.

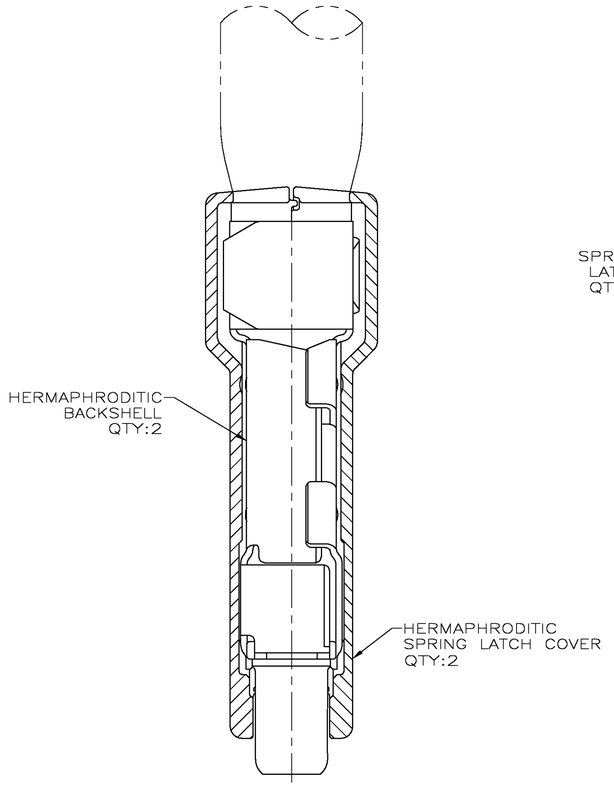

SECTION A–A

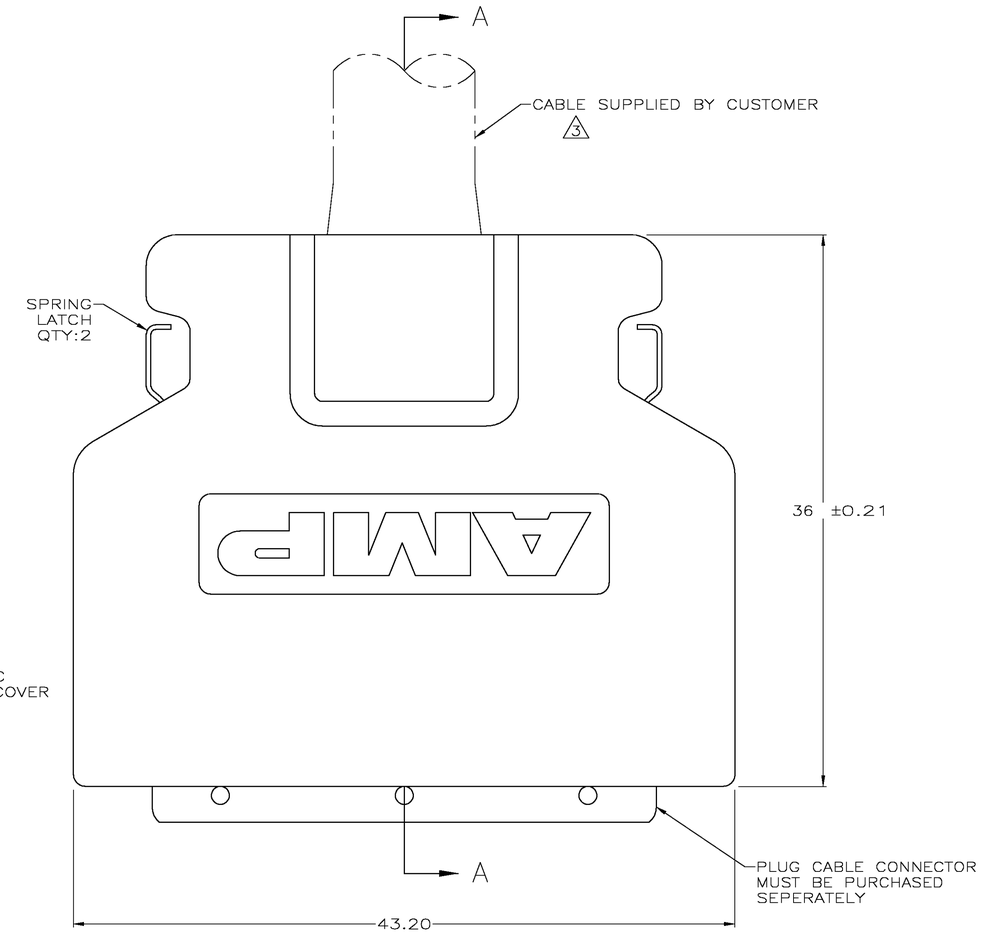

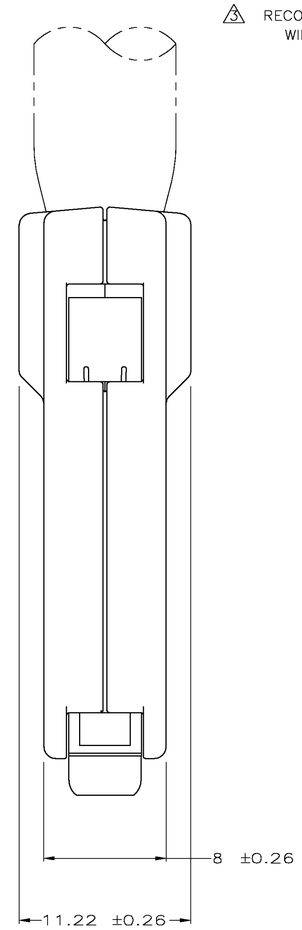

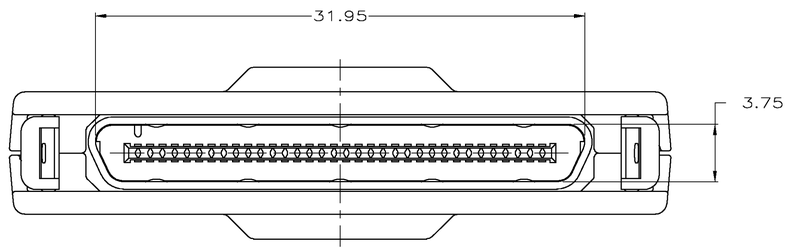

OBSOLETE	INDIVIDUAL KIT	787229–2
	BULK, 100 KITS	787229–1
	PACKAGING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1 | FINISH 2

DWN T. SHUEY 08MAR05
CHK J.GERACE 08MAR05
APVD M.WALMSLEY 08MAR05
PRODUCT SPEC 108–1471
APPLICATION SPEC –
WEIGHT –

Tyco Electronics Corporation
Harrisburg, Pa 17105–3608

NAME
BACKSHELL KIT,
SQUEEZE TO RELEASE, 68 POSITION,
CABLE CONNECTOR, 0.8mm, CHAMP

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-787229	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV C