


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DF	DO	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		ADD -2 PER 063D-0476-00	11-00	CT	DM

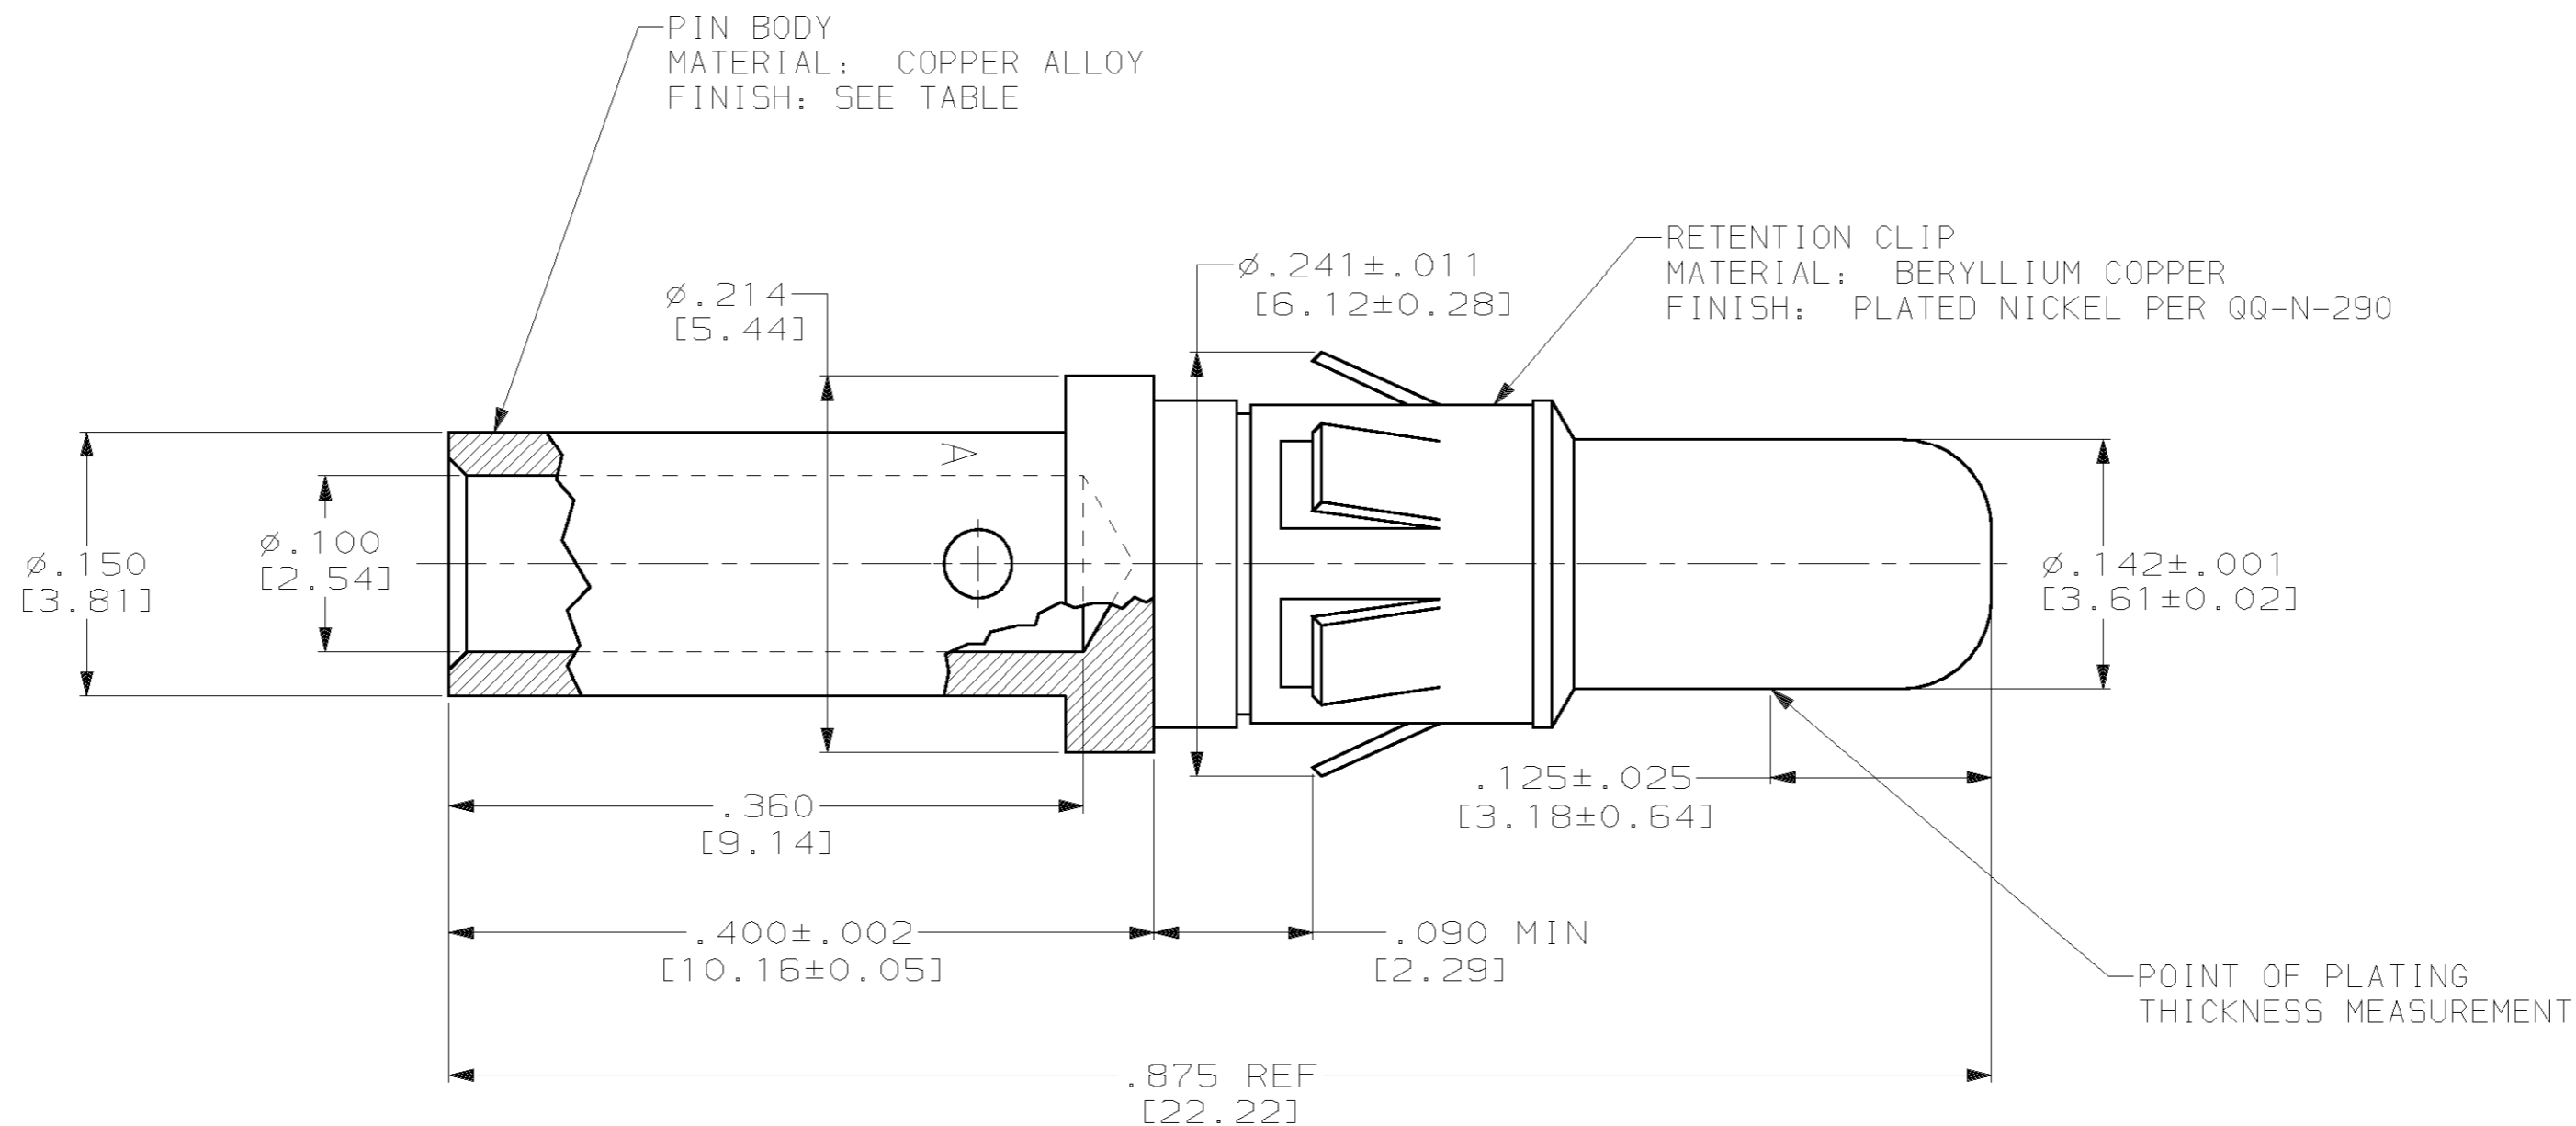

1. THIS PART CONFORMS TO REQUIREMENTS FOR DANIELS CRIMP TOOL NO. M300-BT, WITH DANIELS POSITIONER PART NO. SP689, STRIP LENGTH .375, SETTING 1.

2. WIRE BARREL WILL ACCEPT #12-#14 AWG WIRE.

3. MATES WITH 212008-1.

4 FINISH: PLATED GOLD .000050 [0.00127] MIN THK PER MIL-G-45204 OVER NICKEL .000050 [0.00127] MIN THK PER QQ-N-290.

5 FINISH: PLATED GOLD .000030 [0.00076] MIN THK PER MIL-G-45204 OVER NICKEL .000050 [0.00127] MIN THK PER QQ-N-290.

PRELIMINARY NOT RELEASED FOR PRODUCTION	5	1218483-2
	4	1218483-1
	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C. THOMAS 11/17/99	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES [mm]		CHK D. MILLER 11-18-99	AMP	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MILLER 11-18-99	ASSEMBLY, PIN CONTACT, POWER VIII, #12-14 AWG, BLINDMATE	
0 PLC ±-		PRODUCT SPEC	SIZE	CAGE CODE
1 PLC ±-		APPLICATION SPEC	A2	00779
2 PLC ±-		WEIGHT	DRAWING NO	RESTRICTED TO
3 PLC ±.005 [0.13]			C-1218483	
4 PLC ±-		CUSTOMER DRAWING	SCALE	SHEET
ANGLES ±-			10:1	1 OF 1
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS		REV
				A