DESCRIPTION: FEMALE CONTACT STAMPED 20-28 AWG

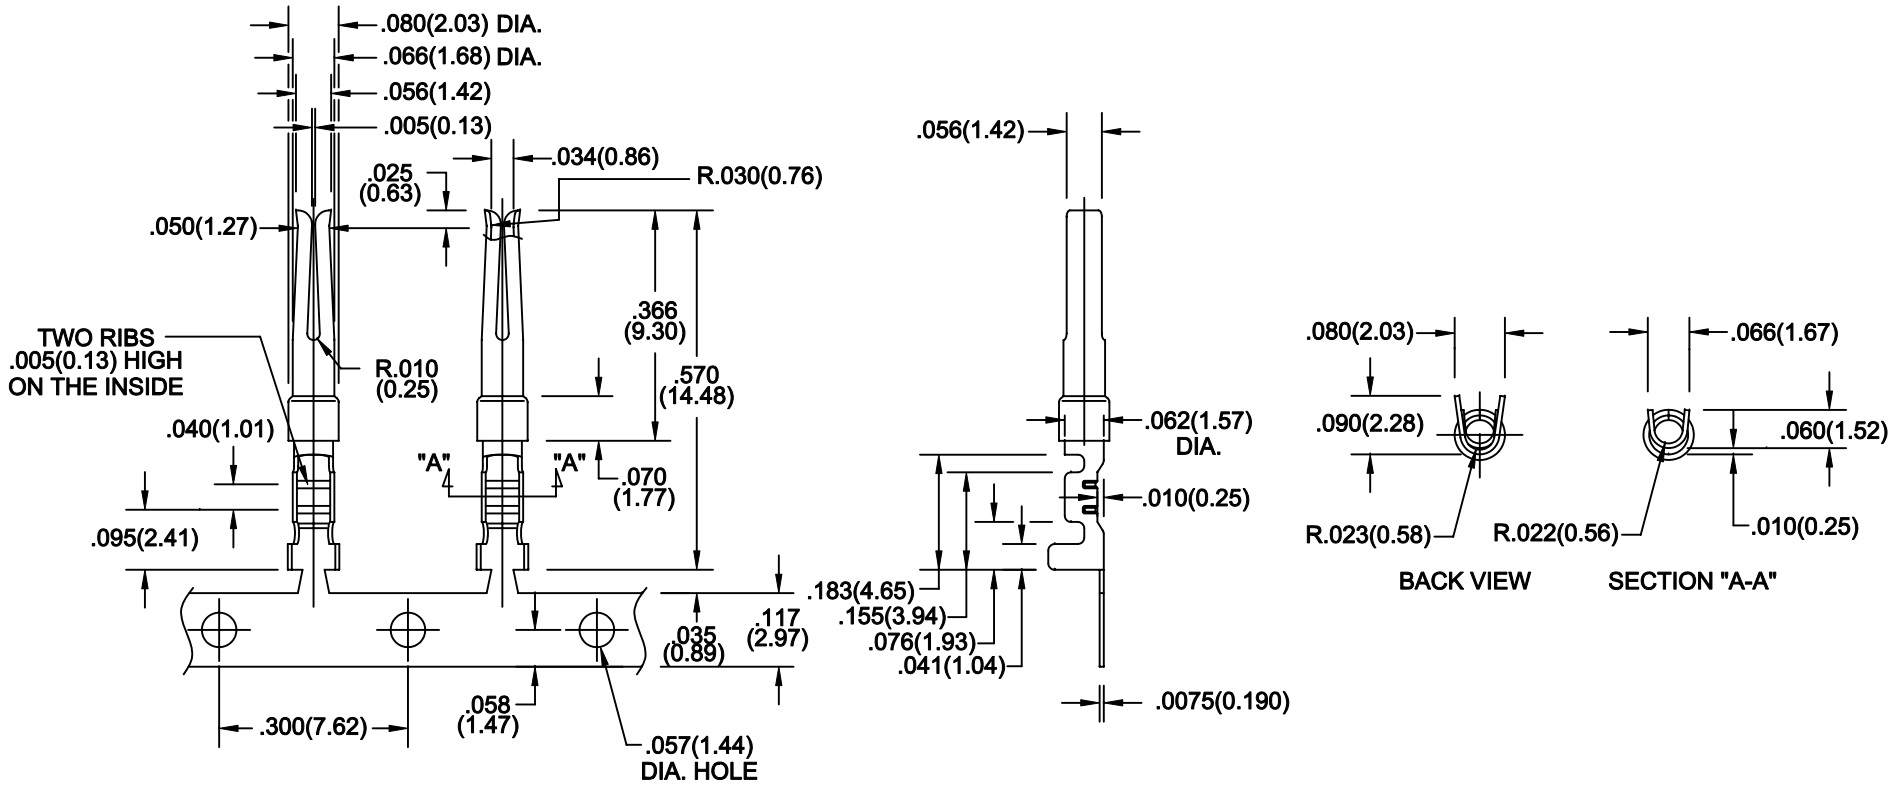

CONTACTS TO FEED OFF REEL IN THIS DIRECTION.

170-002-170-001 = G/F IN MATING AREA, 50 u" NICKEL IN WIRE CRIMP
170-002-170-002 = 10 u" OVER 50 u" NICKEL
170-002-170-003 = 30 u" OVER 50 u" NICKEL

MATERIAL: PHOSHOR BRONZE .0075(0.190) ALLOY 510, 1/2 HARD
GOLD PLATED INSIDE .075(1.90) MIN. FROM TOP
TIN PLATED ON CRIMP AREAS OVER NICKEL

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS	DATE: 4-15-03		
CHECKED:	DATE:		
SCALE:	SHEET 1 OF 1	REV 0	
DWG NO. 170-002-170-00X			

NorComp