


- NOTES:
- 1-Material:phosphor bronze,thickness 0.20
 - 2-Finish on contact area:see table
finish on termination:bright tin lead over nickel
 - 3-Wire range:20 to 24 AWG
 - 4-Max outer dia of wire insulator:1.73 mm
 - 5-Current carrying capacity per contact:
5.Amps max when crimped to #20 AWG
5 Amps max when crimped to #22 AWG
3 Amps max when crimped to #24 AWG
 - 6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
 - 7-When contact is crimped to 20 AWG,the insulation
support crimped height must be 1.78 mm max to ensure
a proper insertion into housing
 - 6-Packaging:Reel of 400 contacts

NOTE : ROHS INFORMATIONS
 The LF products meet European union directives and other
 country regulations as described in GS-22-008
 Terminations plating spec : 2um Nickel min + 2um Sn min
 Packaging Spec : see GS-14-920

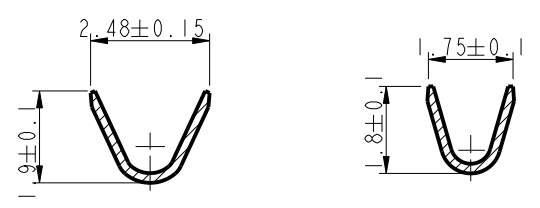

PULL PART	-
86563006064LF	Flash Au
86563006064	Flash Au
PART NUMBER	Plating

Copyright FCI. FCI

www.fciconnect.com		surface -	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	C JARRY	28/01/97	ANGULAR	0.X ±0.3	size A3
Eng			LINEAR	0.XX ±0.1	Scale 10:1
Chr			0° ±2°	0.XXX ±0.05	ECN LS08-0127
Appr			Product family	-	Spec ref
FCI		CRIMP SOCKET			Rev. no
		# Wire 20-24 Ø1.52 MAX			C01-8656-1504
		catalog no			customer
					sheet 1 of 1

REV I - 2006-04-17