


NOTES:

- 1-Material:phosphor bronze,thickness 0.20
- 2-Finish on contact area:see table
finish on termination:bright tin lead over nickel
- 3-Wire range:20 to 24 AWG
- 4-Max outer dia of wire insulator:1.73 mm
- 5-Current carrying capacity per contact:
5.Amps max when crimped to #20 AWG
5 Amps max when crimped to #22 AWG
3 Amps max when crimped to #24 AWG
- 6-After 5 insertions into connector,
contact retention must be 5 pounds axial load min
- 7-When contact is crimped to 20 AWG,the insulation
support crimped height must be 1.78 mm max to ensure
a proper insertion into housing
- 6-Packaging:Reel of 400 contacts

NOTE : ROHS INFORMATIONS

The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

PULL PART	
86563006067LF	0.76μ Au
86563006067	0.76μ Au
86563006065LF	0.76μ Au
86563006065	0.76μ Au
PART NUMBER	Plating

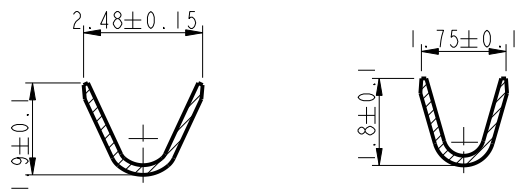

www.fciconnect.com		surface - ✓	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	C JARRY	28/01/97	ANGULAR	size A3	Scale 10:1
Eng			LINEAR	ECN	LS08-0127
Chr			0° ±2°	Product family	Spec ref
Appr			0.X ±0.3		
			0.XX ±0.1		
			0.XXX ±0.05		
		CRIMP SOCKET		AWG no	Rev.
		# Wire 20-24 Ø1.52 MAX		C01-8656-1532	D
		catalog no		CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
C	LS06-196	MPE	27/11/2006
D	LS08-0127	MPE	2008/05/13
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI.

REV I - 2006-04-17