


NOTES:

- 1-Material:phosphor bronze,thickness 0.20
- 2-Finish on contact area:see table  
finish on termination:bright tin lead over nickel
- 3-Wire range:24 to 28 AWG
- 4-Max outer dia of wire insulator:1.02 mm
- 5-Current carrying capacity per contact:
  - 3.Amps max when crimped to #24 AWG
  - 2 Amps max when crimped to #26 AWG
  - 1 Amps max when crimped to #28 AWG
- 6-After 5 insertions into connector,  
contact retention must be 5 pounds axial load min
- 7-When contact is crimped to 24 AWG,the insulation  
support crimped height must be 1.78 mm max to ensure  
a proper insertion into housing
- 6-Packaging:BOX of 500 contacts

NOTE : ROHS INFORMATIONS

The LF products meet European union directives and other  
country regulations as described in GS-22-008  
Terminations plating spec : 2um Nickel min + 2um Sn min  
Packaging Spec : see GS-14-920

CORE RANGE	
<b>8656351067LF</b>	0.4µ Au
<b>8656351067</b>	0.4µ Au
<b>8656351065LF</b>	0.76µ Au
<b>8656351065</b>	0.76µ Au
<b>8656351066LF</b>	1.25 Au
<b>8656351066</b>	1.25µ Au
PART NUMBER	Plating

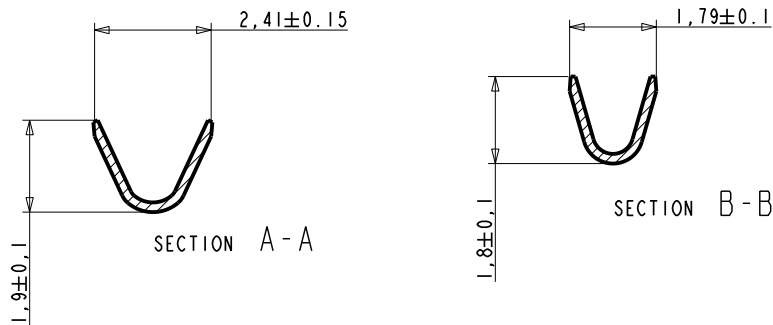

Copyright FCI.

rev	ecn no	dr	date
B	LS05-006	MPE	25-06-05
C	LS06-0196	MPE	27/11/2006
D	LS08-0127	MPE	2008/05/13
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface - <input checked="" type="checkbox"/> ISO 1302	tolerance std <input checked="" type="checkbox"/> ISO 406 ISO 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	C JARRY	28/01/97	ANGULAR	LINEAR	size A3 Scale 10/1
Eng			0°	0.X ±0.3	ECN LS08-0127
Chr			±2°	0.XX ±0.1	
Appr				0.XXX ±0.05	
Product family				Spec ref	
FCI			title CRIMP SOCKET		Rev. D
			# Wire 20-24 Ø1.52 MAX		dwg no C01-8656-1533
catalog no			CUSTOMER		sheet 1 of 1

REV I - 2006-04-17