
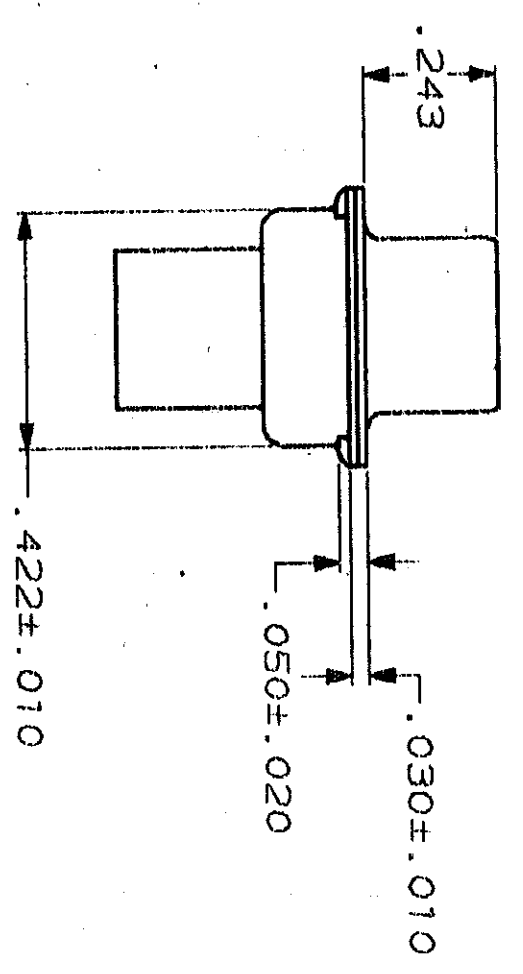
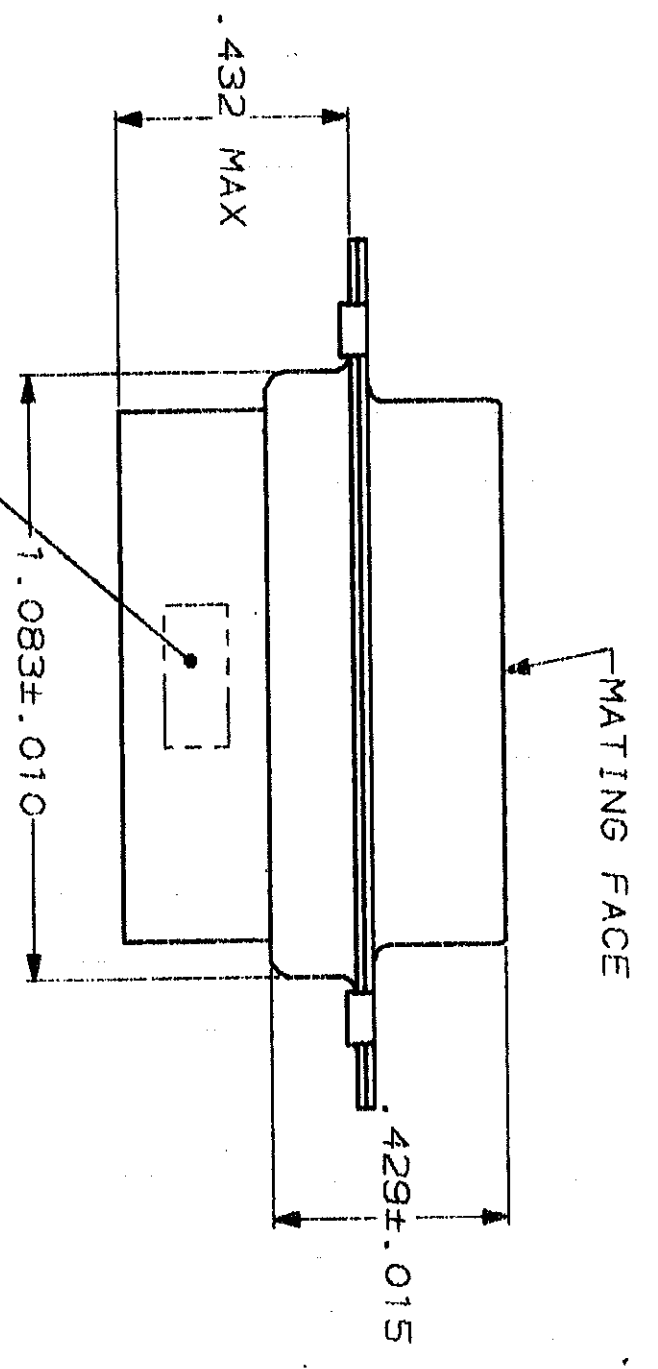


LOC	DIST	ZONE	LTR	REVISIONS	DATE	APPD
BD	39			REL WAS 87-4870-14		

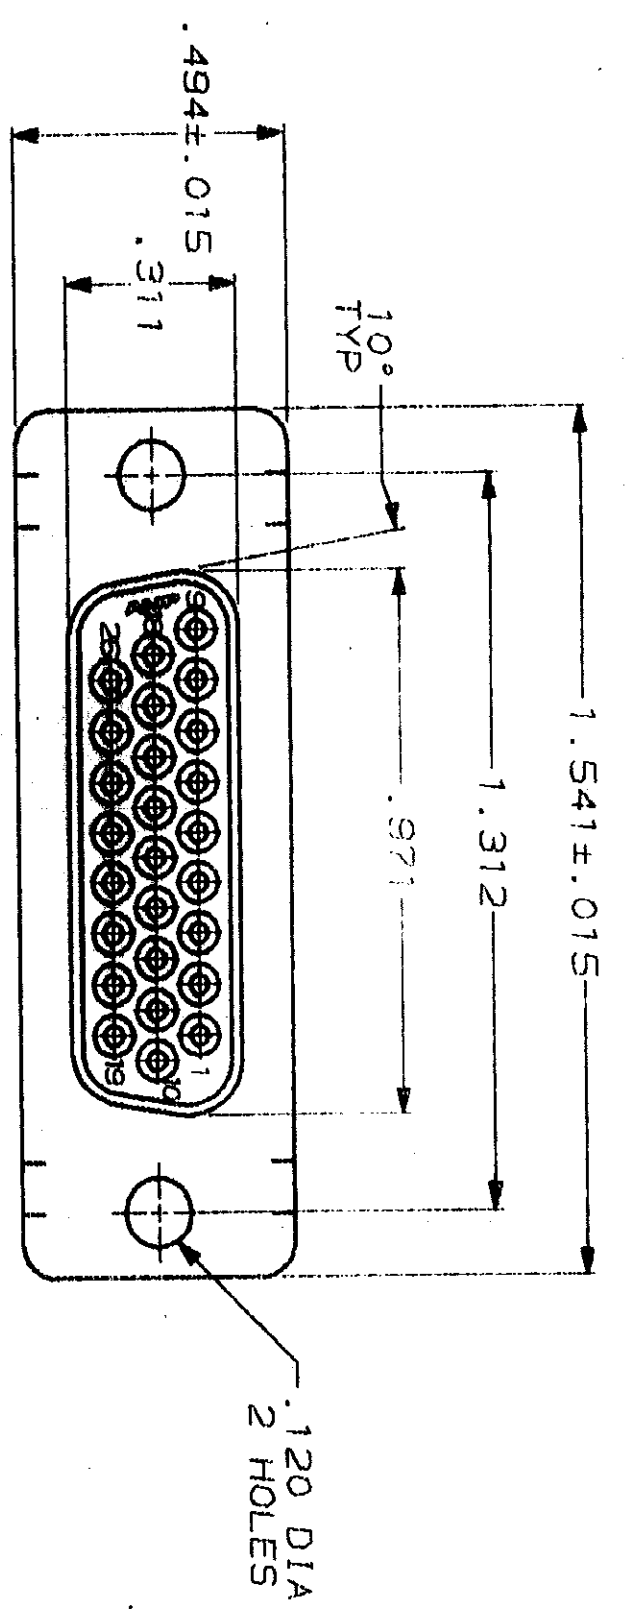

1. CONNECTOR ACCEPTS SIZE 22 DF SOCKET CONTACTS, RETENTION TINNES ARE AN INTEGRAL PART OF INSERT.
2. FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
3. STEEL PER ASTM A109.
4. TIN PLATED PER MIL-T-10727.

AMP, PART NO & DATE CODE, MARKED IN AREA INDICATED, ON FAR SIDE

DO NOT SCALE PRINT.
 UNLESS SPECIFIED
 DIMENSIONS IN INCHES
 TOLERANCES ON:
 1. PLC DEC ± .005
 2. PLC DEC ± .005
 3. PLC DEC ± .005
 ANGLES
 MATERIAL
 MOLDED PARTS: Δ
 SHELLS: Δ

DR: *J. P. ...* 1/12/88
 CHK: *H.G. ...* 1-14-88
 APPD: *J. ...* 1/14/88
 PRODUCT SPEC

AMP INCORPORATED
 RECEPTACLE CONNECTOR, SIZE 2, 26 POSN,
 AMPLIMITED® HDP-22

FINISH SHELLS: Δ	APPLICATION SPEC	SCALE	SIZE	FSCH NO	DRAWING NO
		3:1	C	00779	748566
					SHEET 1 OF 1

748566-1
 PART NO

748566

CUSTOMER DRAWING