

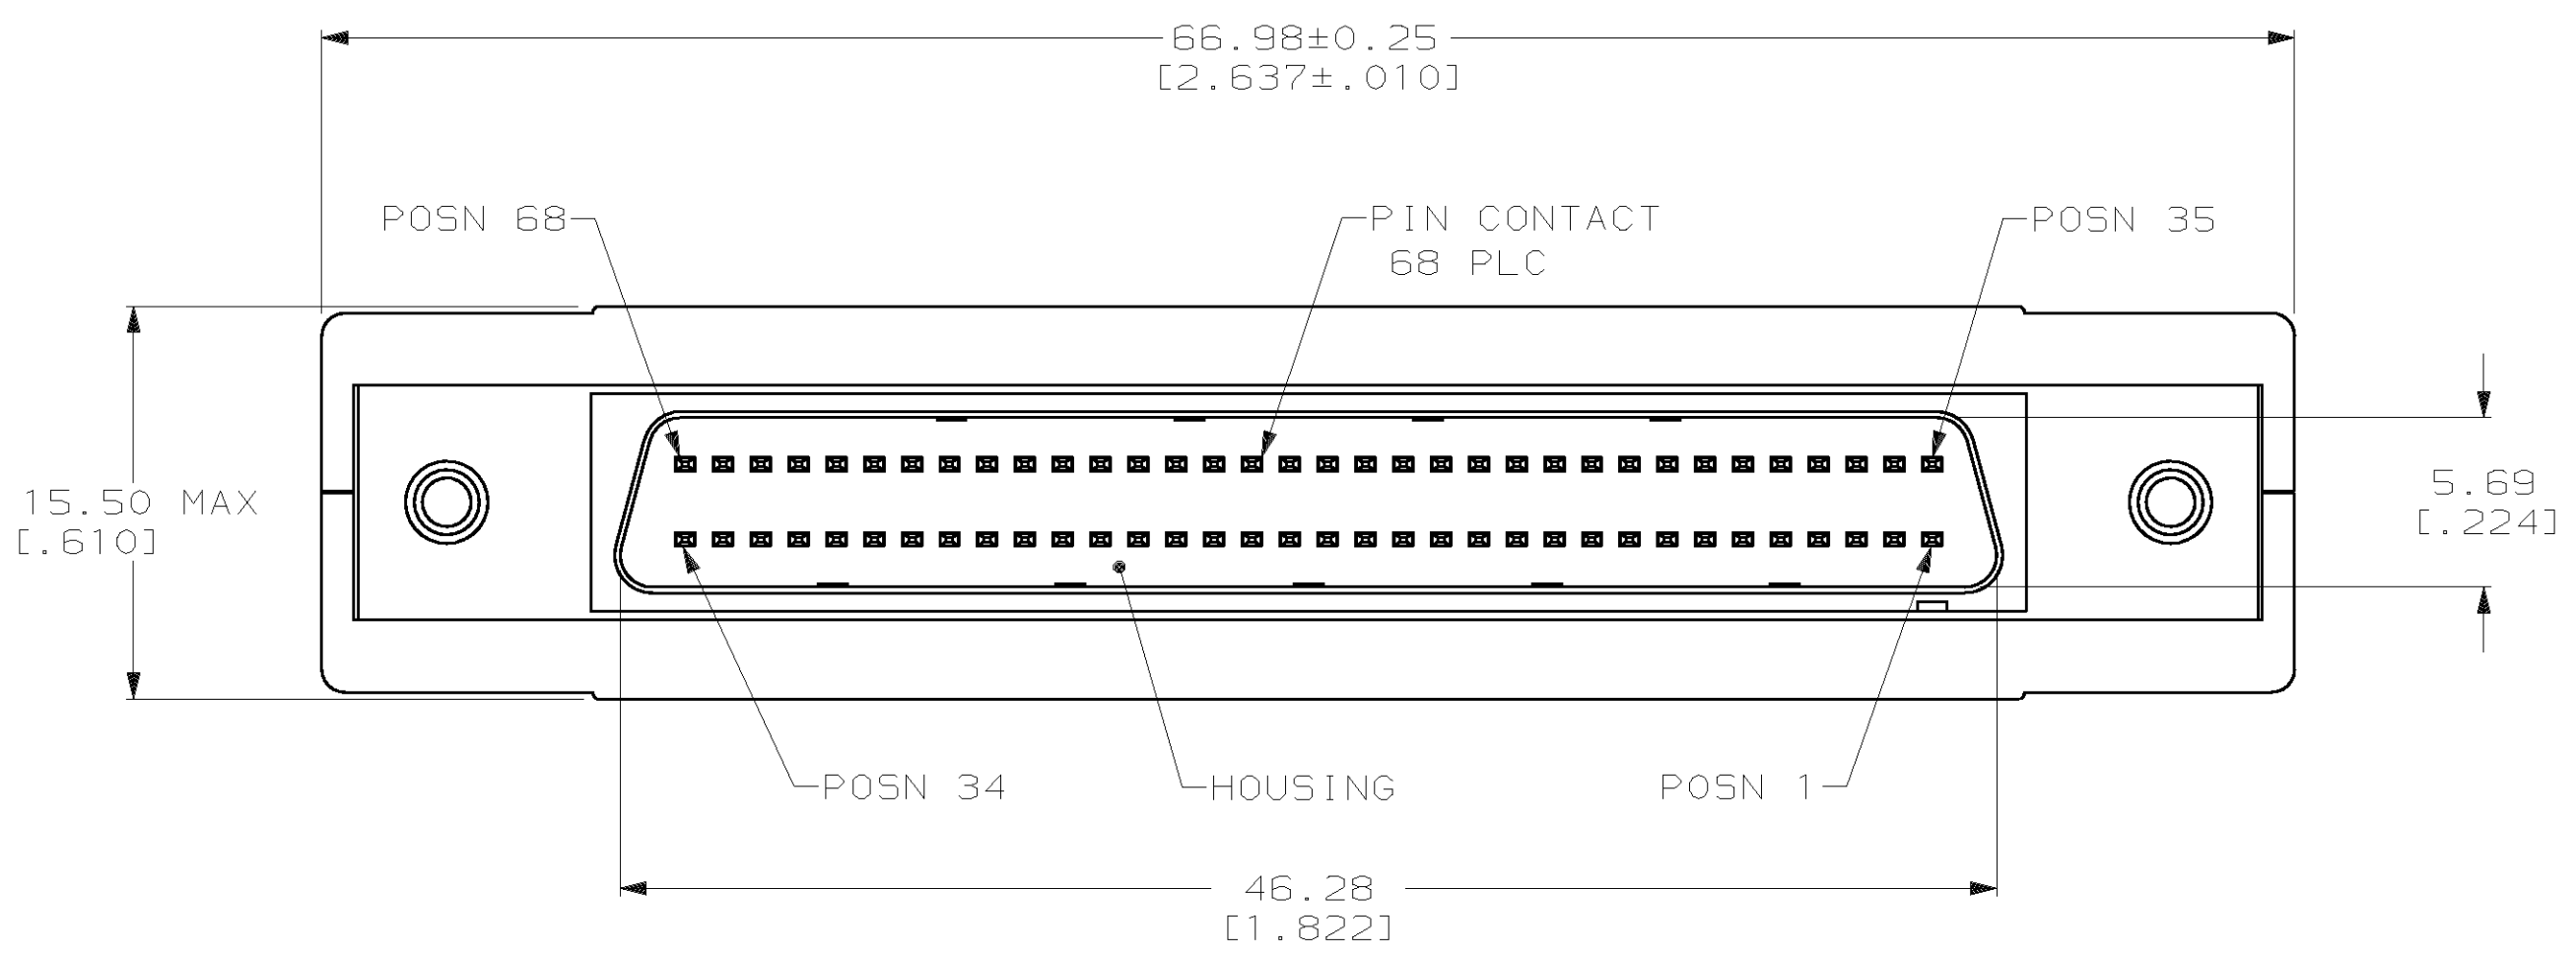
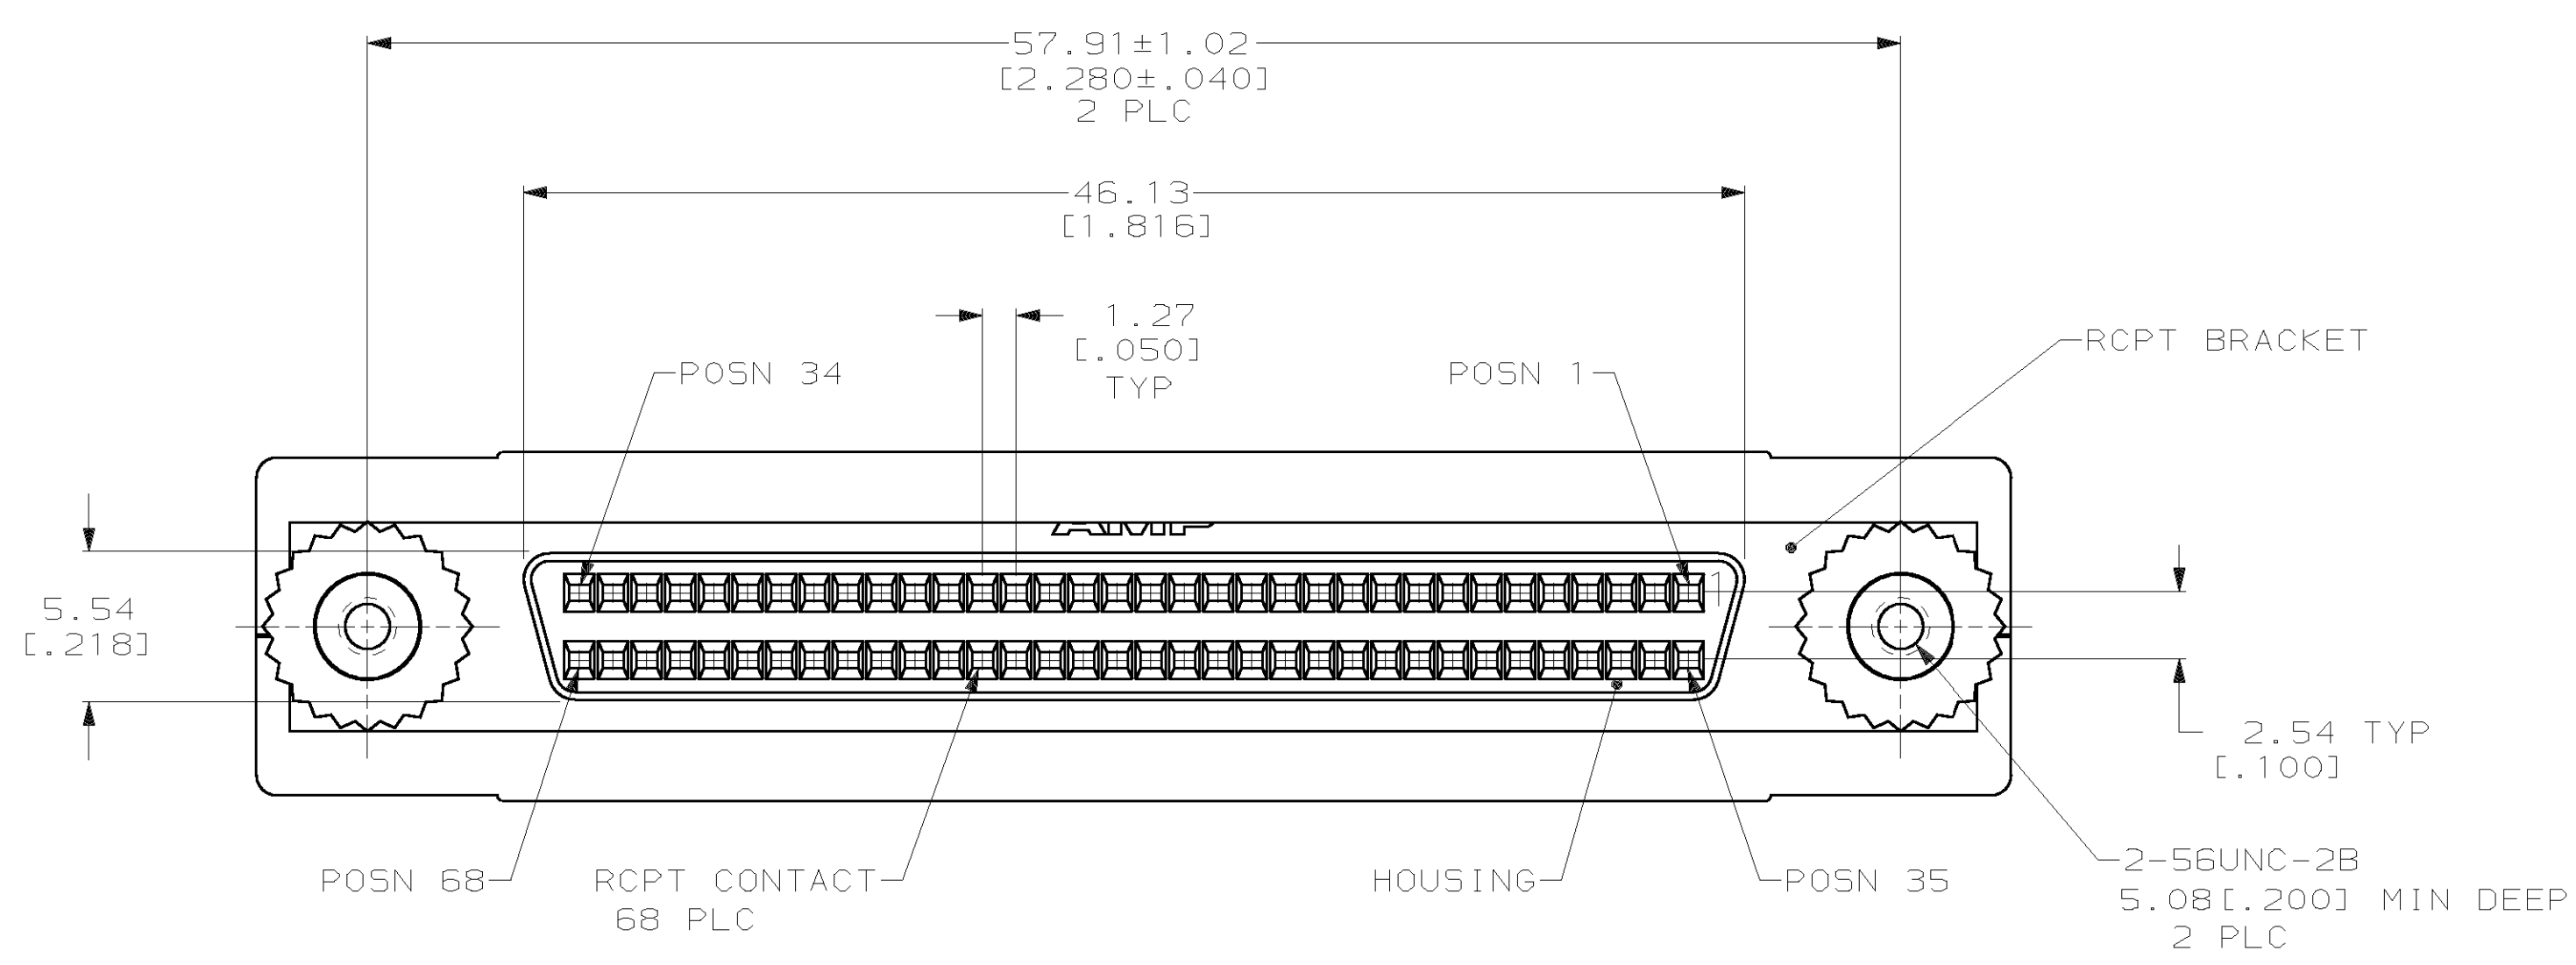


LOC		DIST		P		F		ZONE		LTR		REVISIONS			
BD	62											DESCRIPTION	DATE	APPD	
												G	REVISED PER EC 051A-0043-99	23AUG93	JG

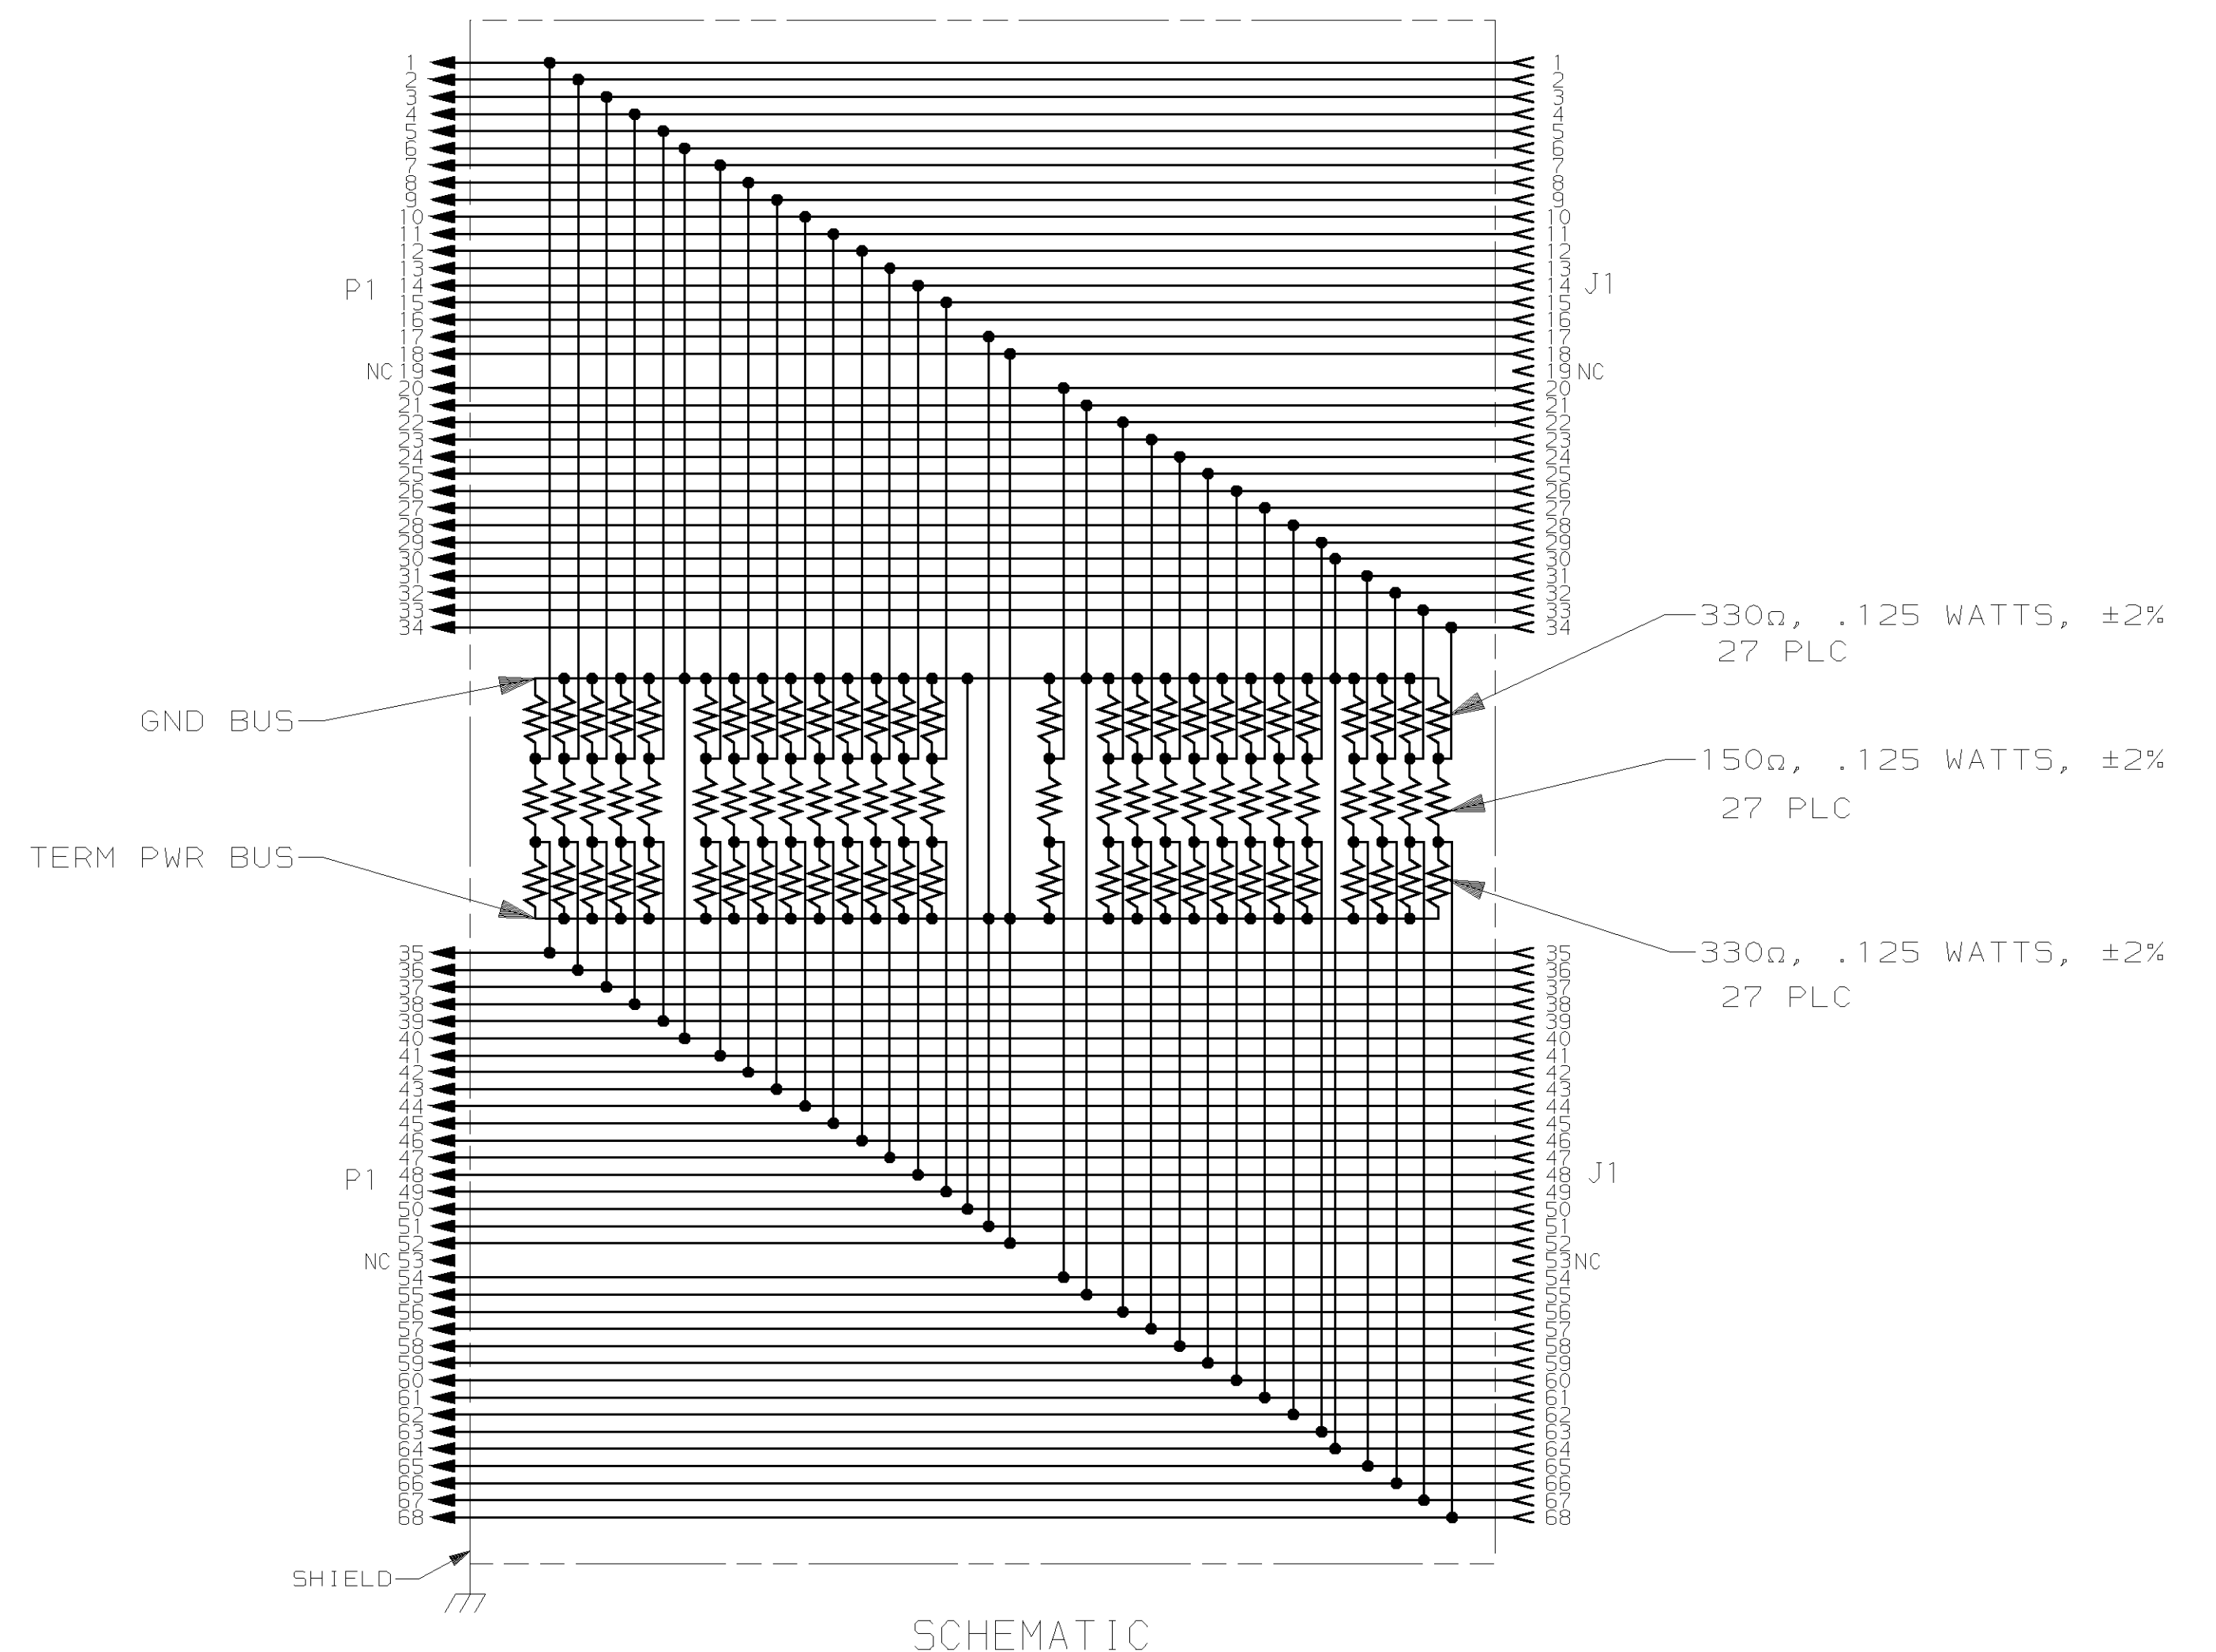

- 1 JACKSCREW BODIES: STAINLESS STEEL; SHELL AND SCREWS: CARBON STEEL; CONTACTS: PHOSPHOR BRONZE; HOUSINGS: POLYESTER, BLACK; SHIELD: COPPER; COVER: ABS, GREY, UL 94V-0; JACKSCREW HEADS: PVC, BEIGE; BRACKETS: ZINC; FLEX FILM CIRCUIT: COPPER ON KAPTON.
- 2 PASSIVATED.
- 3 5.08µm[.000200] MIN TIN OR TIN-LEAD OVER 1.27µm[.000050] MIN COPPER.
- 4 PIN CONTACTS: 0.76µm[.000030] MIN GOLD FOR A LENGTH OF 3.35[.132] MIN FROM MATING END OVER 1.27µm[.000050] MIN NICKEL; RECEPTACLE CONTACTS: 0.76µm[.000030] MIN GOLD FOR A LENGTH OF 0.64[.025] MIN, 0.13[.005] MAX FROM MATING END OVER 1.27µm[.000050] MIN NICKEL.
- 5 76.20µm[.003000] MIN CARBONITRIDE TEMPER.
- 6 3.81µm[.000150] MIN NICKEL OVER 5.08µm[.000200] MIN COPPER.

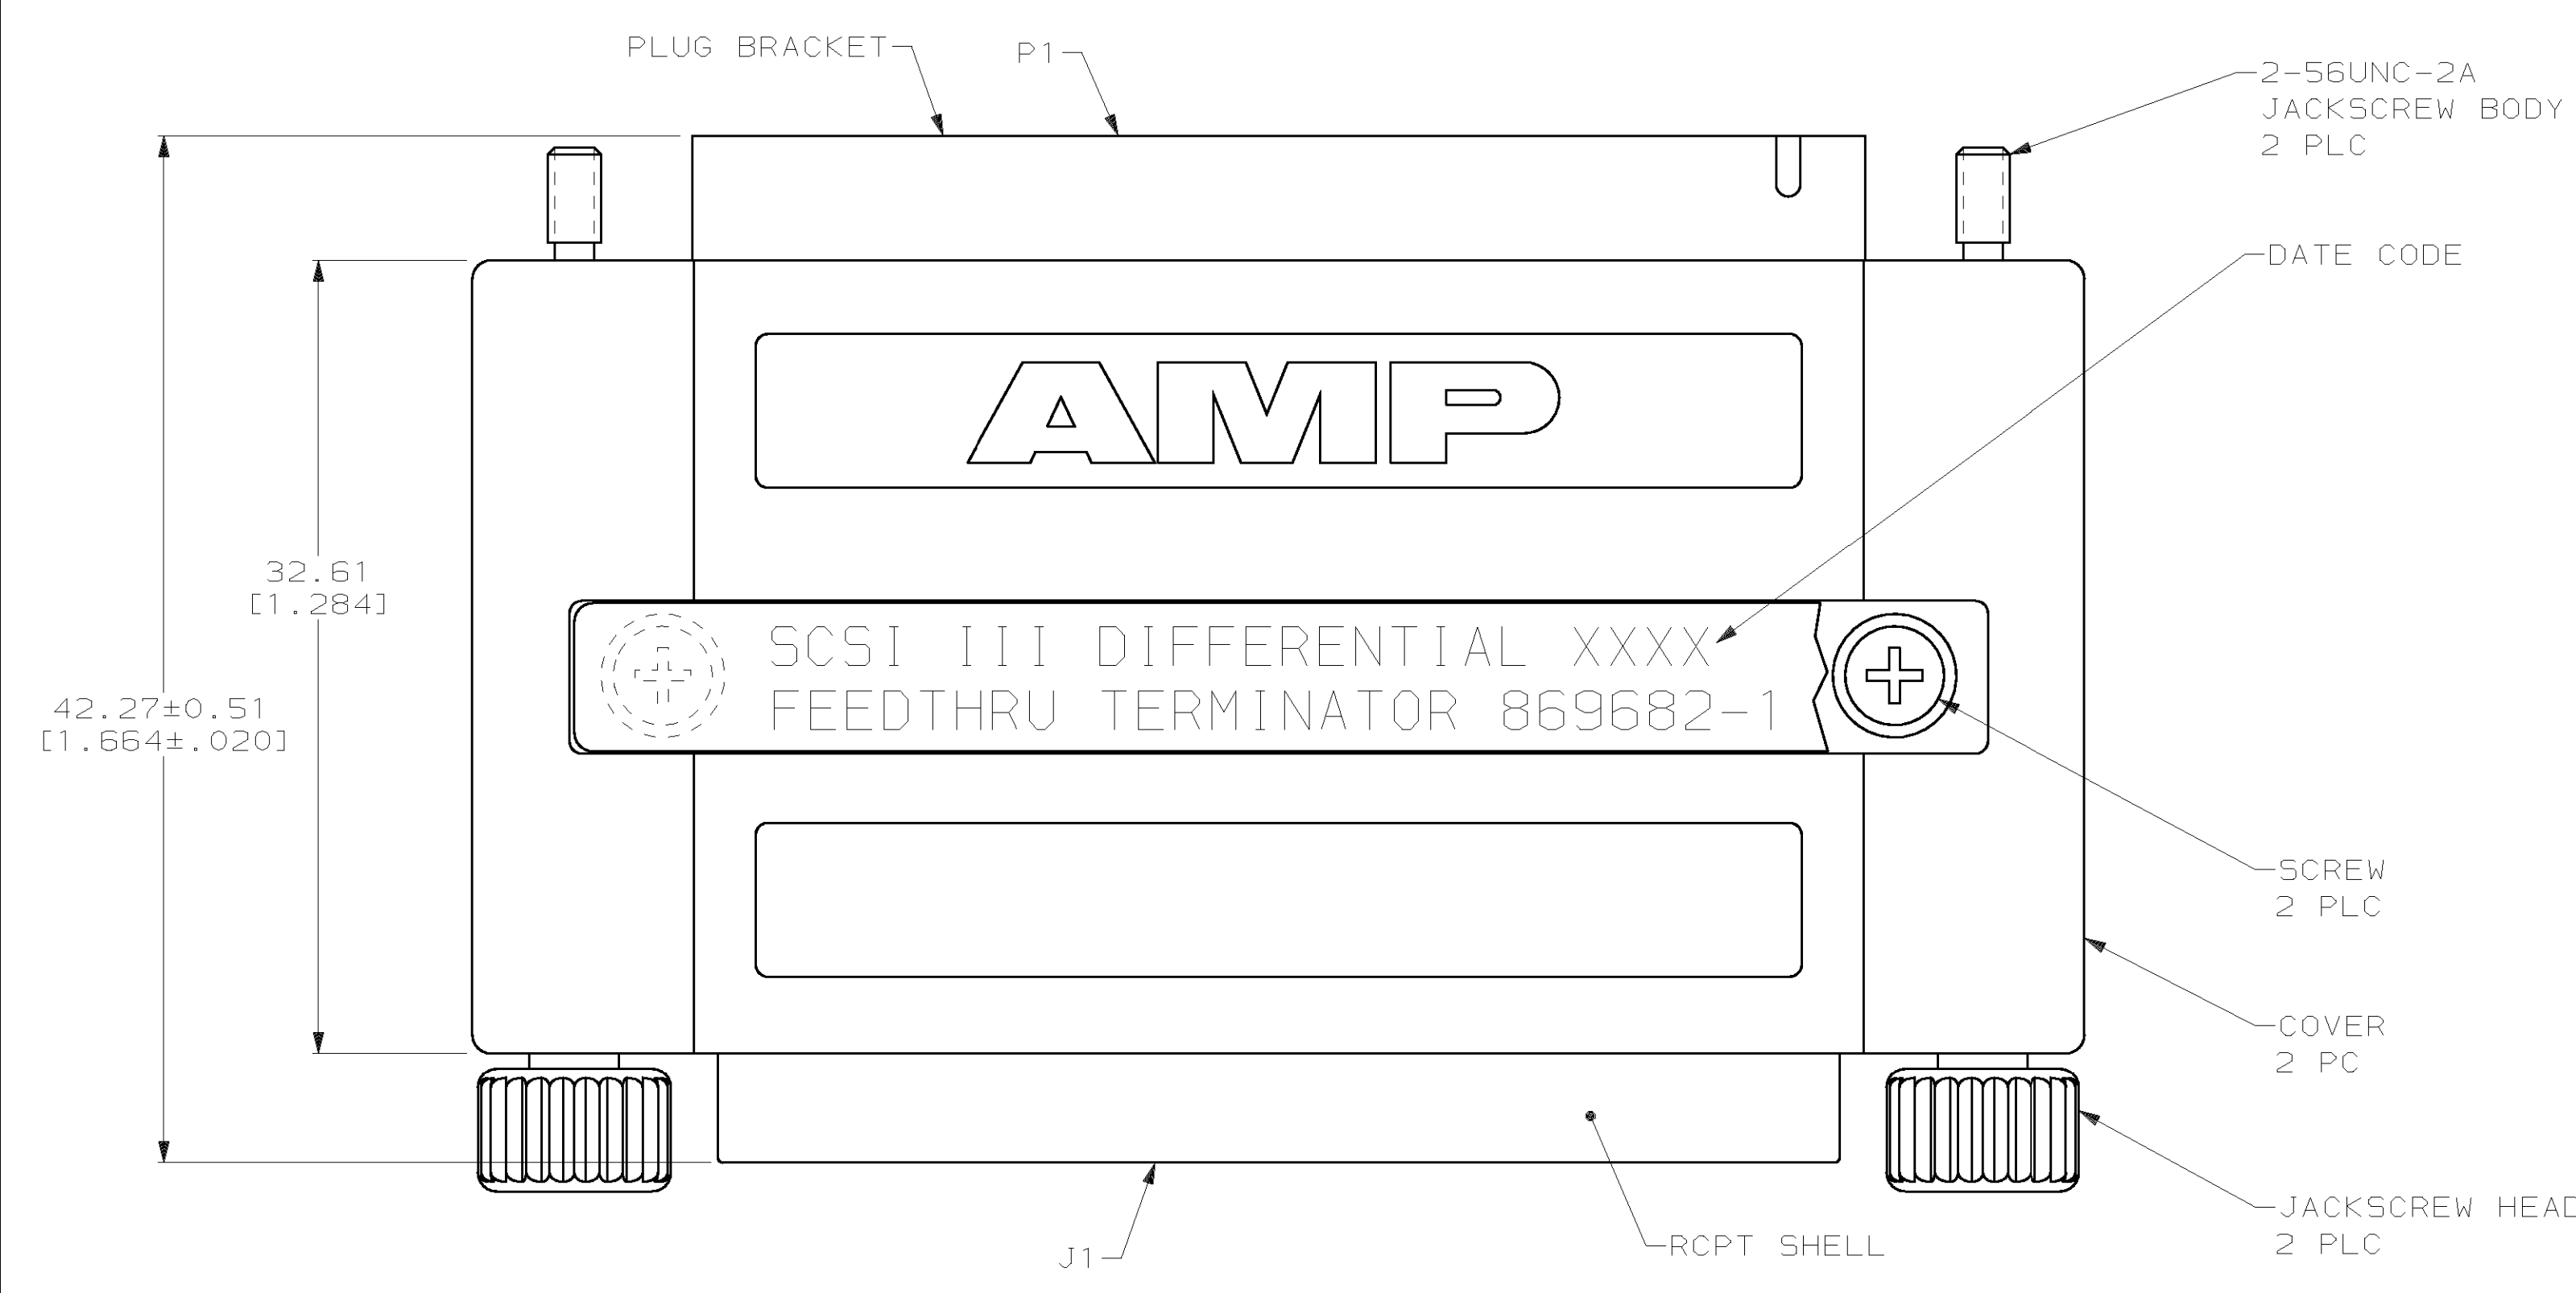

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± 0.13[.005] ANGLES ± -		DR 2-1-93 J.McCLINTON	869682-1 PART NO	
MATERIAL	FINISH SHELL: 3 CONTACTS: 4 SCREWS: 5 BRACKETS: 6 JACKSCREW BODIES: 7	CHK 2-10-93 R.STONE	AMP Incorporated Harrisburg, PA 17105-3608	
PRODUCT SPEC	APPLICATION SPEC	APPD 2-15-93 W.D.FLESHMAN	NAME ADAPTER ASSEMBLY, FEEDTHRU, DIFFERENTIAL, SCSI III, .050 SERIES AMPLIMITE™, TERMINATOR	
SIZE D	CAGE CODE 00779	APPD 2-15-93 W.D.FLESHMAN	DRAWING NO C-869682	
SCALE 4:1	WEIGHT -	SHEET 1 OF 1		

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.