
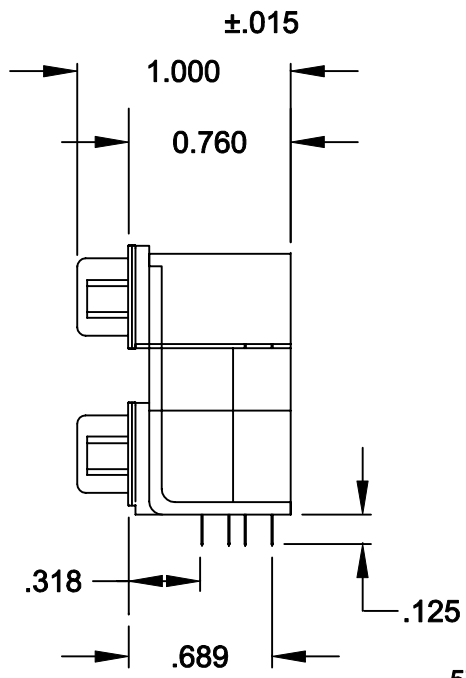


DESCRIPTION: .625 CENTER DUAL PORT D-SUB FEMALE/FEMALE

| | A | B | C |
|----|---------------|---------------|---------------|
| 9 | 1.204 30.6 | .984 25.0 | .494 12.55 |
| 15 | 1.535 39.0 | 1.312 33.3 | .494 12.55 |
| 25 | 2.078 52.8 | 1.850 47.0 | .494 12.55 |
| 37 | 2.724 69.2 | 2.500 63.5 | .494 12.55 |

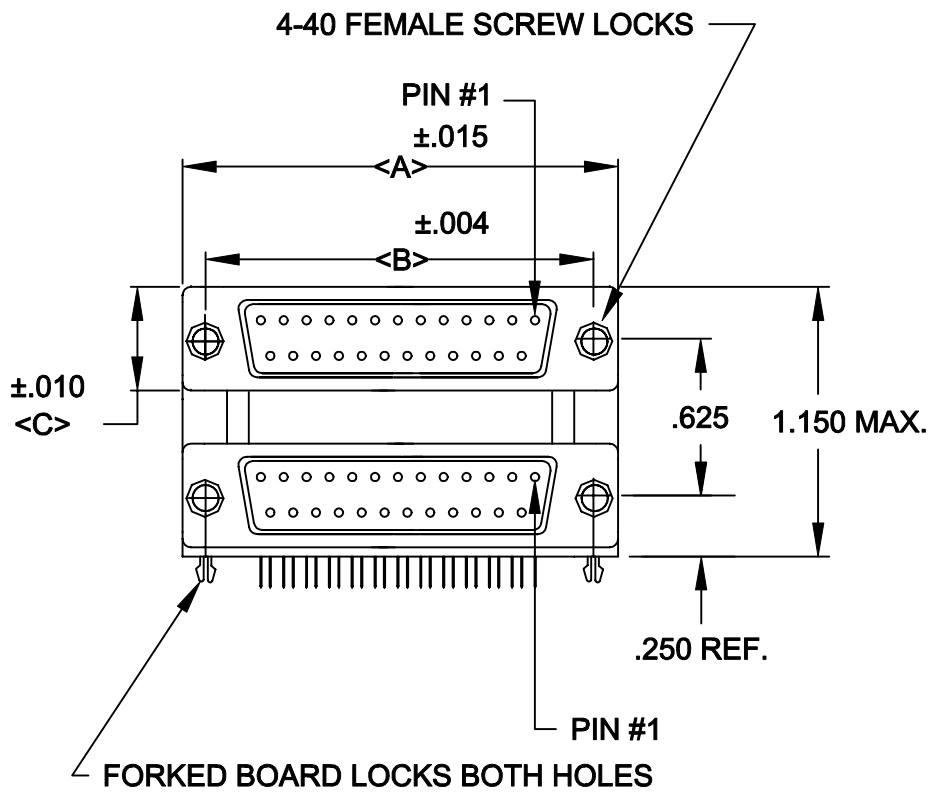

189-XXX-512-571

SERIES _____

POSITIONS _____

009
015
025
037

GENDER _____

61 = MALE OVER MALE
41 = MALE OVER FEMALE
51 = FEMALE OVER FEMALE
31 = FEMALE OVER MALE

SHELL PLATING _____

2 = TIN

HARDWARE OPTIONS _____

57 = 4-40 STANDOFFS/FORK BAORD LOCKS

PLATING OPTIONS _____

01 = GOLD FLASH


SPECIFICATIONS:

MATERIALS:

- SHELL: STEEL, TIN PLATED
- INSULATOR: UL 94V-0 RATED BLACK GLASS-FILLED POLYESTER
- CONTACTS: BRASS - GOLD FLASH IN MATING AREA
- TIN/LEAD ON SOLDER TAILS

ELECTRICALS:

- CURRENT RATING: 5 AMPS
- DIELECTRIC STRENGTH: 1000V AC RMS
- INSULTOR RESISTANCE: 1000 MOHMS MIN
- TEMPERATURE: -55°C TO +105°C

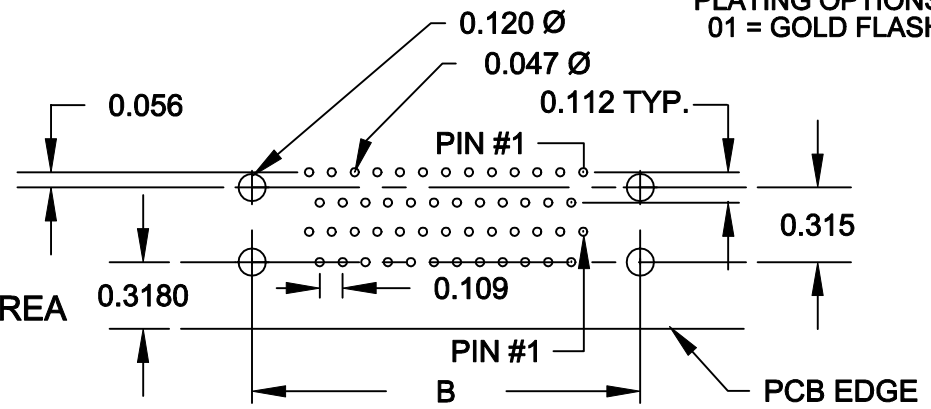

| | | | | |
|----------------|---|--------------------------------|------------------------------|-------------------------|
| | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | DRAWN: PAM JENKINS | DATE: 9-24-98 |
| | | | CHECKED: | DATE: |
| NorComp | | SCALE: 1:1 | SHEET 1 OF 1 | REV 5 |
| | | DWG NO. 189-XXX-512-571 | | |