used for: D-SUB COMBINATION

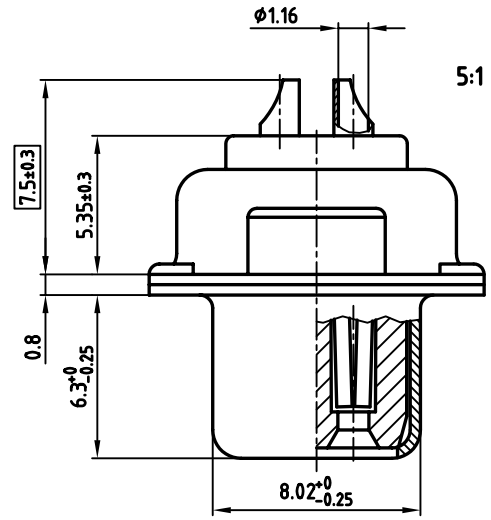

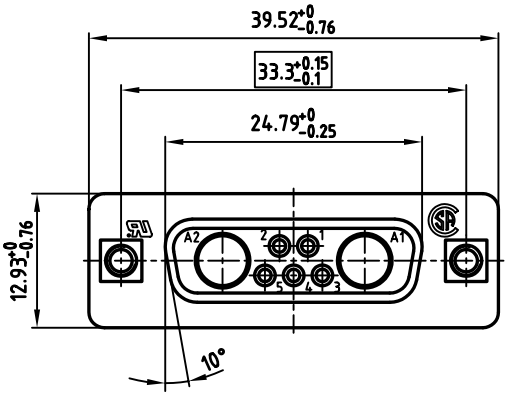

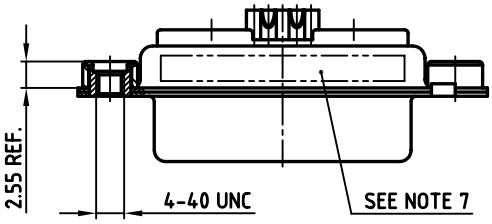



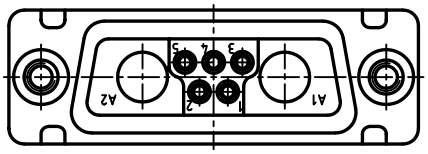

NOTES:

1. METALSHELLS: STEEL; min. 320 µ" TIN
2. INSULATORS: PBT GF, UL 94 V-0; GREEN
3. CONTACTS: COPPER ALLOY
   PLATING: MIN. 30µ" HARD GOLD OVER MIN. 50µ" NICKEL
   SOLDER CUP ACCEPTS CABLE AWG 20
4. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
7. CONNECTOR IS PART MARKED: 3007W2SCM99A30X CONEC Y/WW
8. [ ] = CRITICAL DIMENSION

Directive 2002/95/EC „RoHS" Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

	date	name
2002	date	name
drawn	11.11.	Parei
appd.	11.11.	Kühle
norm		
d-old		

scale: 2:1 (5:1)
material: SEE NOTES

title:
D-SUB COMBINATION FEMALE
7W2S SOLDER CUP
with threaded insert

dwg no: 13K2A691
AutoCAD 2000 | DIN-A 3 | sh: 1/1

part no: 3007W2SCM99A30X