


Threaded M3

METAL STRAIN RELIEF

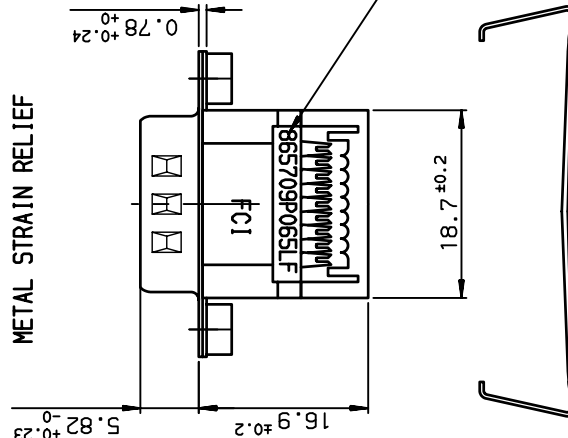

MARKING

### ELECTRICAL DATA

- Max current rating per contacts: 1.5A
- Contact resistance  $\leq 10\text{m}\Omega$
- Insulation resistance  $> 5000\text{M}\Omega$
- TEST VOLTAGE contact/contact  $> 1000\text{V}$
- Finish on contact area: gold over nickel
- Finish on terminal end : bright tin lead over nickel

### ENVIRONMENTAL DATA

- Climate category -55° C/125° C/21j
- Corrosion salt spray: 24h

Part number

8657L09P065TXLF

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	M. PESSON	2006/03/11	0.X $\pm 0.1$	size	Scale
Eng	M. PESSON	2006/03/11	0.XX $\pm 0.1$	A3	2
Chr	LEGARRE	2006/03/11	0.XXX $\pm 0.1$	ECN	L507-0041
Appr	LEGARRE	2006/03/11		D-SUB	Spec ref -
INSULATION DISPLACEMENT CONNECTION		Product family			
FOR FLAT CABLE		D-SUB			
FCI		Rev.			
		C01-8657-0611			
		CUSTOMER sheet 1 of 1			

### NOTE: RoHS INFORMATION

- The "LF" product meets European Union Directives and other country regulations as described in 65-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see 65-14-920.