FEATURES AND OPTIONS

- 15 pins in a 9 position shell
- 26 pins in a 15 position shell
- 44 pins in a 25 position shell
- 62 pins in a 37 position shell
- Hardware options include: threaded inserts, hex stand-offs, board locks and grounding straps
- Gold plated contacts
- Tin plated shell

SPECIFICATIONS

MATERIALS

Shell: Tin plated steel
Insulator: PBT thermo plastic, black color, 30% glass filled self-extinguishing, UL94V-0 rated
Contact material: Pin: Brass
Socket: Phosphor Bronze
Contact plating: Gold over nickel

ELECTRICAL

Current rating: 5.0 Amps
Dielectric strength: 1000Vac min.
Insulation resistance: 5000M ohm min.
Operating temperature range: -55°C~ to +125°C

HOW TO ORDER

AHDFXXA-KG-TXXX-R (RoHS Compliant)

- B = Boardlocks
- G = Grounding straps
- X = Without
- S = Hex stand-offs
- X = Without
- A = Threaded inserts
- X = Without
- XX = Number of contacts

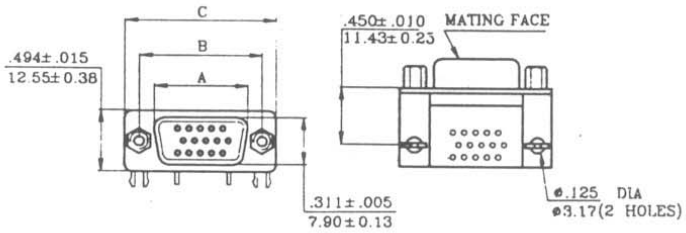





26, 44, 62 POSITIONS



15 POSITIONS

DIMENSIONS

# of pins	A	B	C	E	F
15	16.33 0.643	24.99 0.984	30.81 1.213	7.04 0.277	2.29 0.090
26	24.66 0.971	33.32 1.312	39.14 1.541	6.88 0.271	2.29 0.090
44	38.38 1.511	47.04 1.852	53.04 2.088	6.88 0.271	2.29 0.090
62	54.84 2.159	63.50 2.500	69.32 2.729	6.99 0.275	2.41 0.095