

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S34A.GX00
15	39.14	33.32	25.18	24.54	19.18	D15S34A.GX00
25	53.03	47.04	39.12	38.25	33.12	D25S34A.GX00
37	69.32	63.50	55.68	54.71	49.68	D37S34A.GX00


Protection: 4 --> flash AU
6 --> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S34A.GX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S34A.GX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S34A.GX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S34A.GX00LF

Protection: 4 --> flash AU
6 --> 0.76µ AU

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

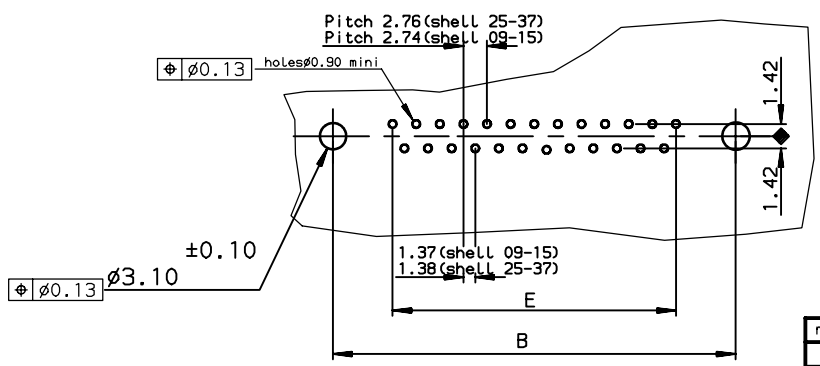

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	MASSON	2000/07/26	ANGULAR	0.X ± 0.1	size
Eng	PESSON	2000/07/26	LINEAR	0.XX ± 0.1	A3
Chr	LEGARE	2000/07/26	0.XX' ± 2'	0.XXX ± 0.1	Scale
Appr	LEGARE	2000/07/26	Product family	D-SUB	2
				ECN	LS06-0097
				Spec ref	-

rev	ecn no	dr	date
B	-	ATC	2000/12/28
C	LS05-001	MPE	2005/03/14
D	LS05-0056	MPE	2005/06/30
E	LS06-0097	LGO	2006/07/28
-	-	-	-
-	-	-	-
-	-	-	-

FCI title FEMALE CONNECTOR FOR FOOT
STRAIGHT SOLDER TYPE FOR

dwg no C01-8646-0717

catalog no -

CUSTOMER sheet 1 of 1

Rev. E

Copyright FCI. FCI