


PC card drilling dimensions (after plating)
(thickness 1.60 ± 0.20mm)

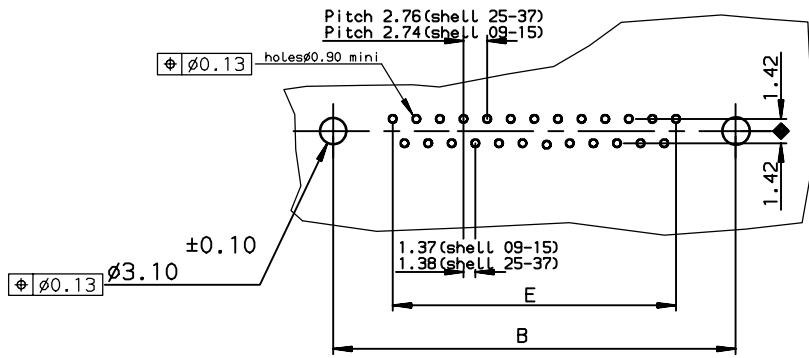

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P34A.GX00
15	39.14	33.32	25.18	25.12	19.18	D15P34A.GX00
25	53.03	47.04	39.12	38.84	33.12	D25P34A.GX00
37	69.32	63.50	55.68	55.30	49.68	D37P34A.GX00

Protection: 4 --> flash AU
6 --> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P34A.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P34A.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P34A.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P34A.GX00LF

Protection: 4 --> flash AU
6 --> 0.76µ AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 2
		TOLERANCES UNLESS OTHERWISE SPECIFIED		0.X ±0.1		
Dr	MASSON	2000/07/25	ANGULAR	0.XX ±0.1		
Eng	PESSON	2000/07/25	LINEAR	0.XXX ±0.1		
Chr	LEGARE	2000/07/25	0.XX' ±2'			
Appr	LEGARE	2000/07/25	Product family	D-SUB Spec ref -		
FCI title MALE CONNECTOR FOR FOOTPR straight solder type for		catalog no		dwg no C01-8646-0715		Rev. D

rev	ecn no	dr	date
A	-	-	2000/07/25
B	LS05-001	MPE	2005/03/14
C	LS05-0056	MPE	2005/06/30
D	LS06-0097	LGO	2006/07/28
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.