

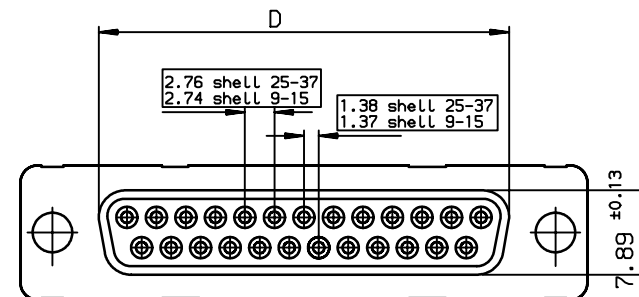
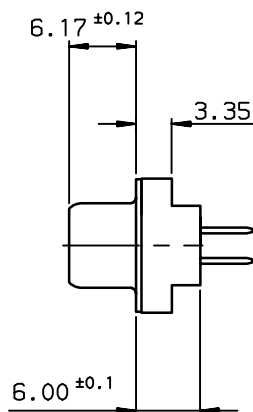



A

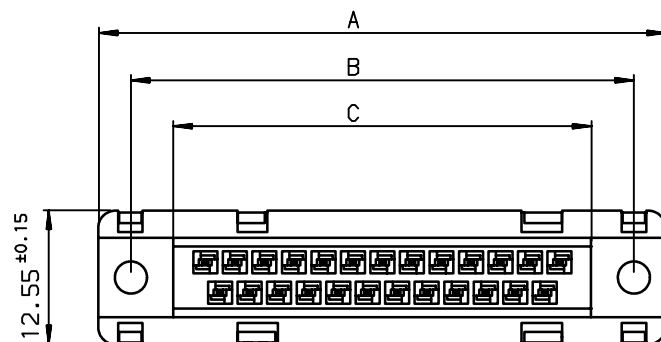

B

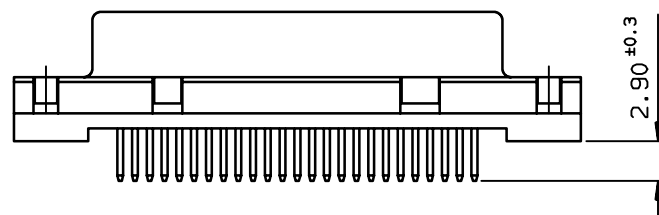

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

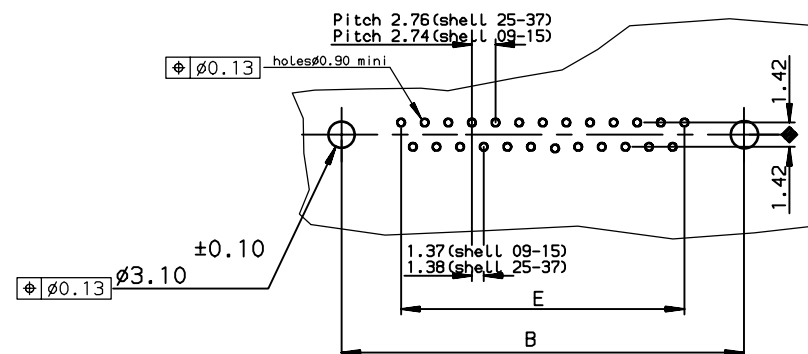

C

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PA00
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PA00
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PA00
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PA00

Protection: 4 --> flash AU
6 --> 0.76µ AU

D




LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PA00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PA00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PA00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PA00LF

Protection: 4 --> flash AU
6 --> 0.76µ AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	JOUBERT	1996/09/10	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2			
Eng	PESSON	1996/09/10			0.XX	±0.1					
Chr	LEGARE	1996/09/10			0.XXX	±0.1					
Appr	LEGARE	1996/09/10	Product family				D-SUB	Spec ref -			
			FEMALE CONNECTOR STD EUROPE				dwg no C01-8646-0490	Rev. D			
			title straight solder type for PCB 1.6mm								
catalog no				-				CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
A	-	JOU	1996/09/10
C	L505-001	MPE	2005/03/10
D	L506-0097	LGO	2006/07/28
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-