




view shown without grounding and plastic pin

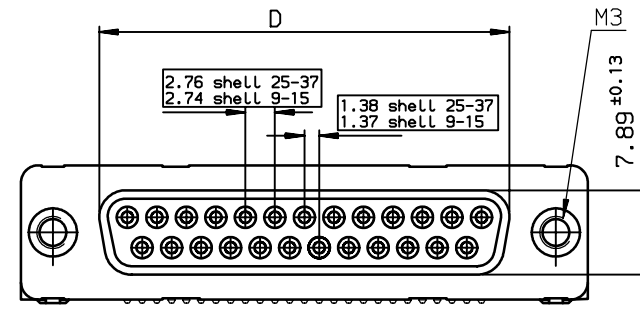

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.10 mm)

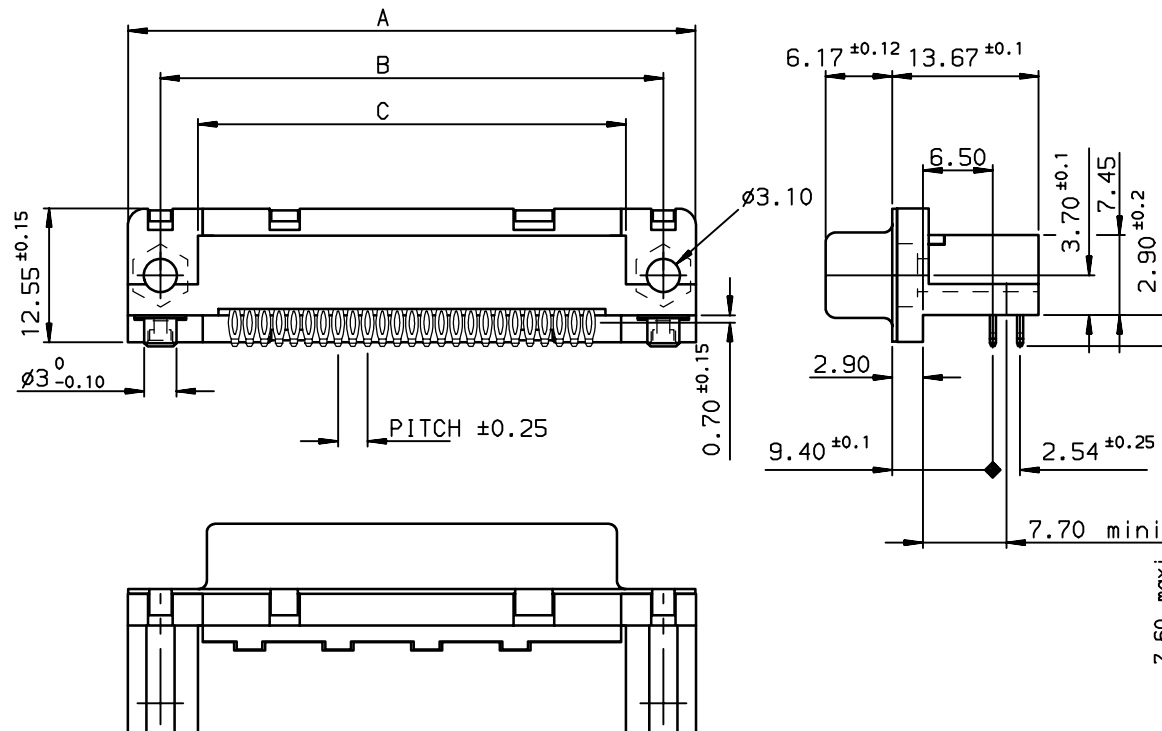

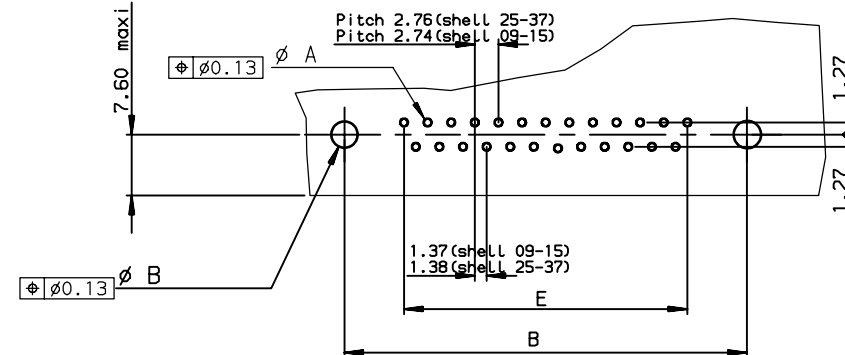


GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C01-8646-0001

European Views

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD	TIN LEAD	LEAD FREE	LEAD FREE
09	30.81	24.99	18.00	16.21	10.96	D09S82C4GL00	D09S82C6GL00	D09S82C4GL00LF	D09S82C6GL00LF
15	39.14	33.32	26.32	24.54	19.18	D15S82C4GL00	D15S82C6GL00	D15S82C4GL00LF	D15S82C6GL00LF
25	53.03	47.04	40.04	38.25	33.12	D25S82C4GL00	D25S82C6GL00	D25S82C4GL00LF	D25S82C6GL00LF
37	69.32	63.50	56.50	54.71	49.68	D37S82C4GL00	D37S82C6GL00	D37S82C4GL00LF	D37S82C6GL00LF
Gold flash						0,76 µ gold	0,76 µ gold	Gold flash	0,76 µ gold

rev	ecn no	dr	date
G	-	MAS	1999/07/23
H	LS05-004	LMA	2005/01/11
J	LS06-0097	LGO	2006/07/29
K	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	PESSON	1994/03/16	ANGULAR	LINEAR	0.X		±0.1		size A3	Scale 2	
Eng	PESSON	1994/03/16			0.XX		±0.1				
Chr	-	-			0.XX' ±2"		±0.1				
Appr	LEGARE	1994/03/16	Product family				D-SUB		Spec ref -		
			FEMALE CONNECTOR DELTA D EUROSTYLE				dwg no		C01-8646-0227		Rev.
			RIGHT ANGLED PRESS-FIT								K
catalog no			-				CUSTOMER		sheet	of 1	