

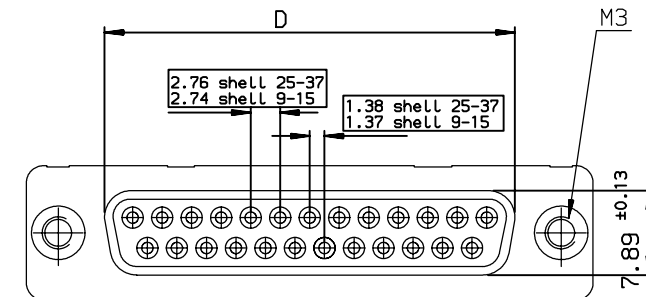
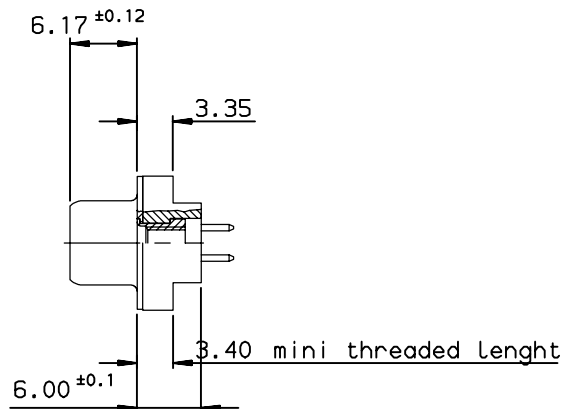



A

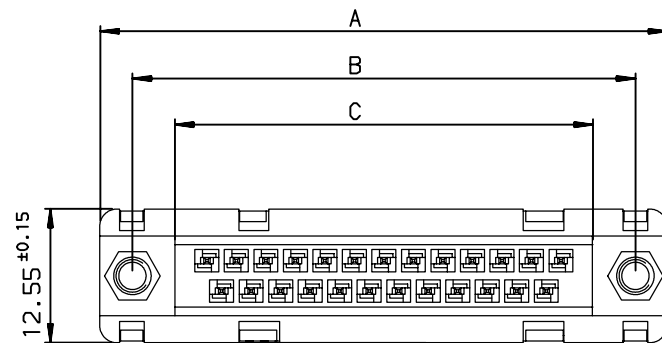

B

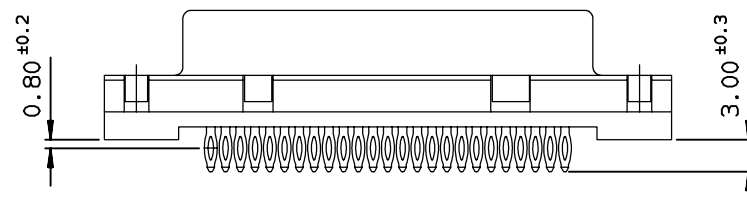

PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

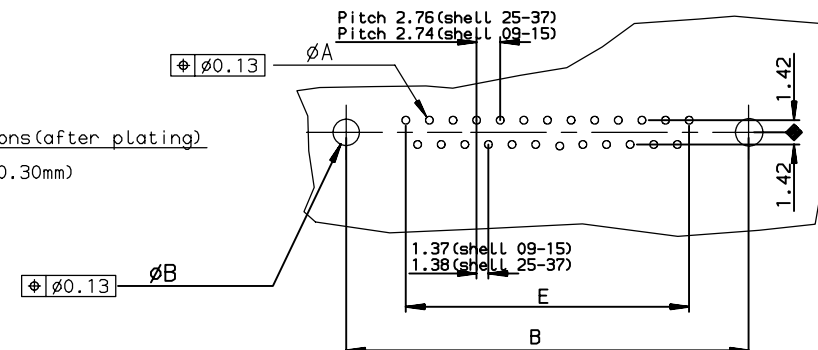

TIN LEAD PART NUMBER




SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S91C4PL00	D09S91C6PL00	D09S91C8PL00
15	39.14	33.32	25.18	24.54	19.18	D15S91C4PL00	D15S91C6PL00	D15S91C8PL00
25	53.03	47.04	39.12	38.25	33.12	D25S91C4PL00	D25S91C6PL00	D25S91C8PL00
37	69.32	63.50	55.68	54.71	49.68	D37S91C4PL00	D37S91C6PL00	D37S91C8PL00
						gold flash	0.76μ gold	1.25μ gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S91C4PL00LF	D09S91C6PL00LF	D09S91C8PL00LF
15	39.14	33.32	25.18	24.54	19.18	D15S91C4PL00LF	D15S91C6PL00LF	D15S91C8PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S91C4PL00LF	D25S91C6PL00LF	D25S91C8PL00LF
37	69.32	63.50	55.68	54.71	49.68	D37S91C4PL00LF	D37S91C6PL00LF	D37S91C8PL00LF
						gold flash	0.76μ gold	1.25μ gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	JOUBERT	1995/03/24	ANGULAR	LINEAR	0.X		±0.1		size A3	Scale 2	
Eng	PESSON	1995/03/24			0.XX		±0.1				
Chr	LEGARE	1995/03/24			0.XXX		±0.1				
Appr	LEGARE	1995/03/24	0.XX' ±2'						ECN LS06-0140		
			Product family					D-SUB		Spec ref -	
			title FEMALE CONNECTOR DELTA D STRAIGHT PRESS-FIT					dwg no C01-8646-0128		Rev. J	
			catalog no					-		CUSTOMER sheet 1 of 1	