


PC card drilling dimensions
(after plating - thickness: 1.60 mm) ±0.10

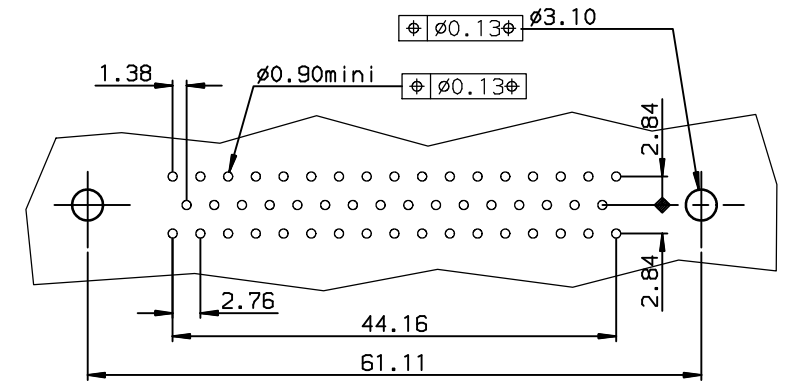

TIN LEAD PART NUMBER
Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

LEAD FREE PART NUMBER
Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

Part number D50P24A*GX00

Part number D50P24A*GX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	PESSON	1995/07/12	ANGULAR	LINEAR
Eng	PESSON	1995/07/12	0.X	±0.1
Chr	LEGARE	1995/07/12	0.XX	±0.1
Appr	LEGARE	1995/07/12	0.XXX	±0.1
Product family			D-SUB	Spec ref -
title MALE CONNECTOR DELTA D 50-EUROPE		size A3		Scale 2
straight solder, harpoon.nut		ECN LS06-0095		Rev. D
catalog no		CUSTOMER		sheet 1 of 1

rev	ecn no	dr	date
B	-	MLE	1996/11/14
C	LS05-001	MPE	2005/03/10
D	LS06-0095	LGO	2006/06/28
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCI. FCI