


PC board drilling dimensions  
(after plating - thickness: 1.60 to 3.20 mm)





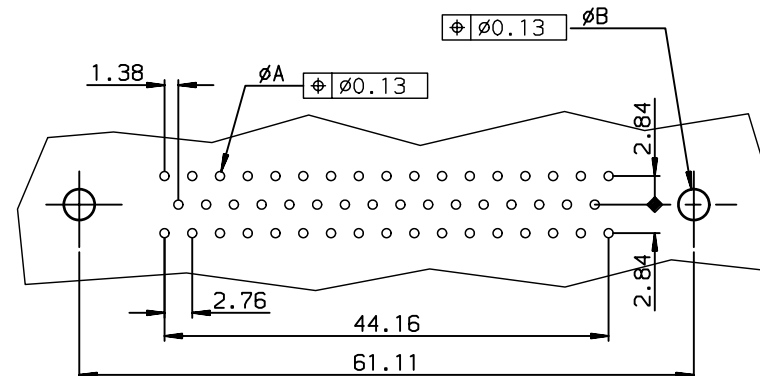

flash gold	D50P91C4GI00LF
0.76μ gold	D50P91C6GI00LF

SEE DRAWING C01-8646-0001

## European Views

rev	ecn no	dr	date
A	-	LEN	1996/09/17
B	LS05-004	MPE	2005/02/12
C	LS06-0095	LGO	2006/07/20
D	LS06-0140	LGO	2006/11/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302 		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	PESSON	1996/09/17	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2		
Eng	PESSON	1996/09/17			0.XX	±0.1				
Chr	LEGARE	1996/09/17			0.XXX	±0.1		ECN LS06-0140		
Appr	LEGARE	1996/09/17	Product family				D-SUB	Spec ref -		
			title MALE CRS DELTA D 50 EUROPE straight PF screwLock M3				dwg no C01-8646-0500		Rev. D	
catalog no			-				CUSTOMER		sheet	of 1