

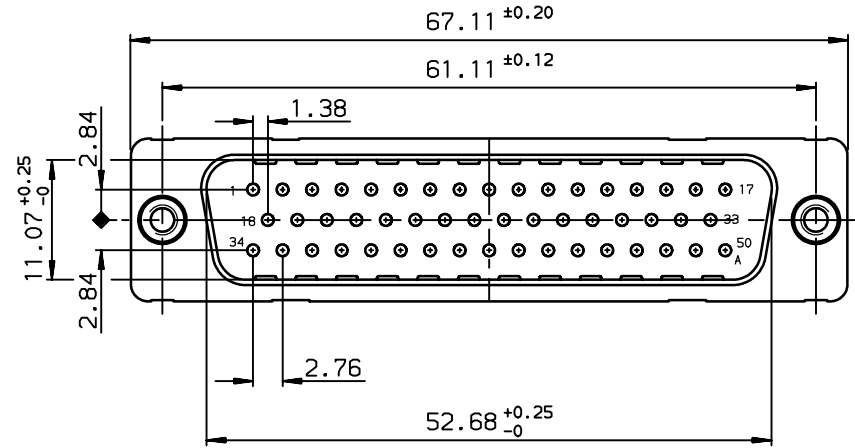



A

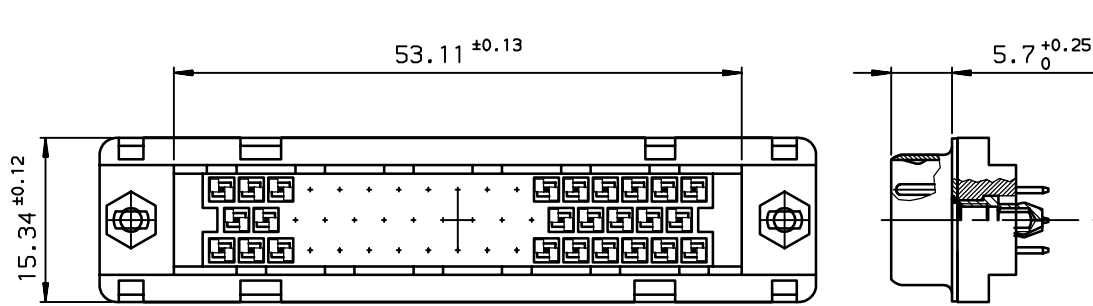

B

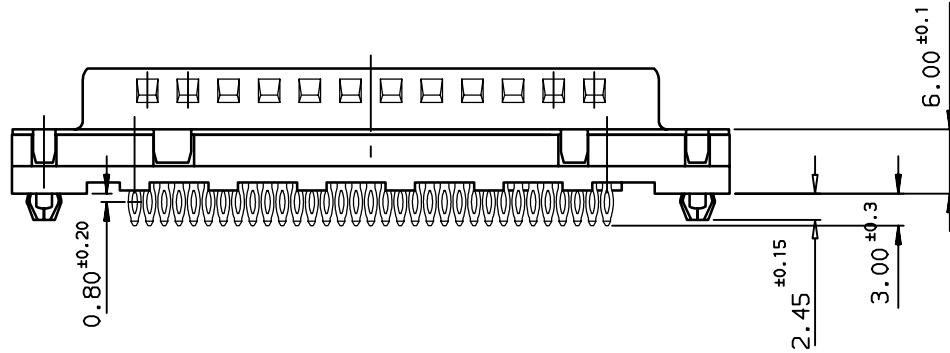

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

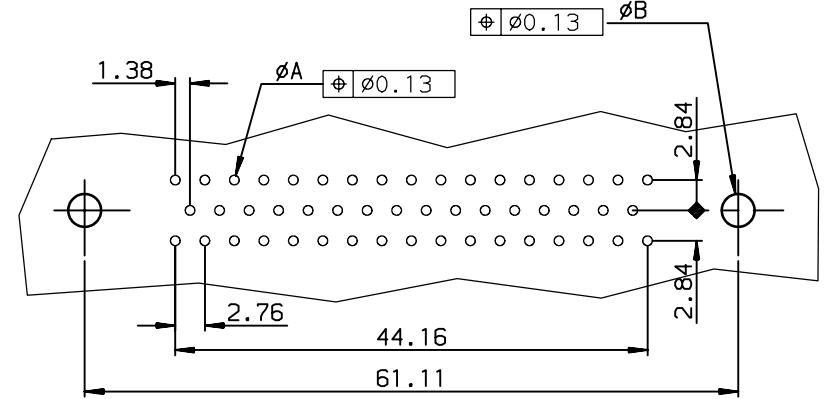

C

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50P91C4GL00
0.76µ gold	D50P91C6GL00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50P91C4GL00LF
0.76µ gold	D50P91C6GL00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	PESSON	1995/10/03	ANGULAR	0.X ±0.1	size A3
Eng	PESSON	1995/10/03	LINEAR	0.XX ±0.1	Scale 2
Chr	LEGARE	1995/10/03	0.XX' ±2'	0.XXX ±0.1	ECN LS06-0140
Appr	LEGARE	1995/10/03	Product family	D-SUB	Spec ref -
FCI		MALE CONNECTOR DELTA D 50-EUROPE		dwg no	C01-8646-0377
		straight press fit		Rev.	E
catalog no				CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
B	-	LEN	1996/07/25
C	LS05-004	MPE	2005/02/10
D	LS06-0095	LGO	2006/06/28
E	LS06-0140	LGO	2006/09/25
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.

D