


PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

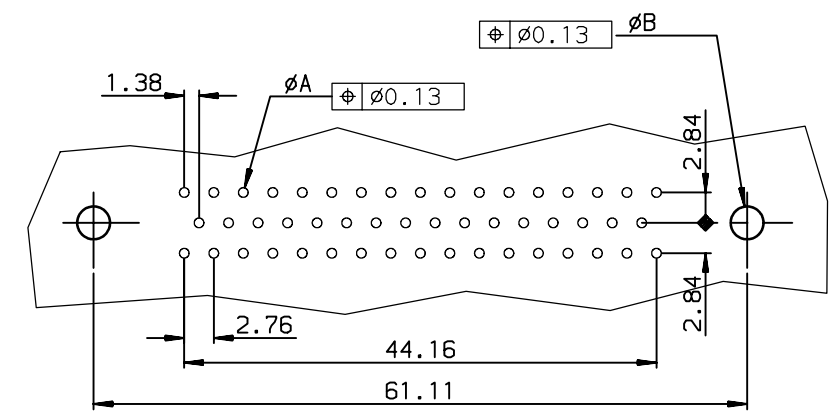

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50P91C4GV00
0.76µ gold	D50P91C6GV00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50P91C4GV00LF
0.76µ gold	D50P91C6GV00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 2
TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	PESSON	1995/10/03	ANGULAR	0.X	±0.1	ECN L506-0140
Eng	PESSON	1995/10/03	LINEAR	0.XX	±0.1	
Chr	LEGARE	1995/10/03	0.XX' ±2'	0.XXX	±0.1	Spec ref -
Appr	LEGARE	1995/10/03	Product family	D-SUB		
FCI		title MALE CONNECTOR DELTA D 50			dwg no C01-8646-0256	Rev. G
catalog no		-			CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
E	L506-0074	MPE	2006/05/09
F	L506-0097	LGO	2006/07/29
G	L506-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.