




A

A

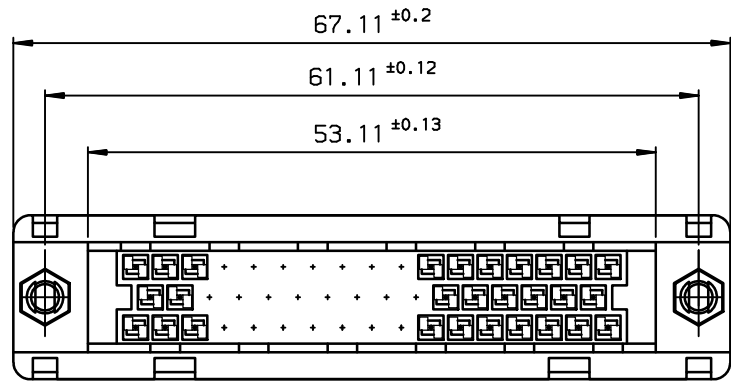


thread. UNC4-40x2

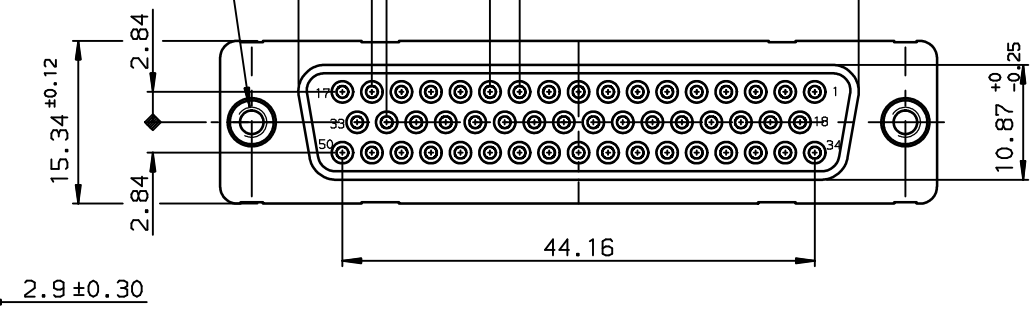


B

B

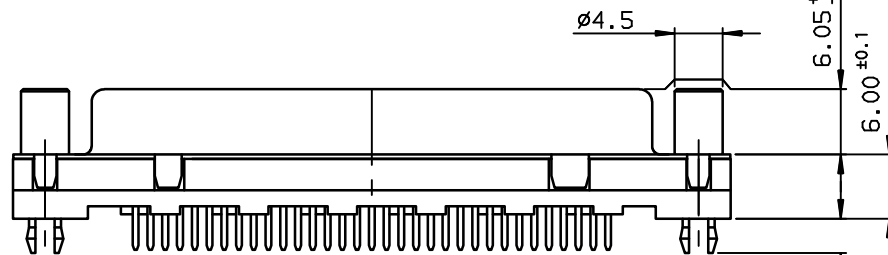

PC CARD DRILLING DIMENSIONS
Thickness 1.6 mm

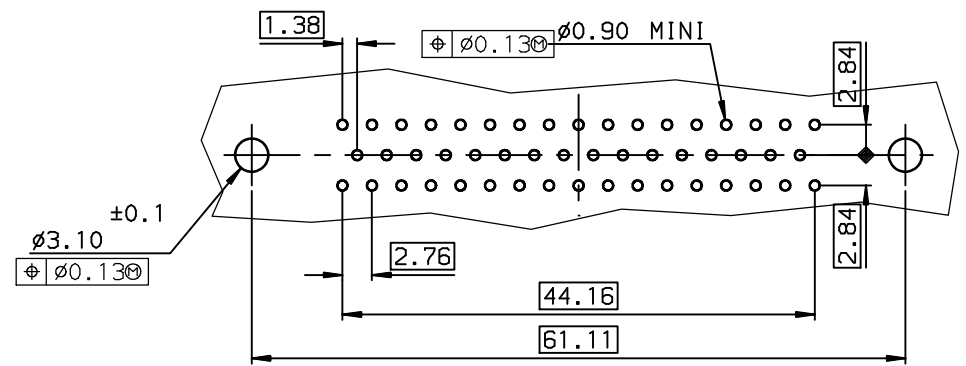

C

C

TIN LEAD PART NUMBER

Part number D50S24A*GV00

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

LEAD FREE PART NUMBER

Part number D50S24A*GV00LF

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

D

D

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 2
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	JOUBERT	1996/08/23	0.X	±0.1	ECN	L506-0095
Eng	PESSON	1996/08/23	0.XX	±0.1	Spec ref	-
Chr	LEGARE	1996/08/23	0.XX' ±2'	±0.1		
Appr	LEGARE	1996/08/23	Product family		D-SUB	

rev	ecn no	dr	date
B	-	JOU	1996/11/14
C	L505-001	MPE	2005/03/14
D	L506-0095	LGO	2006/06/29
-	-	-	-
-	-	-	-
-	-	-	-

FCI title FEMALE CONNECTOR DELTA D 50-EUROPE
straight solder, harpoon, screwLock. dwg no C01-8646-0479 Rev. D

catalog no - CUSTOMER sheet 1 of 1



Copyright FCI.