



A

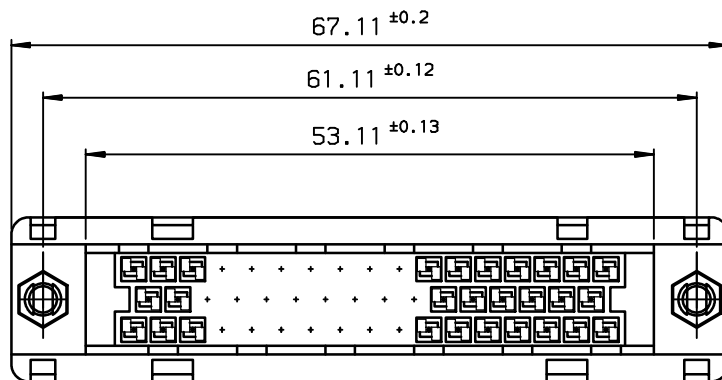

B

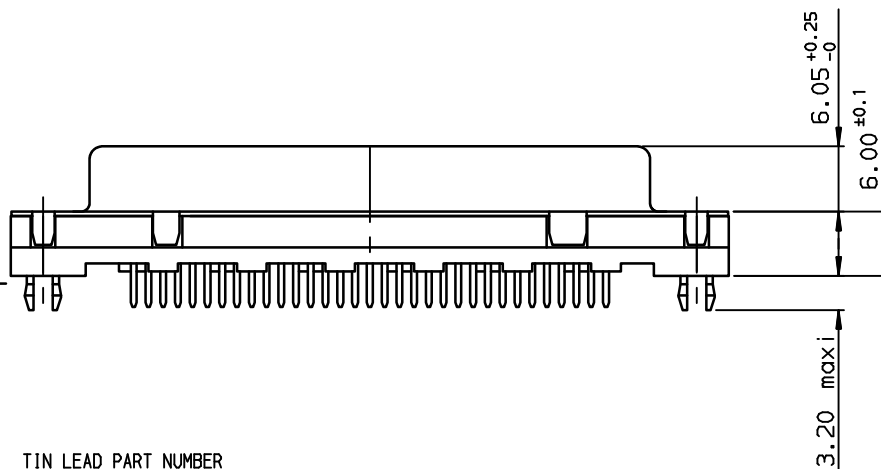

C

TIN LEAD PART NUMBER

Plating: 4 --> flash AU


Part
number

D50S24A*GX00

LEAD FREE PART NUMBER


Plating: 4 --> flash AU
Plating: 6 --> 0.76μ AUPart
number

D50S24A*GX00LF

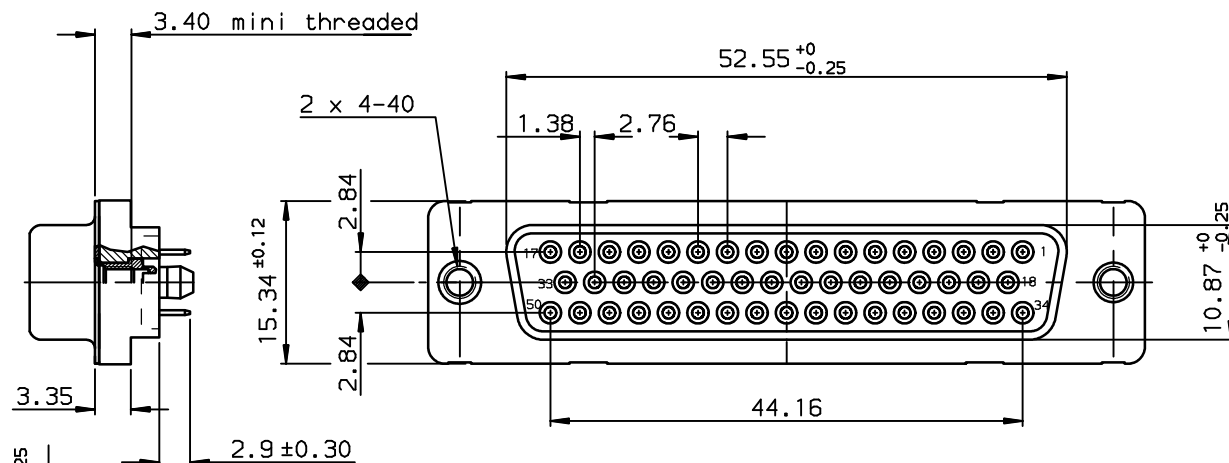

PC CARD DRILLING DIMENSIONS

Thickness 1.6 mm

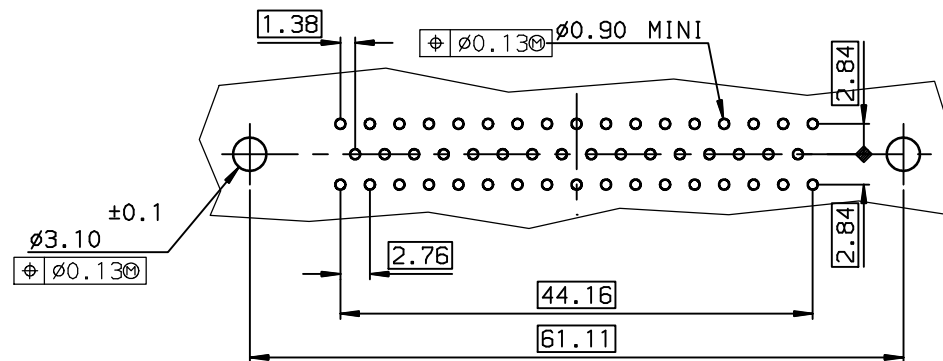

A




B

C

D

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 	mm 
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	PESSON	1995/07/12	ANGULAR	LINEAR	0.X	±0.1	size	Scale	
Eng	PESSON	1995/07/12			0.XX	±0.1	A3	2	
Chr	LEGARE	1995/07/12			0.XX' ±2°	0.XXX	±0.1	ECN	LS06-0095
Appr	LEGARE	1995/07/12	Product family				D-SUB	Spec ref -	
			title FEMALE CONNECTOR DELTA D 50-EUROPE straight solder, harpoon, nuts				dwg no C01-8646-0353		Rev. D
catalog no			-				CUSTOMER	sheet 1 of 1	

rev	ecn no	dr	date
B	-	MLE	1996/11/14
C	LS05-001	MPE	2005/03/10
D	LS06-0095	LGO	2006/06/28
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-