

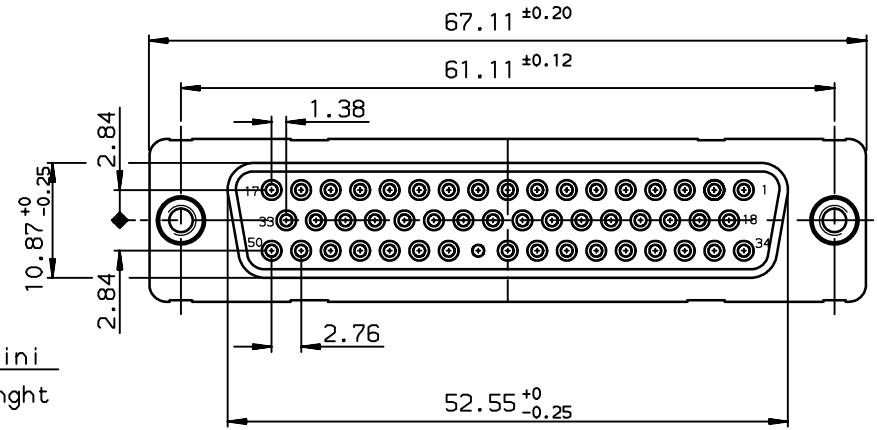
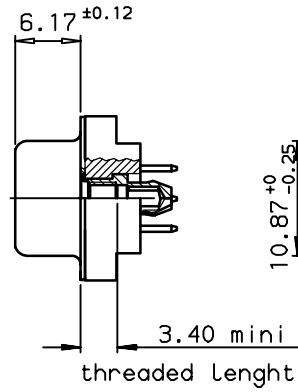



A

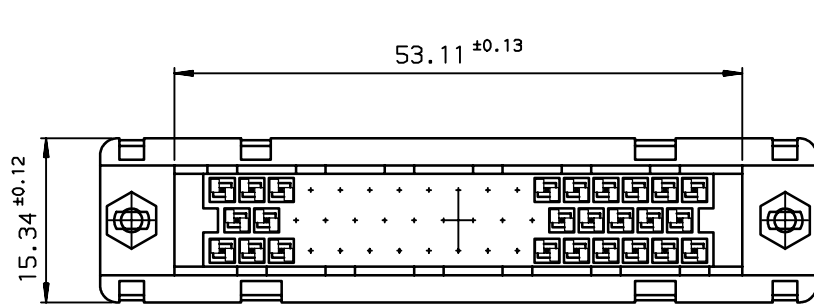

B

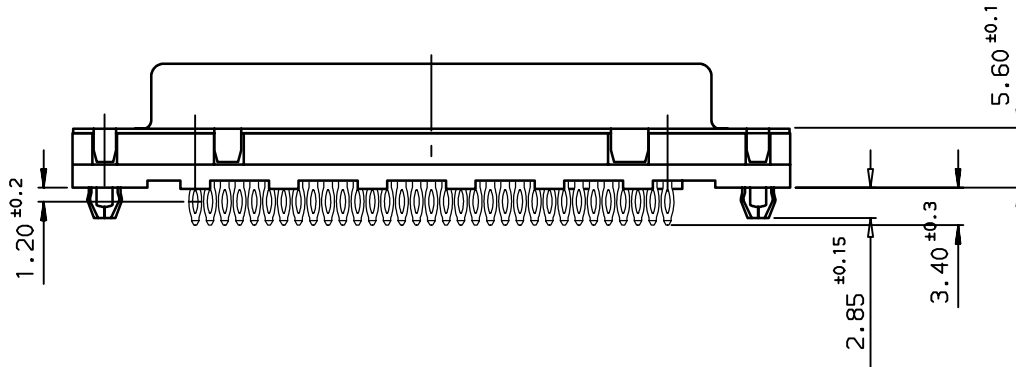

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

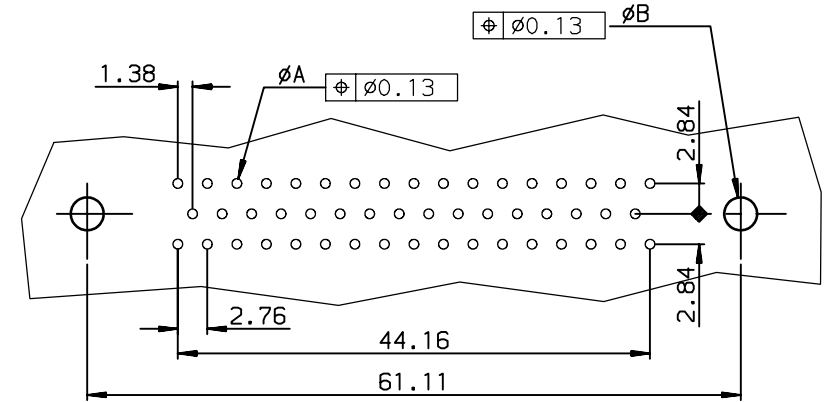

C

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S90C4GX00
0.76µ gold	D50S90C6GX00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S90C4GX00LF
0.76µ gold	D50S90C6GX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 2
TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	PESSON	1995/10/03	ANGULAR	0.X ±0.1	ECN L506-0140	
Eng	PESSON	1995/10/03	LINEAR	0.XX ±0.1	Spec ref -	
Chr	LEGARE	1995/10/03	0.XX' ±2'	0.XXX ±0.1		
Appr	LEGARE	1995/10/03	Product family		D-SUB	
FCI		FEMALE CONNECTOR DELTA LOW PROFIL			Rev. E	
title		straight press-fit			dwg no C01-8646-0376	
catalog no		-			CUSTOMER sheet 1 of 1	

rev	ecn no	dr	date
B	-	LEN	1996/07/25
C	LS05-004	MPE	2005/02/10
D	LS06-0095	LGO	2006/06/27
E	LS06-0140	LGO	2006/09/25
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.

D