


PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

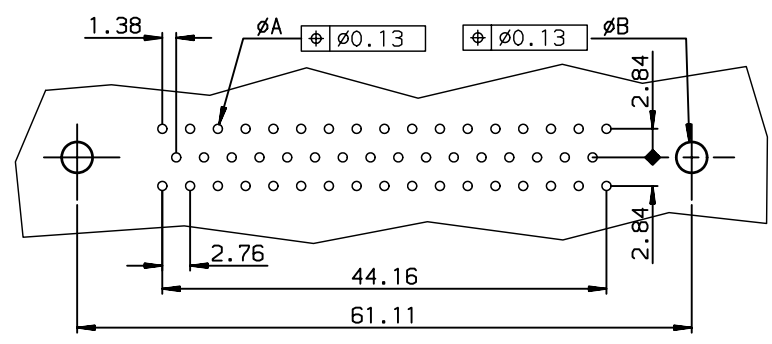

TIN LEAD PART NUMBER

D50S90C4PA00	D50S90C6PA00
Gold flash	0,76 μ gold

LEAD FREE PART NUMBER

D50S90C4PA00LF	D50S90C6PA00LF
Gold flash	0,76 μ gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
ANGULAR	LINEAR	0.X ±0.1	0.XX ±0.1	size A3
0.XX' ±2'		0.XXX ±0.1		Scale 2
Dr	M PESSON	2006/01/11		ECN LS06-0140
Eng	P LEGARE	2006/01/11		Spec ref -
Chr	-	-		
Appr	-	-	Product family D-SUB	
			FEMALE CONNECTOR DELTA D with straight press fit contact	
			dwg no	C01-8646-0431
			Rev.	E
			CUSTOMER	sheet 1 of 1

rev	ecn no	dr	date
C	LS06-0011	MPE	2006/01/11
D	LS06-0097	LGO	2006/07/29
E	LS06-0140	LGO	2006/11/21
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCj.