

1

2

3

4

A

B

C




D

A


B

C

D

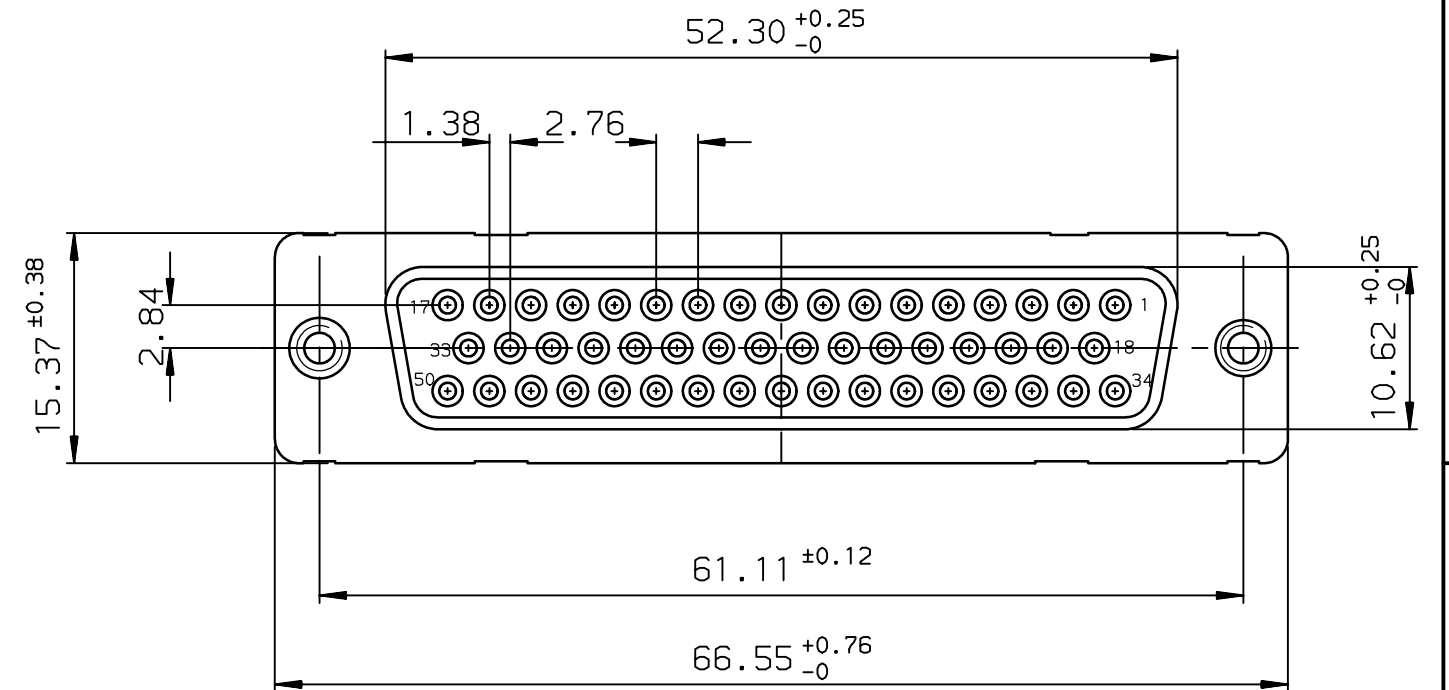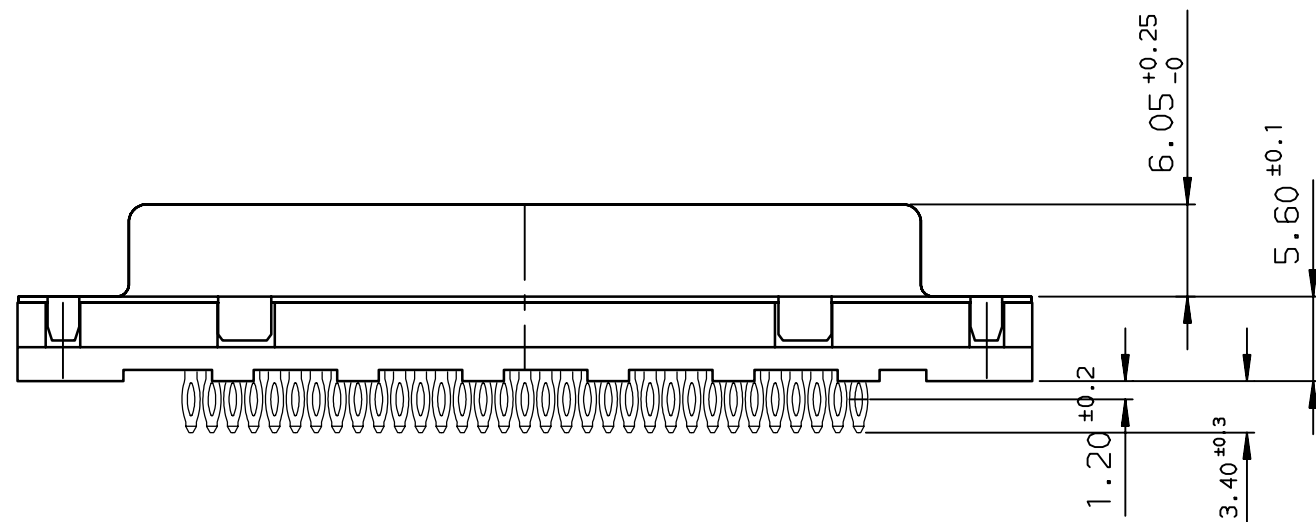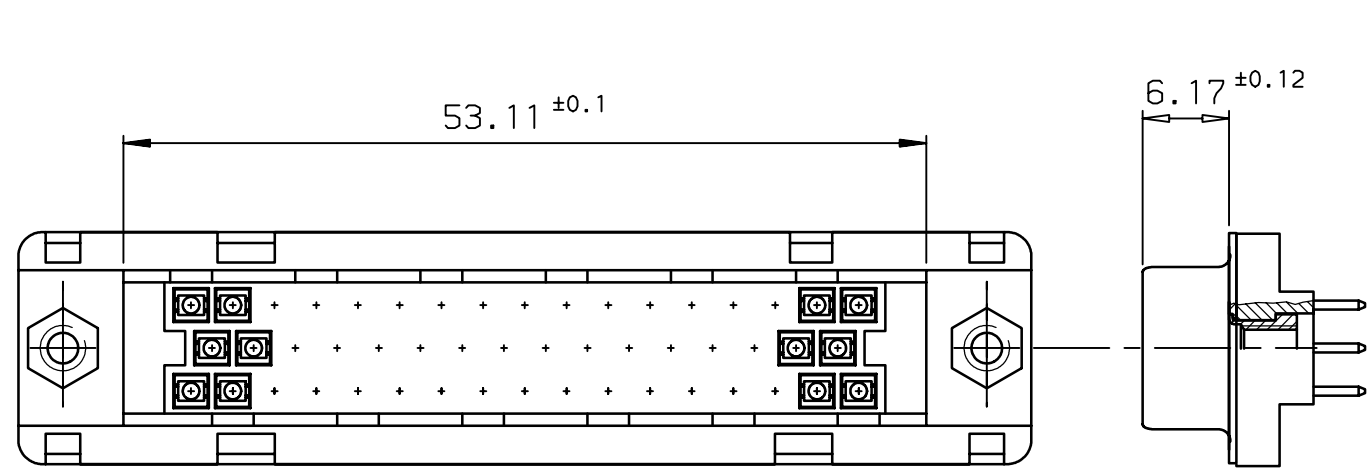

PC board drilling dimensions  
(after plating - thickness: 1.60 to 3.20 mm)

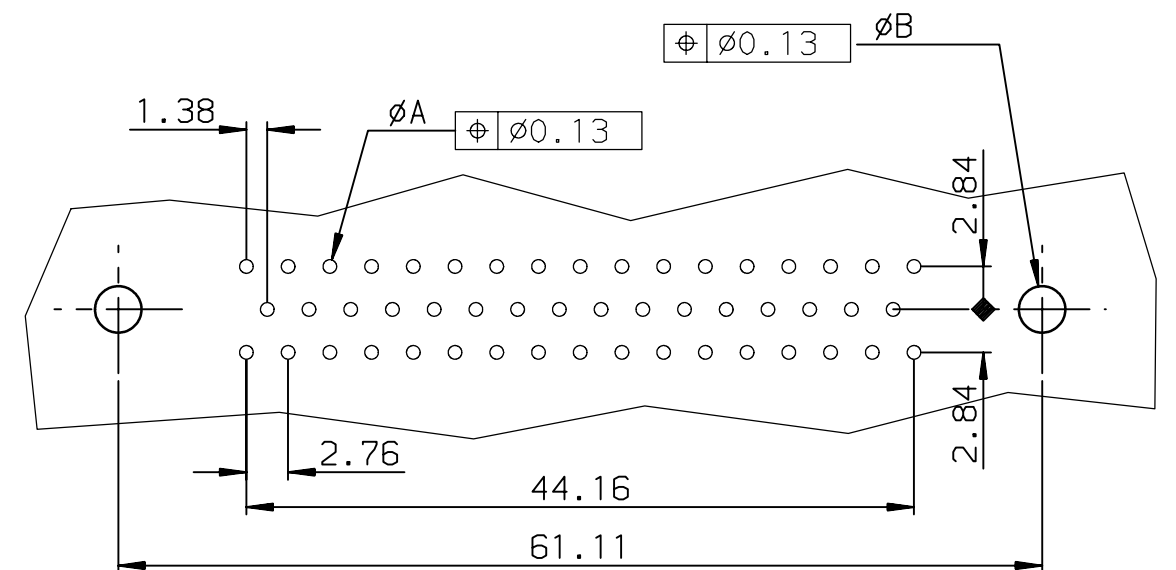

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S90C4PX00
0.76μ gold	D50S90C6PX00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S90C4PX00LF
0.76μ gold	D50S90C6PX00LF

rev	ecn no	dr	date
A	-	JOU	1996/07/26
B	LS05-004	MPE	2005/02/15
C	LS06-0095	LGO	2006/06/29
D	LS06-0140	LGO	2006/09/23
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				size A3
Dr	PESSON	1996/07/26	ANGULAR	Scale 2
Eng	PESSON	1996/07/26	LINEAR	ECN LS06-0140
Chr	LEGARE	1996/07/26	0.xx' ±2°	Spec ref -
Appr	LEGARE	1996/07/26	Product family	D-SUB
Title FEMALE CONNECTOR DELTA D LOW PROFIL STRAIGHT PRESS-FIT.		dwg no C01-8646-0465		Rev. D
catalog no		CUSTOMER sheet 1 of 1		



Copyright FCI.

1

2

3