


PC board drilling dimensions  
(after plating - thickness: 1.60 to 3.20 mm)



GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

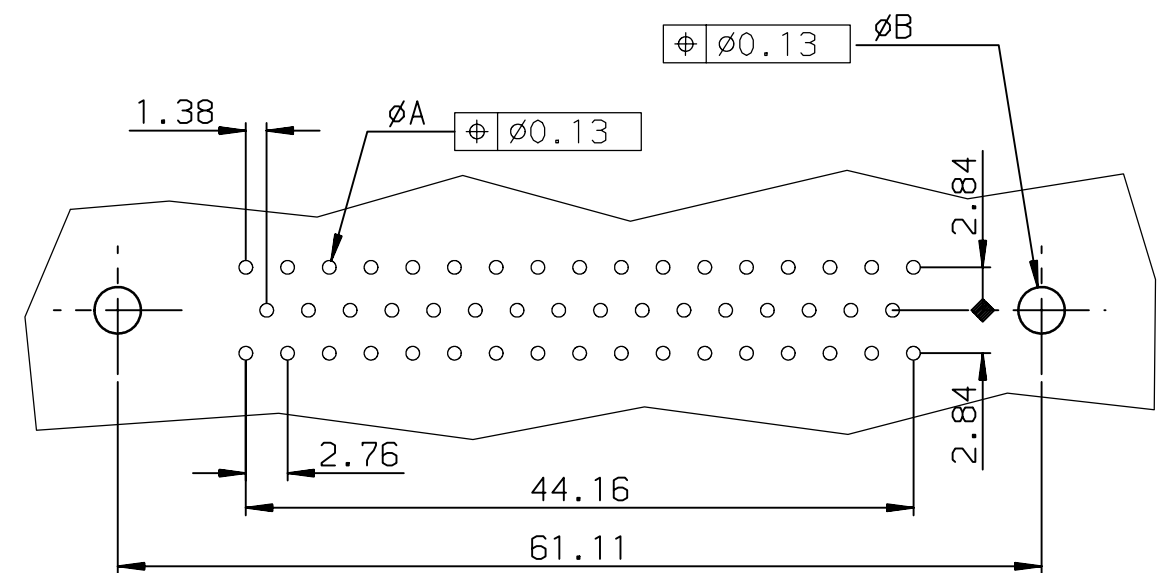


TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S91C4PV00
0.76µ gold	D50S91C6PV00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4PV00LF
0.76µ gold	D50S91C6PV00LF

rev	ecn no	dr	date
A	-	JOU	1996/08/12
B	LS05-004	MPE	2005/02/11
C	LS06-0095	LGO	2006/06/29
D	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 	mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	JOUBERT	1996/08/12	ANGULAR	LINEAR	0.X		±0.1	size	A3	Scale	
Eng	PESSON	1996/08/12			0.XX		±0.1			2	
Chr	LEGARE	1996/08/12			0.XX' ±2°		0.XXX	±0.1		ECN	LS06-0140
Appr	LEGARE	1996/08/12	Product family					D-SUB	Spec ref -		
			title FEMALE CONNECTOR DELTA D STD EUROPE STRAIGHT PRESS-FIT.					dwg no C01-8646-0478		Rev.	
										D	
catalog no			-			CUSTOMER		sheet 1 of 1			