

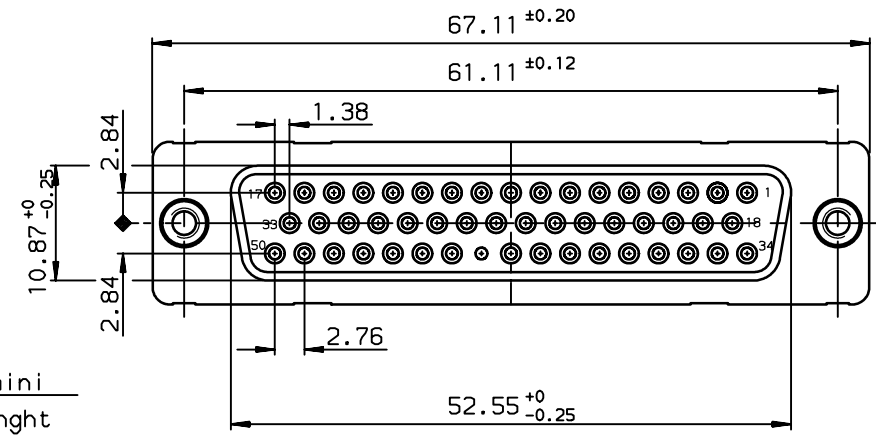


A

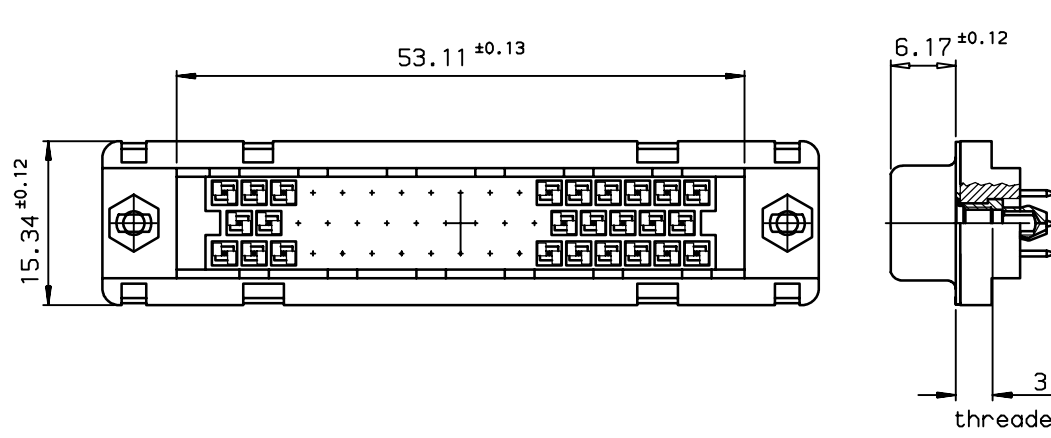

B

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

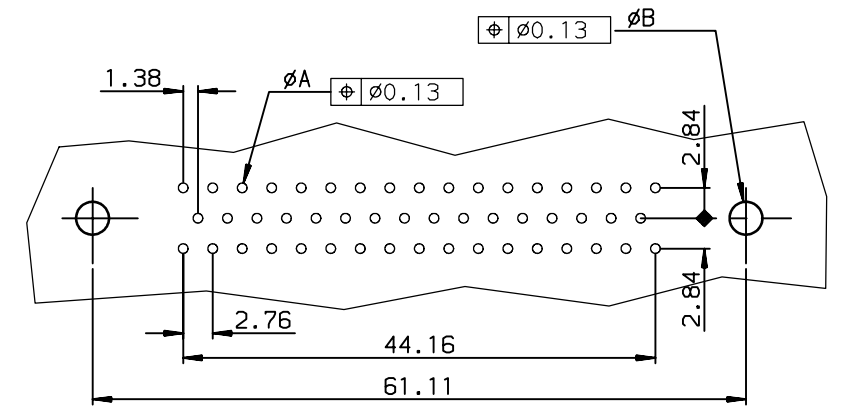

C

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S91C4GX00
0.76µ gold	D50S91C6GX00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4GX00LF
0.76µ gold	D50S91C6GX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

Copyright FCI.

D

rev	ecn no	dr	date
B	-	LEN	1996/07/25
C	LS05-004	MPE	2005/02/08
D	LS06-0095	LGO	2006/06/28
E	LS06-0140	LGO	2006/09/25
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 2
		TOLERANCES UNLESS OTHERWISE SPECIFIED			ECN LS06-0140	
Dr	PESSON	1995/10/03	0.X	±0.1	Spec ref -	
Eng	PESSON	1995/10/03	0.XX	±0.1		
Chr	LEGARE	1995/10/03	0.XX' ±2'	±0.1		
Appr	LEGARE	1995/10/03	Product family	D SUB		
FCI		FEMALE CONNECTOR DELTA D 50-EUROPE		dwg no	C01-8646-0374	
		straight press-fit		Rev.	E	
catalog no				CUSTOMER	sheet 1 of 1	