




**CHARACTERISTICS:**

Max current rating: 7.5A per standard contact  
 Dielectric withstanding voltage: 1000V minimum  
 Insulation resistance: >5000Ma  
 Contact resistance: <7.3ma  
 Mating and unmating forces: conform to MILC24308

Contact retention: 40N for contact size 20  
 Material of -insulator: green polyester class UL 94 V-0  
 -shell: Steel  
 -contact: brass

Plating of -shell: cadmium -lead  
 -contact: 0.40 μ AU  
 mating area, termination area: Sn Pb 2 μ mini

Contact diameter: 1 mm  
 Temperature range: -55°C,+125°C  
 Salt spray: -48 hours.  
 Damp heat: -56 days.

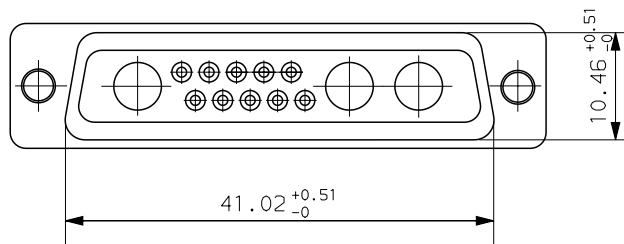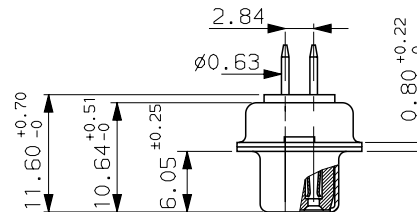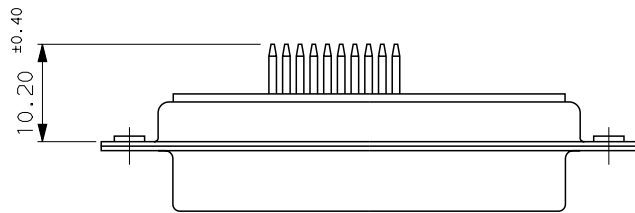

Part number		DBM13W3S300N	
a	05/03/01	Creation of drawing	--
ISS	DATE	Latest modification by : JARRY	MOD N°
Designed by: JARRY		date 05/03/01	Type of drawing: CLIENT
TITLE : SOCKET MARK I CONNECTORS 10 straight termination			SHEET 1/1
SCALE: 2			
		FRAMATOME CONNECTORS FRANCE Rue Louis Breguet - BP 05 72024 LE MANS Cedex Tel. 33 (16) 43.84.08.43	This document is the property of FRAMATOME CONNECTORS FRANCE It must not be reproduced or communicated without permission in writing from the owners
FORMAT	A3	SOURIAU DRG N°	PROJECT
		C01-8639-1872	M94D001