



DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C 'K 'D'
A	14-09-01	CONVERSION REVISION 06	KN	
B	04-06-05	105-0091	ALEX B	BKP
C	21-06-06	106-0080	VIVEK	BKP

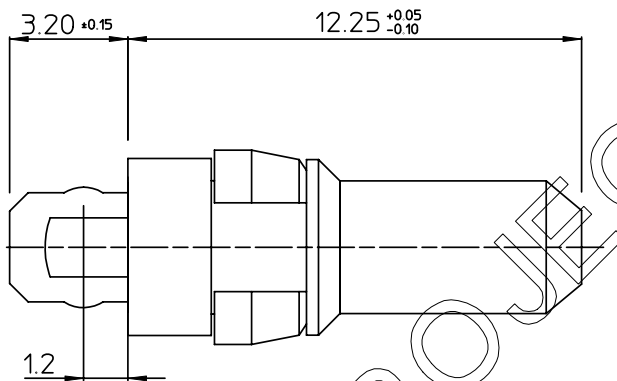

NOTE:

- FOR MISSING INFO SEE DRAWING BS,C ,201624,028
- LEAD FREE INDICATOR : LF = LEAD FREE  
  
 PLATING CODE (REF DWG No. BS,C ,201624,028)
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

PERFORMANCE CHARACTERISTICS:



- \*MIN. PRESS-FIT RETENTION FORCE : 20N
- \*MAX. CURRENT: 40 A
- \*ALLOWED PCB THICKNESS : MIN. 1.8 mm.
- \*MAX. CONTACT RESISTANCE: 5 mΩ

RECOMMENDED PLATED THROUGH HOLE:

- \*DRILLED HOLE : Ø 3.19 - 3.25 mm.
- \*FINISHED HOLE : Ø 3.02 - 3.20 mm.
- \*Cu PLATING : 25 µm MIN.
- \*Sn/SnPb PLATING : 5 µm MIN.

C

BS,A , 201624,016

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 2DEC ±0,1 ANGLES ±1°	<b>APPR.</b>			<b>DATE</b>			<b>SIGN.</b>			MALE EYE O/T NEEDLE PRESS-FIT POWER CONT.(STD)																					
	DRAFT			26-06-97			M.Fret			<b>CAT. No.</b> RM12PIE61-----																					
	CHECKED									 <a href="http://www.fciconnect.com">www.fciconnect.com</a>																					
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR.																									SCALE					
ALL DIMENSIONS IN MM	PR. ENG. MGR.									5 / 1																					
	PR. MGT. MGR.									<b>REFERENCES</b> 																					
																										BS,A , 201624,016 DRAWING NR. CUSTOMER DRAWING REVISION C					