


Male Style F


Series 8487 – 3 rows (3 x 16)

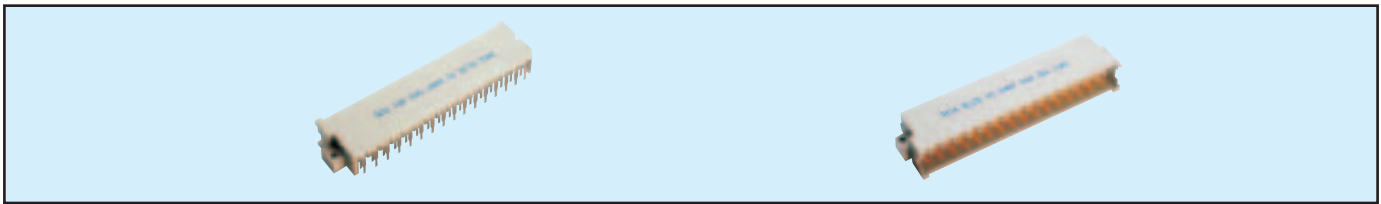

Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number Performance classes according to DIN 41612	
			II	I
 3.0 mm (Y) Right Angled Pitch 5.08	32	d + z fully loaded	10 8487 048 001 026	10 8487 048 001 050
	32	b + z fully loaded	10 8487 048 001 029	10 8487 048 001 053
	32	d + z fully, Ground in z2	59 8487 048 000 055	59 8487 048 000 061
	32	d + z fully, Ground in z2 + z32	59 8487 048 000 056	59 8487 048 000 062
	32	b + z fully, Ground in z2	59 8487 048 000 057	59 8487 048 000 063
	32	b + z fully, Ground in z2 + z32	59 8487 048 000 058	59 8487 048 000 063
	48	d + b + z fully loaded	10 8487 048 001 025	10 8487 048 001 049
	48	fully loaded + Ground in z2	59 8487 048 000 053	59 8487 048 000 059
	48	fully, Ground in z2 + z32	59 8487 048 000 054	59 8487 048 000 060
	48	fully loaded + Ground in b2 + b32	59 8487 048 000 066	59 8487 048 000 065
	48	fully loaded + Ground in d2 + d32	59 8487 048 000 069	59 8487 048 000 068

NB: Alternative Prefix Variations Available: 16, please refer to Page 10.
 Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

LOADING DESCRIPTION

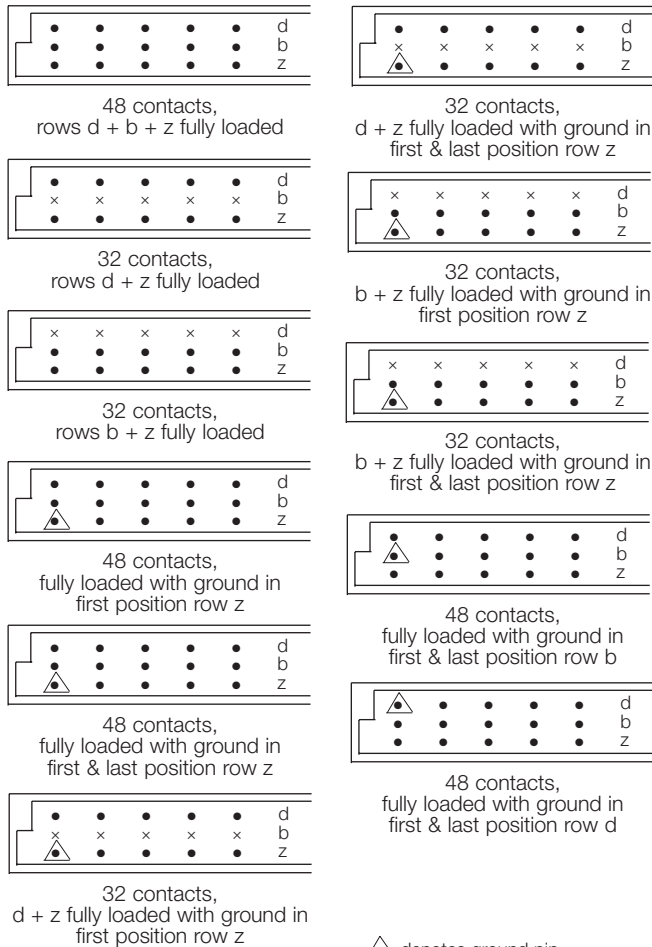

△ denotes ground pin

DIMENSIONS

