
Female Style H 11






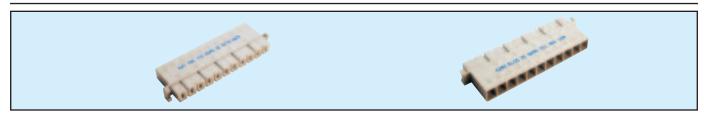

Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number Performance classes according to DIN 41612 I
	11	fully loaded	20 8450 011 001 169
Faston (6.3 x 0.8)	11	fully loaded with keying*	22 8450 011 001 169

NB: Connectors with Keying also require 10 pieces per connector pair of p/n 80 8456 8814 00 000 Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

LOADING DESCRIPTION



11 contacts, fully loaded

DIMENSIONS

