


Female Style F

Series 8487 – 3 rows (3 x 16)

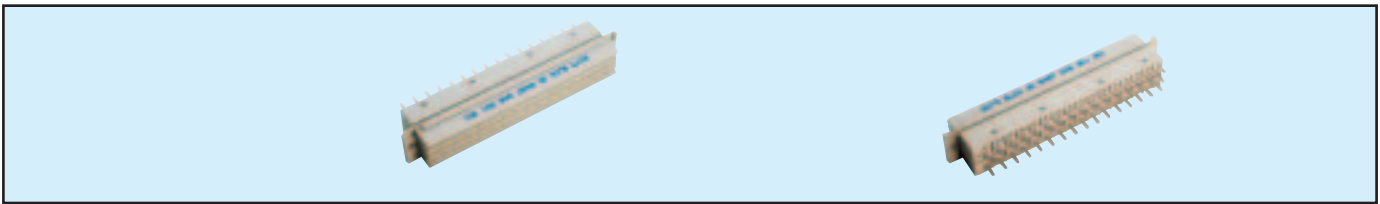

Contact Design and Termination Length	Number of Contacts	Loading Description	Part Number Performance classes according to DIN 41612	
			II	I
1 x 1 mm Post Profile 4.5 mm (X) Straight	48	d + b + z fully loaded	20 8487 048 001 025	20 8487 048 001 049
	32	d + z fully loaded	20 8487 048 001 026	20 8487 048 001 050
	32	b + z fully loaded	20 8487 048 001 029	20 8487 048 001 053
1 x 1 mm Post Profile 22.0 mm (X) Straight	48	d + b + z fully loaded	20 8487 048 002 025	20 8487 048 002 049
	32	d + z fully loaded	20 8487 048 002 026	20 8487 048 002 050
	32	b + z fully loaded	20 8487 048 002 029	20 8487 048 002 053
Solder eyelet 9.0 mm (X) Straight	48	d + b + z fully loaded	20 8487 048 003 025	20 8487 048 003 049
	32	d + z fully loaded	20 8487 048 003 026	20 8487 048 003 050
	32	b + z fully loaded	20 8487 048 003 029	20 8487 048 003 053
1 x 1 mm Post Profile 4.0 mm (X) Straight	48	d + b + z fully loaded	20 8487 048 004 025	20 8487 048 004 049
	32	d + z fully loaded	20 8487 048 004 026	20 8487 048 004 050
	32	b + z fully loaded	20 8487 048 004 029	20 8487 048 004 053
0.4 x 0.6 mm Post Profile 3.2 mm (X) Straight	48	d + b + z fully loaded	20 8487 048 005 025	20 8487 048 005 049
	32	d + z fully loaded	20 8487 048 005 026	20 8487 048 005 050
	32	b + z fully loaded	20 8487 048 005 029	20 8487 048 005 053

NB: Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

LOADING DESCRIPTION DIMENSIONS

