


used for: DIN EN 60603 TYPE "R"




**NOTES:**

1. INSULATORS: PBTP GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY  
PLATING: GOLD OVER NICKEL  
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 121A10559X CONEC ABC

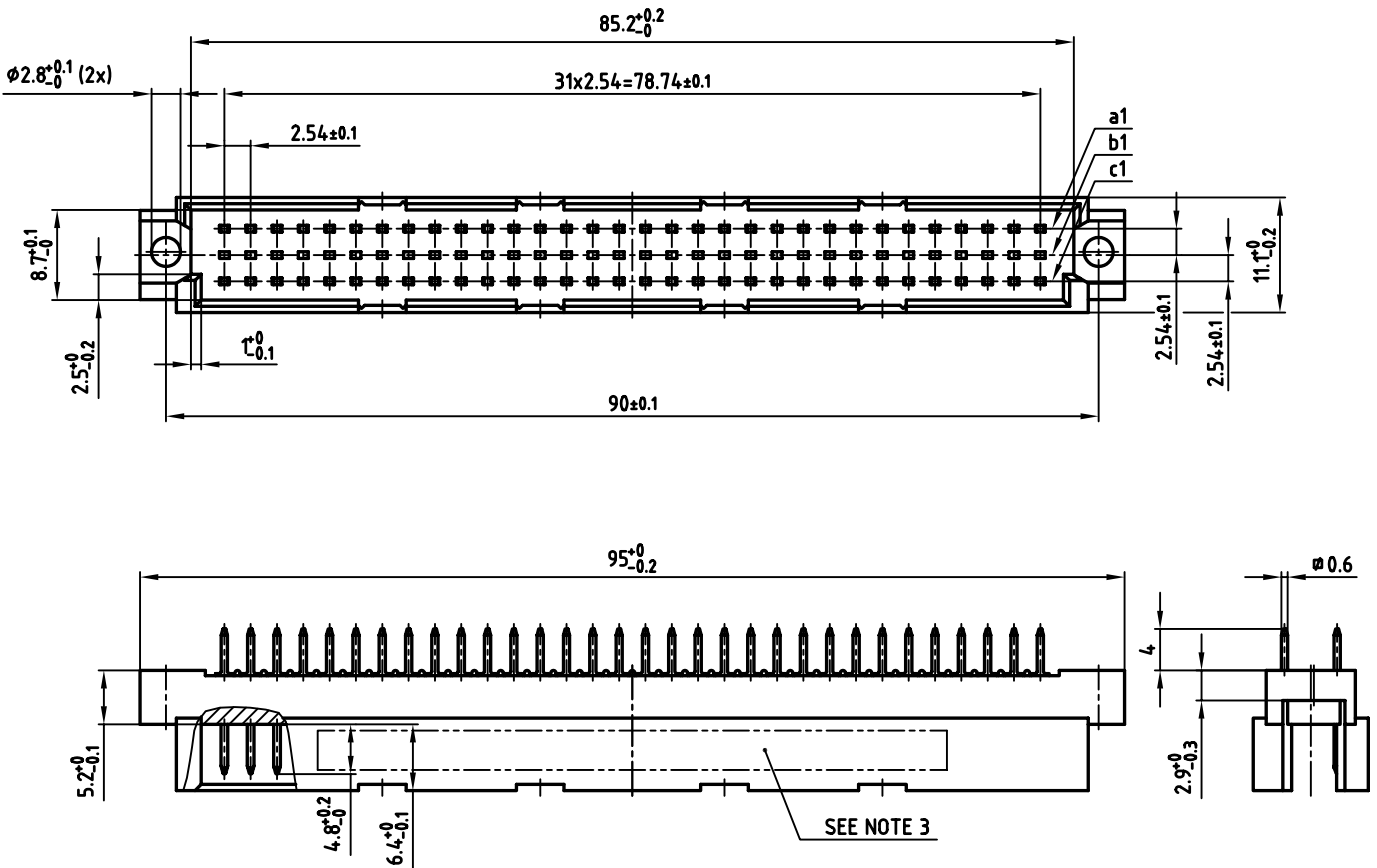

**P.C.B. HOLE DRILLINGS**

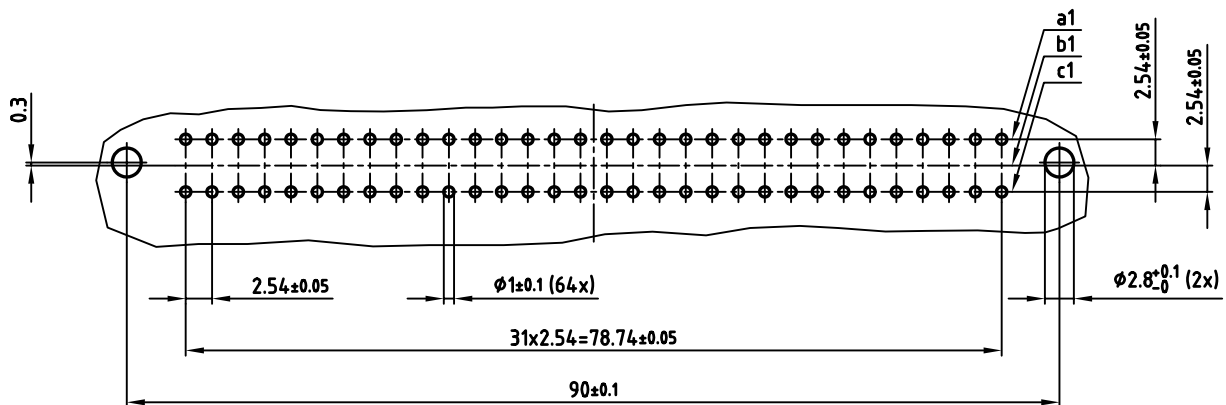

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC Gmbh DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		
2006	date	name
drawn	02.02.	Lehmenkühler
appd.	02.02.	Mickenbecker
norm	DIN EN 60603	
d-old		

scale: 2:1

material: SEE NOTES

title: **MALE CONNECTOR TYPE "R"**  
64pos. SOLDER PIN

dwg no: AutoCAD 2004 DIN-A

**12K1A418** 3 sh: 1/1

part no: **121A10559X**

