



DIMENSIONS mm (inches)

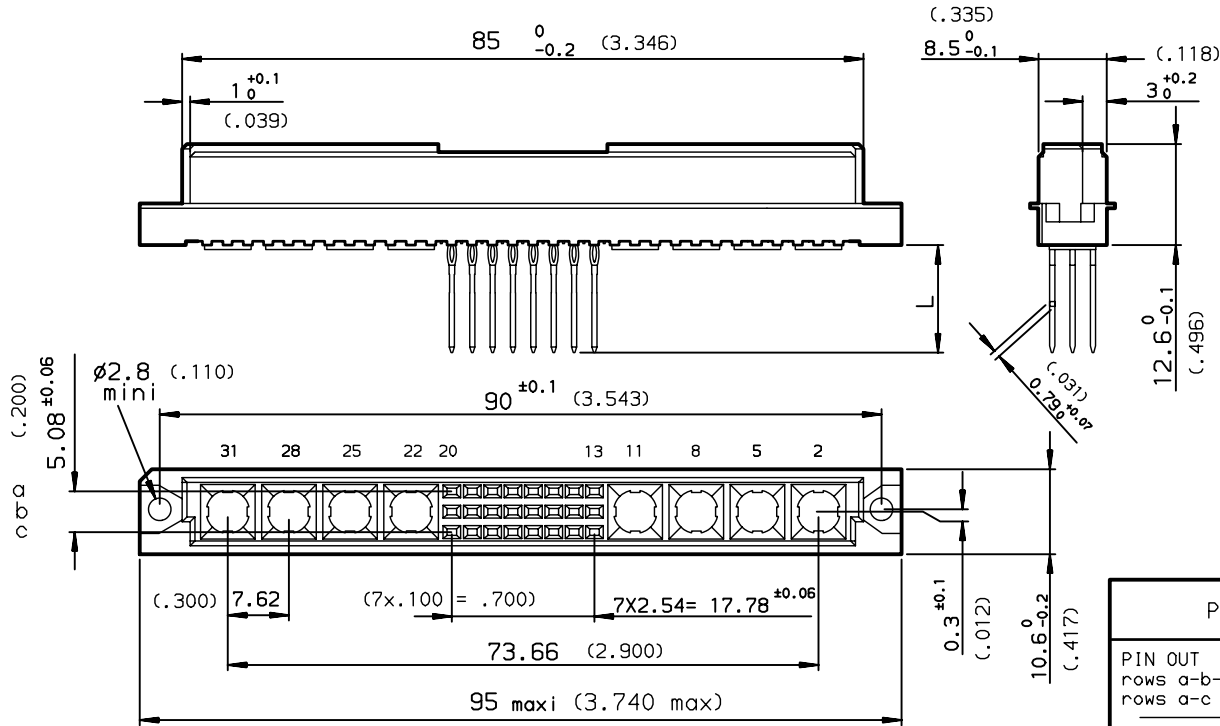


METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PCB DRILLING
component side

PERFORMANCES AS PER DIN 41612

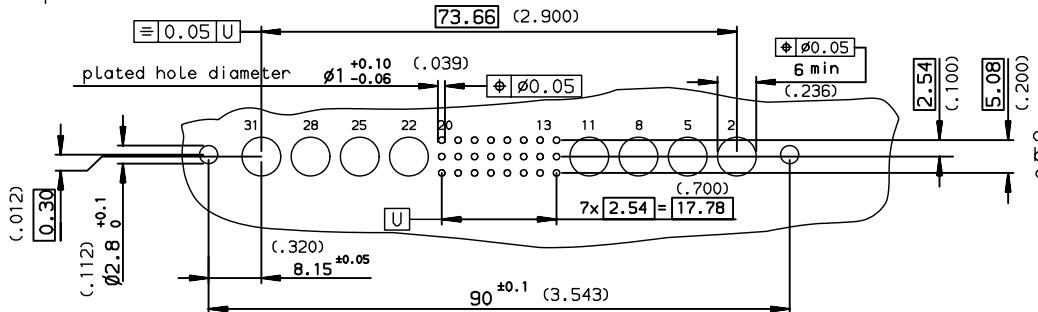

PART NUMBER	8609			H1		7	5	
PIN OUT								
rows a-b-c				3		24		
rows a-c				4		16		
NUMBER OF CONTACTS								
TERMINATION								
L = 13.10 ±0.20 (.515)				1 wrap				91
L = 17.10 ±0.20 (.673)				2 wraps				92
L = 3.00 ±0.20 (.118)				short post				94
PERFORMANCE CLASS								
DIN 41612 class 3								4
DIN 41612 class 2								5
DIN 41612 class 1								6
TERMINATION TYPE								
TIN LEAD								000E3
LEAD FREE								E3LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com	surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 1.5
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1997/01/27	ANGULAR	0.X	±0.1
Eng	TARON	1997/01/27	LINEAR	0.XX	±0.1
Chr	LEGARE	1997/01/27	0.XX' ±2'	0.XXX	±0.1
Appr	LEGARE	1997/01/27	Product family	DIN 8609	Spec ref -
FCI		title STRAIGHT FEMALE - STYLE M		Rev. D	
catalog no		-		C-8609-0558	
-		-		CUSTOMER sheet 1 of 1	

rev	ecn no	dr	date
B	-	ROU	1997/11/05
C	LS05-004	JTA	2005/02/28
D	LS06-0095	LGO	2006/07/13
-	-	-	-
-	-	-	-
-	-	-	-