

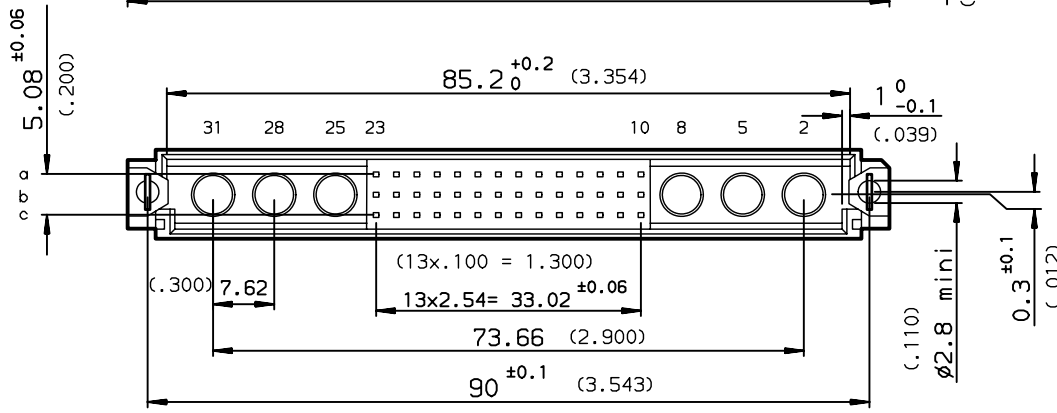


### DIMENSIONS mm (inches)

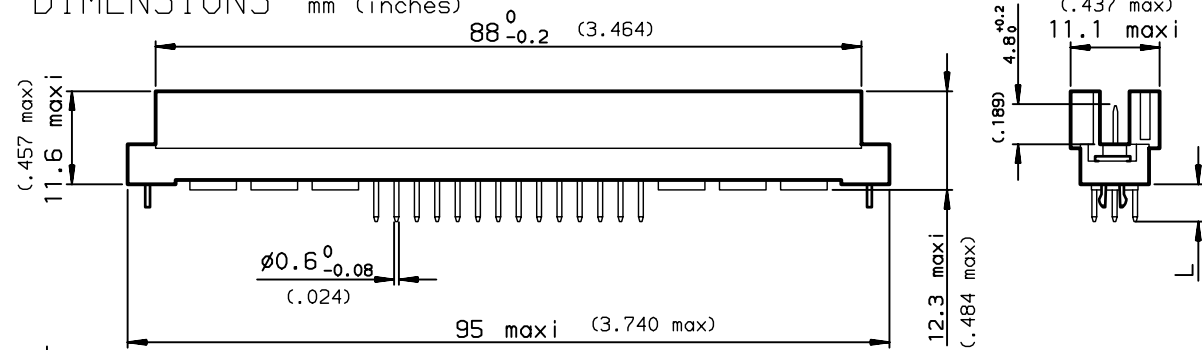

PART NUMBER		8609	<input type="checkbox"/>	<input type="checkbox"/>	E8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	5	<input type="checkbox"/>
PIN OUT		rows a-b-c		3	42	rows a-c		4	28	
NUMBER OF CONTACTS										
TERMINATION		L = 2.70 ±0.25 (.106)								24
		L = 4.65 ±0.25 (.183)								14
OPTIONS		no option								7
		with harpoons		- for PCB thickness 1.6 mm						H
				- for PCB thickness 2.4 mm						A
				- for PCB thickness 3.2 mm						R
PERFORMANCE CLASS		DIN 41612 class 3								4
		DIN 41612 class 2								5
		DIN 41612 class 1								6
TERMINATION TYPE		TIN LEAD								000E1
		LEAD FREE								E1LF

### PCB DRILLING

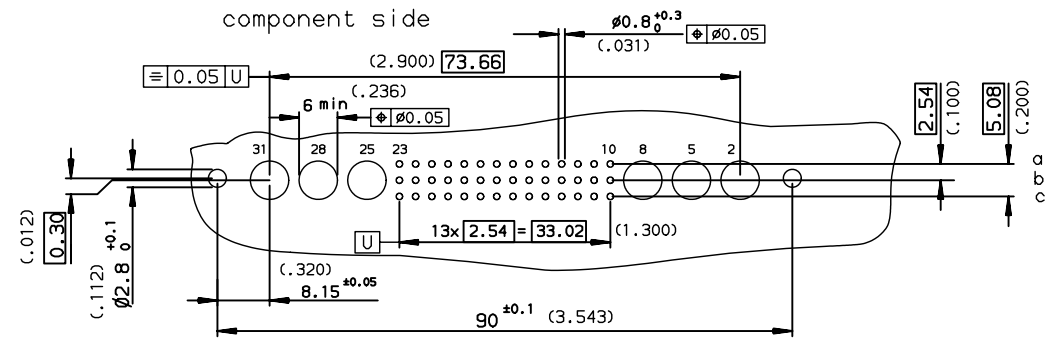

### GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm	
		ANGULAR		TOLERANCES UNLESS OTHERWISE SPECIFIED		LINEAR		size	Scale
		0.X		±0.1		0.XX		A3	
		0.XX ±2°		±0.1		0.XXX		ECN	
		Product family		DIN 8609		Spec ref		-	
Dr		ROUILLARD	1996/02/22	title		STRAIGHT MALE WITH SPECIAL CONTACTS		Rev.	
Eng		TARON	1996/02/22	SOLDER TO BOARD		C-8609-0506		C	
Chr		LEGARE	1996/02/22	catalog no		-		CUSTOMER sheet 1 of 1	
Appr		LEGARE	1996/02/22	dwg no		-			

rev	ecn no	dr	date
A	-	-	1996/02/22
B	LS05-001	JTA	2005/03/02
C	LS06-0095	LGO	2006/06/26
-	-	-	-
-	-	-	-
-	-	-	-



Copyright FCI.